



SECTION A-A

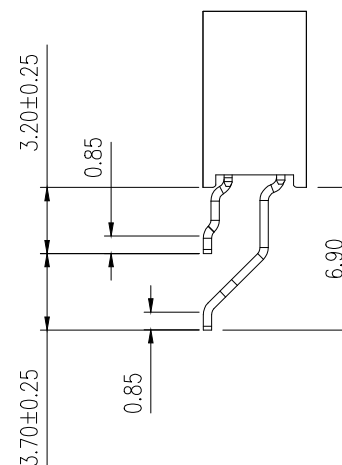

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

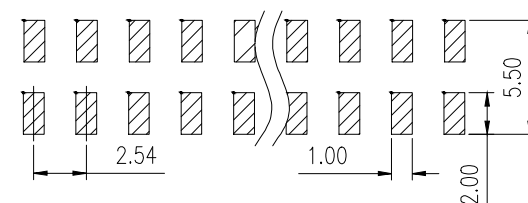

Notes:
 Insulator Material: PA9T +30%GF UL94V-0;
 Contact Material: Phosphor Bronze ;
 Contact Plating: Gold Flash over Nickel
 Current Rating: 3.0A;
 Withstanding Voltage: 1000V AC/Minute;
 Operation Temperature: -40°C to +105°C;
 Insulation Resistance: 1000MΩ Min;
 Contact Resistance: 20mΩ Max;
 Processing Temperature: 255°C for 5 seconds Max;
 Packing: Tape&Reel




RoHS compliant
Unit:mm

Scale	Free
TOLERANCE	
.X	±0.40
.XX	±0.25
.XXX	±0.15
DIM	TOL
X°	±5°
Angle	TOL

Drawn	21.04.2021	Winnie
Approved	21.04.2021	Winnie
Id.	Modification	Date
		Name


ASSMANN
WSW components

Description: Female Header	
SMT Pitch 2.54mm 2 Row	
ASSMANN WSW-No.	
A-BL-254Daxx-085GSR1	
Drawing-No.	ASS 8925 CO
Customer-No.	rev00
SHEET 1 / 2	

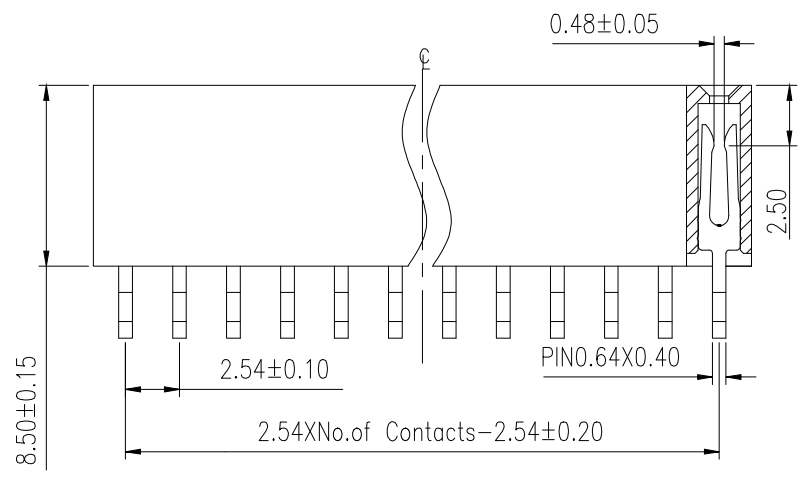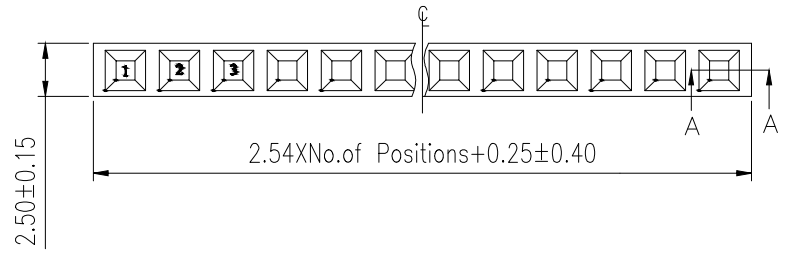

Notes:
 Insulator Material: PA9T +30%GF UL94V-0;
 Contact Material: Phosphor Bronze ;
 Contact Plating: Gold Flash over Nickel

Current Rating: 3.0A;
 Withstanding Voltage: 1000V AC/Minute;
 Operation Temperature: -40°C to +105°C;
 Insulation Resistance: 1000MΩ Min;
 Contact Resistance: 20mΩ Max;
 Processing Temperature: 255°C for 5 seconds Max;
 Packing: Tape&Reel

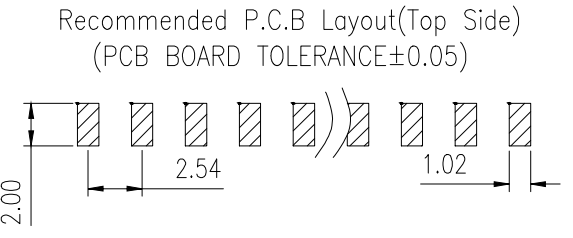

SECTION A-A

RoHS compliant
 Unit:mm

Scale	Free
TOLERANCE	
.X	±0.40
.XX	±0.25
.XXX	±0.15
DIM	TOL
X°	±5°
Angle	TOL

Drawn	21.04.2021	Winnie
Approved	21.04.2021	Winnie
Id.	Modification	Date
		Name

Date: 21.04.2021
 Name: Winnie

Drawn: 21.04.2021
 Name: Winnie

Approved: 21.04.2021
 Name: Winnie

ASSMANN
 WSW components

Description: Female Header	
SMT Pitch 2.54mm 1 Row	
ASSMANN WSW-No. A-BL-254Eaxx-085GSR1	
Drawing-No. ASS 8925 CO	rev00
Customer-No.	SHEET 2 / 2