

1154031

https://www.phoenixcontact.com/us/products/1154031

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Shielded SMD female connector, nominal current: 1.7 A, Test voltage: 500 V AC, number of positions: 12, pitch: 0.8 mm, color: black, contact surface: Gold, contact connection type: Socket, mounting: SMD soldering

Your advantages

- · Gold-plated contacts ensure transfer quality remains stable over the long term
- · Reliable mechanical and electrical connections, thanks to the double-sided ScaleX contact system
- · Robustness: ScaleX technology for high tolerance compensation and protection of contacts
- · Flexible device design: various numbers of positions, designs, and stack heights with high wipe lengths

Commercial data

Item number	1154031
Packing unit	250 pc
Minimum order quantity	250 pc
Sales key	AA23
Product key	AAWDDD
GTIN	4063151154653
Weight per piece (including packing)	3.6 g
Weight per piece (excluding packing)	3.6 g
Customs tariff number	85366930
Country of origin	CZ



1154031

https://www.phoenixcontact.com/us/products/1154031

Technical data

Product properties

Product type	Shielded SMD female connector
Product family	FP 0,8/FV-SH 10,85
Number of positions	12
Pitch	0.8 mm
Number of rows	2
Number of potentials	12
Pin layout	Linear pad geometry
Electrical characteristic	shielded

Electrical properties

Nominal current I _N	1.7 A IEC 60512-5-2:2002-02 (at 20°C 80-pos.)
Degree of pollution	3
Contact resistance	25 mΩ
Test voltage	500 V AC IEC 60512-4-1:2003
Electrical characteristic	shielded

Mounting

	Mounting type	SMD soldering
Pin layout Linear pad geometry	Pin layout	Linear pad geometry

Processing notes

Process	Reflow soldering
Moisture Sensitive Level	MSL 1

Material specifications

Material data - contact

Note	WEEE/RoHS-compliant, free of whiskers according to IEC 60068-2-82/JEDEC JESD 201
Contact material	Cu alloy
Surface characteristics	Selective coating
Metal surface contact area (top layer)	Gold (Au)
Metal surface contact area (middle layer)	Nickel (Ni)
Metal surface soldering area (top layer)	Tin (Sn)
Metal surface soldering area (middle layer)	Nickel (Ni)

Material data - housing

Color (Housing)	black (9005)
Insulating material	LCP
Insulating material group	IIIb
CTI according to IEC 60112	150
Flammability rating according to UL 94	V0



1154031

https://www.phoenixcontact.com/us/products/1154031

Notes

Notes on operation	The permissible voltage during operation depends on the application, taking into consideration the air clearances and creepage distances within the scope of insulation requirements in accordance with IEC 60664-1.
Details for soldering processes	The items are suitable for assembly on both sides and for overhead soldering.

Dimensions

Dimensional drawing	h Ph
Pitch	0.8 mm
Width [w]	6.9 mm
Height [h]	11.45 mm
Length [I]	7.1 mm
Installed height	10.85 mm

Application

Contact cover	0.8 mm
Center offset	± 0.7 mm in longitudinal and transverse direction
Stack height	12 mm Tolerance: +1,5 mm (in combination with Range of articles:FP 0,8/MV-SH 1,15)
	13.5 mm Tolerance: +1,5 mm (in combination with Range of articles:FP 0,8/MV-SH 2,65)
	18 mm Tolerance: +1,5 mm (in combination with Range of articles:FP 0,8/MV-SH 7,15)
	19.5 mm Tolerance: +1,5 mm (in combination with Range of articles:FP 0,8/MV-SH 8,65)
Wipe length	1.5 mm
Angular tolerance	± 5 ° in longitudinal and transverse direction (when plugging in)
	± 5 ° in longitudinal and transverse direction (when plugged in)
Axial offset in X direction (longitudinal)	± 0.3 mm (Tolerance compensation when plugged in)
Axial offset in Y direction (transversal)	± 0.3 mm (Tolerance compensation when plugged in)

PCB design

Pad geometry	0.5 x 1.1 mm
Pad geometry	0.5 X 1.1 mm

Electrical tests

Thermal test | Test group C

Specification	IEC 60512-5-2:2002-02
Tested number of positions	80



1154031

https://www.phoenixcontact.com/us/products/1154031

Specification	IEC 60512-3-1:2002-02
Insulation resistance, neighboring positions	≥ 5 GΩ
Air clearances and creepage distances	
Air clearances and creepage distances	
Air clearances and creepage distances Insulating material group	IIIb

Environmental and real-life conditions

Vibration test

Specification	IEC 60068-2-6:2007-12
Frequency	10 - 2000 - 10 Hz
Sweep speed	1 octave/min
Amplitude	1.5 mm (10 Hz 58 Hz)
Acceleration	200 m/s² (58 Hz 2000 Hz)
Test duration per axis	2.5 h

Durability test

Specification	IEC 60512-9-1:2010-03 (following)
Contact resistance R ₁	25 mΩ
Contact resistance R ₂	25 mΩ
Insertion/withdrawal cycles	500
Insulation resistance, neighboring positions	≥ 5 GΩ

Shocks

Specification	IEC 60068-2-27:2008-02
Pulse shape	Semi-sinusoidal
Acceleration	490 m/s²
Shock duration	11 ms
Test directions	X-, Y- and Z-axis (pos. and neg.)

Ambient conditions

Ambient temperature (operation)	-55 °C 125 °C
Ambient temperature (storage/transport)	-40 °C 70 °C
Relative humidity (storage/transport)	30 % 70 %
Ambient temperature (assembly)	-5 °C 100 °C

Packaging specifications

Dimensional drawing	TW A
Type of packaging	24 mm wide tape
[W] tape width	24 mm
[W2] coil overall dimension	330 mm



1154031

https://www.phoenixcontact.com/us/products/1154031


[A] coil diameter	30.4 mm
Outer packaging type	Transparent-Bag
ESD level	(D) electrostatically conductive
Specification	DIN EN 61340-5-1 (VDE 0300-5-1): 2008-07



1154031

https://www.phoenixcontact.com/us/products/1154031

Drawings

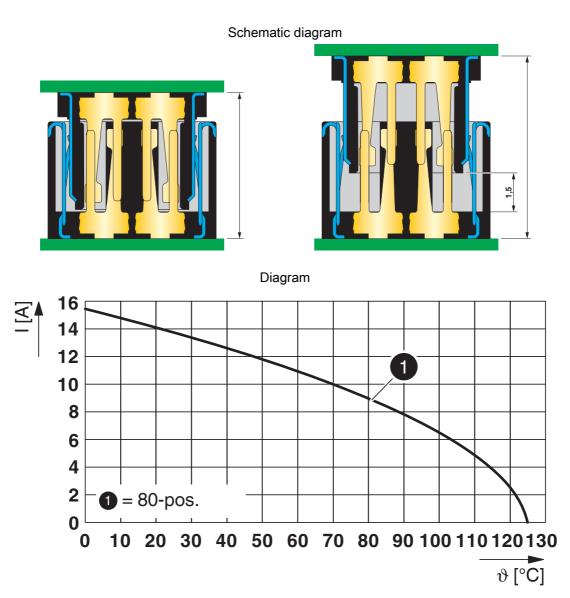


Type: FP 0,8/...-MV-SH 8,65 with FP 0,8/...-FV-SH 10,85 - shroud




1154031

https://www.phoenixcontact.com/us/products/1154031

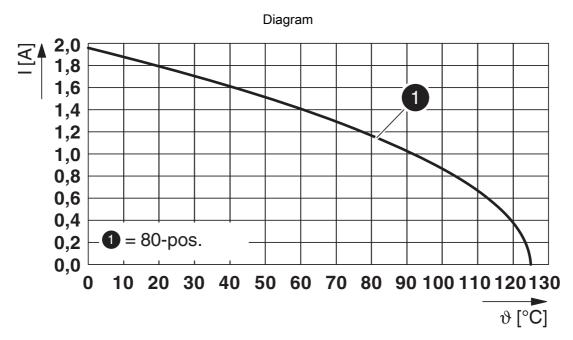

Type: FP 0,8/...-MV-SH 1,15 with FP 0,8/...-FV-SH 10,85 - contacts

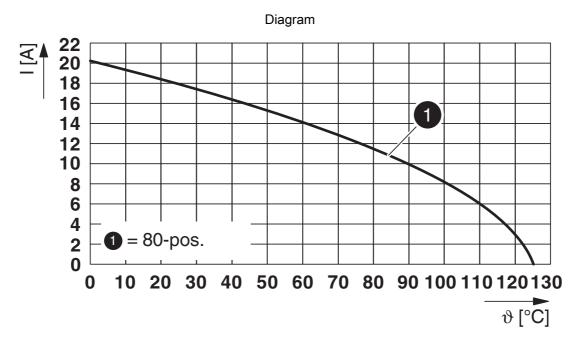


Type: FP 0,8/...-MV-SH 1,15 with FP 0,8/...-FV-SH 10,85 - shroud



1154031

https://www.phoenixcontact.com/us/products/1154031

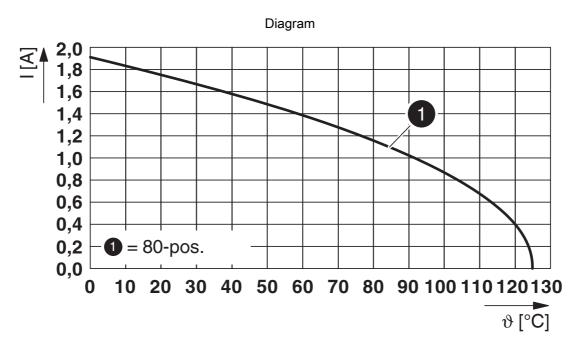

Type: FP 0,8/...-MV-SH 8,65 with FP 0,8/...-FV-SH 10,85 - contacts



1154031

https://www.phoenixcontact.com/us/products/1154031

Approvals

🌣 To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1154031



cULus Recognized

Approval ID: E118976-20190703



1154031

https://www.phoenixcontact.com/us/products/1154031

Classifications

UNSPSC 21.0

ECLASS

	ECLASS-11.0	27460201
	ECLASS-12.0	27460201
	ECLASS-13.0	27460201
ETIM		
	ETIM 9.0	EC002637
UN	SPSC	

39121409



1154031

https://www.phoenixcontact.com/us/products/1154031

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%



1154031

https://www.phoenixcontact.com/us/products/1154031

Mandatory accessories

FP 0,8/12-MH-SH - SMD male connector, shielded

1043791

https://www.phoenixcontact.com/us/products/1043791



shielded SMD male connector, nominal current: 1.7 A, Test voltage: 500 V AC, number of positions: 12, pitch: 0.8 mm, color: black, contact surface: Gold, contact connection type: Pin, mounting: SMD soldering

FP 0,8/12-MV-SH 1,15 - SMD male connector, shielded

1043786

https://www.phoenixcontact.com/us/products/1043786



shielded SMD male connector, nominal current: 1.7 A, Test voltage: 500 V AC, number of positions: 12, pitch: 0.8 mm, color: black, contact surface: Gold, contact connection type: Pin, mounting: SMD soldering



1154031

https://www.phoenixcontact.com/us/products/1154031

FP 0,8/12-MV-SH 2,65 - SMD male connector, shielded

1043731

https://www.phoenixcontact.com/us/products/1043731



shielded SMD male connector, nominal current: 1.7 A, Test voltage: 500 V AC, number of positions: 12, pitch: 0.8 mm, color: black, contact surface: Gold, contact connection type: Pin, mounting: SMD soldering

FP 0,8/12-MV-SH 7,15 - SMD male connector, shielded

1154004

https://www.phoenixcontact.com/us/products/1154004



shielded SMD male connector, nominal current: 1.7 A, Test voltage: 500 V AC, number of positions: 12, pitch: 0.8 mm, color: black, contact surface: Gold, contact connection type: Pin, mounting: SMD soldering



1154031

https://www.phoenixcontact.com/us/products/1154031

FP 0,8/12-MV-SH 8,65 - SMD male connector, shielded

1154119

https://www.phoenixcontact.com/us/products/1154119



shielded SMD male connector, nominal current: 1.7 A, Test voltage: 500 V AC, number of positions: 12, pitch: 0.8 mm, color: black, contact surface: Gold, contact connection type: Pin, mounting: SMD soldering

Accessories

FP 0,8/12-MV-SH 1,15 - SMD male connector, shielded

1043786

https://www.phoenixcontact.com/us/products/1043786



shielded SMD male connector, nominal current: 1.7 A, Test voltage: 500 V AC, number of positions: 12, pitch: 0.8 mm, color: black, contact surface: Gold, contact connection type: Pin, mounting: SMD soldering



1154031

https://www.phoenixcontact.com/us/products/1154031

FP 0,8/12-MV-SH 8,65 - SMD male connector, shielded

1154119

https://www.phoenixcontact.com/us/products/1154119



shielded SMD male connector, nominal current: 1.7 A, Test voltage: 500 V AC, number of positions: 12, pitch: 0.8 mm, color: black, contact surface: Gold, contact connection type: Pin, mounting: SMD soldering

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com