


# THROUGH-HOLE MICRO SOCKETS

(1.27 mm) .050" PITCH • SLM/SMS SERIES

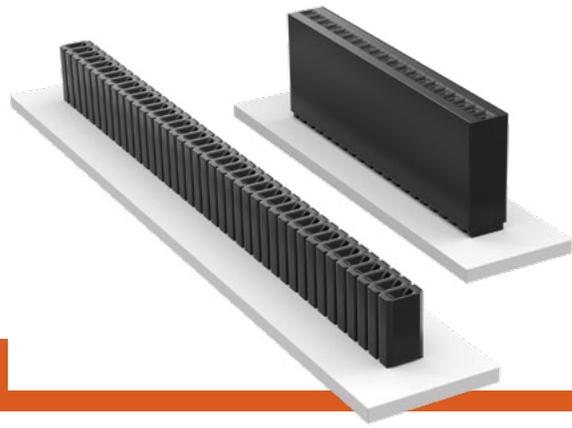

## SLM

**Mates:**  
HTMS, TMS, MTMS, DWM,  
HDWM, FTR, HMTMS

## SMS

**Mates:**  
HTMS, TMS, MTMS,  
DWM, HDWM, FTR, TML,  
ZML, HMTM

### SPECIFICATIONS

**Insulator Material:**  
SLM: Black Glass Filled Polyester  
SMS: Black LCP

**Contact Material:**  
Phosphor Bronze

**Plating:**  
Au or Sn over  
50 μ" (1.27 μm) Ni

**Current Rating (SLM/TMS):**  
5.2 A per pin  
(2 pins powered)

**Current Rating (SMS/TMS):**  
5.0 A per pin  
(2 pins powered)

**Operating Temp Range:**  
-55 °C to +125 °C with Gold  
-55 °C to +105 °C with Tin

**Insertion Depth:**  
SLM: (2.03 mm) .080"  
to (3.05 mm) .120"  
SMS: (3.43 mm) .135" to  
(6.35 mm) .250" with  
(0.38 mm) .015" wipe

### PROCESSING

**Lead-Free Solderable:**  
SLM: No, Lead Wave Only  
SMS: Yes

### ALSO AVAILABLE

Other Platings  
(MOQ Required)

**Note:**  
Some lengths, styles and  
options are non-standard,  
non-returnable.

|     |   |   |                  |   |    |                |   |            |
|-----|---|---|------------------|---|----|----------------|---|------------|
| SLM | - | 1 | NO. PINS PER ROW | - | 01 | PLATING OPTION | - | ROW OPTION |
|-----|---|---|------------------|---|----|----------------|---|------------|





01 thru 50

**-L**  
= 10 μ" (0.25 μm) Gold on contact,  
Matte Tin on tail

**-G**  
= 20 μ" (0.51 μm) Gold on contact,  
Gold flash on balance

**-S**  
= Single Row

**-D**  
= Double Row

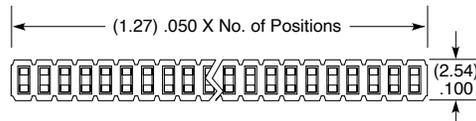

|     |   |   |                  |   |            |                |   |            |
|-----|---|---|------------------|---|------------|----------------|---|------------|
| SMS | - | 1 | NO. PINS PER ROW | - | LEAD STYLE | PLATING OPTION | - | ROW OPTION |
|-----|---|---|------------------|---|------------|----------------|---|------------|

01 thru 50





Specify  
LEAD  
STYLE  
from  
chart

**-L**  
= 10 μ" (0.25 μm) Gold on contact,  
Matte Tin on tail

**-G**  
= 20 μ" (0.51 μm) Gold on contact,  
Gold flash on balance

**-S**  
= Single Row

**-D**  
= Double Row



| LEAD STYLE | A           |
|------------|-------------|
| -01        | (2.54) .100 |
| -02        | (4.83) .190 |