



XL-25W/XL-25D Series Ceramic Heat Spreader

Features

- Best for limited space
- Low thermal expansion coefficient
- Reliable insulation performance
- Low thermal expansion coefficient
- Non-toxic and durable for high temperature
- Durable for thermal shock

Application:

Adative to dramatic environmental changes

Electronic Components - 5G, Aerospace, AI, AIoT, AR/VR/MR/XR, Automotive, Consumer Devices, Datacom, Electric Vehicle, Electronic Products, Energy Storage, Industrial, Lighting Equipment, Medical, Military, Netcom, Panel, Power Electronics, Robot, Servers, Smart Home, Telecom, etc.

Standard Sizes (mm):

- | | | |
|------------------------|------------------------|-----------------------|
| 01. TO-220 20x14x0.635 | 04. TO-247 22x17x0.635 | 07. TO-264 28x22x1.0 |
| 02. TO-220 20x14x1.0 | 05. TO-247 22x17x1.0 | 08. TO-3P 25x20x0.635 |
| 03. TO-220 12x18.5x1.0 | 06. TO-264 28x22x0.635 | 09. TO-3P 25x20x1.0 |

Properties

Properties	Unit	XL-25W	XL-25D	Test Method
Thermal Conductivity	W/m·K	25	190~210	-
Color	-	White	Dark Gray	-
Dielectric Breakdown Voltage	KV/mm	≥15	≥18.45	ASTM D149
Bulk Density	g/cm ³	≥3.8	3.32	CNS 619
Volume Resistance	Ohm-m	10 ¹²	1.4×10 ¹³	-
Flexural Strength	kgf/cm ²	4078.8	3416	CNS 12701
Linear Thermal Expansion Coefficient	10 ⁻⁶	6.6~8	2.805	RT~300° C
Main Composition	-	Al ₂ O ₃	AlN	-


T-Global Technology (Europe & North America) Ltd.

Units 1-2 Cosford Business Park, Central Park, Lutterworth, Leicestershire, LE17 4QU, United Kingdom
T +44 (0)1455 553 510 **E** sales@tglobaltechnology.com **W** www.tglobaltechnology.com

Version19
20230721



NOTICE: The information contained herein is to the best of our knowledge true and accurate. Values stated in this technical data sheet represent typical values as not all tests are run on each lot of material produced. All specifications are subject to change without notice. The protective film and release paper does not affect the function of the product. If there is no special requirement, the default depends on T-Global. Since the varied conditions of potential use are beyond our control, all recommendations or suggestions are presented without guarantee or responsibility on our part and users should make their own test to determine the suitability of our products in any specific situation. This product is sold without warranty either expressed or implied, of fitness for a particular purpose or otherwise, except that this product shall be of standard quality, and except to the extent otherwise stated in T-Global Technology's invoice, quotation, or order acknowledgment. We disclaim any and all liabilities incurred in connection with the use of information contained herein, or otherwise. All risks of such are assumed by the user. Furthermore, nothing contained herein shall be construed as a recommendation to use any process or to manufacture or to use any product in conflict with existing or future patents covering any product or material or its use.

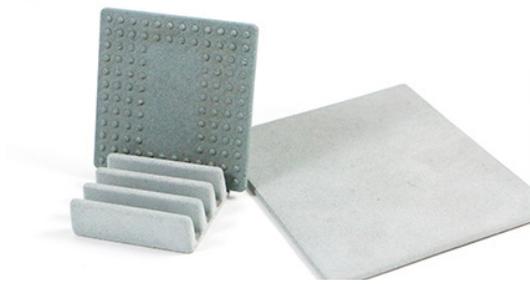

XL-25 Ceramic Heat Spreader

REACH Compliant RoHS Compliant

Features

- Open-porous structure for more air-contact area
- Best for limited space
- High breakdown voltage & high surface impedance
- Low thermal expansion coefficient
- EMI suppression
- Durable for thermal shock

Application:

Can adapt to dramatic environmental changes

Electronic Components - 5G, Aerospace, AI, AIoT, AR/VR/MR/XR, Automotive, Consumer Devices, Datacom, Electric Vehicle, Electronic Products, Energy Storage, Industrial, Lighting Equipment, Medical, Military, Netcom, Panel, Power Electronics, Robot, Servers, Smart Home, Telecom, etc.


Standard Sizes (mm):

- | | | |
|---------------------|---------------------|-------------------------|
| 01. 10x10x2.0(flat) | 07. 22x22x2.5(flat) | 13. 40x40x3.0(embossed) |
| 02. 15x15x2.5(flat) | 08. 30x30x2.0(flat) | 14. 40x40x5.0(fin) |
| 03. 15x15x5.0(fin) | 09. 30x30x2.5(flat) | 15. 40x40x10.0(fin) |
| 04. 20x15x2.0(flat) | 10. 30x30x5.0(fin) | 16. 50x50x3.0(embossed) |
| 05. 20x20x2.0(flat) | 11. 35x35x10.0(fin) | 17. 50x50x5.0(fin) |
| 06. 20x20x2.5(flat) | 12. 40x40x2.5(flat) | 18. 50x50x10.0(fin) |

Mechanism

Aca ≅ 5 x Aal

The air-contact area of ceramic heat spreader is nearly 5 times of aluminum heat sink, under the same volume. In the same condition of air flow rate, ceramic heat spreaders can perform better. The more contact areas, the more heat can be exchanged by the cooler air.

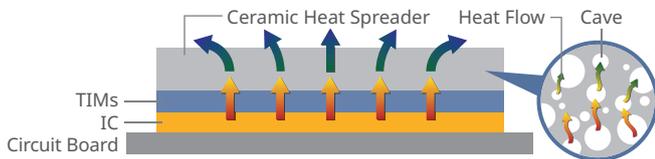

$$Q_t \propto S \times A$$

Qt: The heat would be taken by air flow.

S: Air flow(m/s) A: Air contact area (m²)

Aca: Air contact (m²) of ceramic heat sink

Aal: Air contact (m²) of aluminium heat sink

Properties

Properties	Unit	XL-25	Tolerance	Test Method
Thermal Conductivity	W/m•K	10	±0.67	-
Color	-	Gray/Green	-	-
Dielectric Breakdown Voltage	KV/mm	≥0.5	-	ASTM D149
Bulk Density	g/cm ³	1.89	±0.18	CNS 619
Flexural Strength	kgf/cm ²	47.5	-	CNS 12701
Porosity	%	25	-	CNS 619
Water Absorption	%	16	-	CNS 619
Operating Temperature	° C	<500	-	-
Linear Temperature Expansion Coefficient	10 ⁻⁶	4.13	-	RT~300° C
Main Composition	-	SiC/Al ₂ O ₃ /SiO ₂	-	-
Hardness	Moh's	5~6	±0.6	DIN En101-1992

※For special sizes, please contact us.

T-Global Technology (Europe & North America) Ltd.

Units 1-2 Cosford Business Park, Central Park, Lutterworth, Leicestershire, LE17 4QU, United Kingdom
 T +44 (0)1455 553 510 E sales@tglobaltechnology.com W www.tglobaltechnology.com

Version19
20230721



NOTICE: The information contained herein is to the best of our knowledge true and accurate. Values stated in this technical data sheet represent typical values as not all tests are run on each lot of material produced. All specifications are subject to change without notice. The protective film and release paper does not affect the function of the product. If there is no special requirement, the default depends on T-Global. Since the varied conditions of potential use are beyond our control, all recommendations or suggestions are presented without guarantee or responsibility on our part and users should make their own test to determine the suitability of our products in any specific situation. This product is sold without warranty either expressed or implied, of fitness for a particular purpose or otherwise, except that this product shall be of standard quality, and except to the extent otherwise stated in T-Global Technology's invoice, quotation, or order acknowledgment. We disclaim any and all liabilities incurred in connection with the use of information contained herein, or otherwise. All risks of such are assumed by the user. Furthermore, nothing contained herein shall be construed as a recommendation to use any process or to manufacture or to use any product in conflict with existing or future patents covering any product or material or its use.