

Han-Snap Carrier, Modular, pivoting

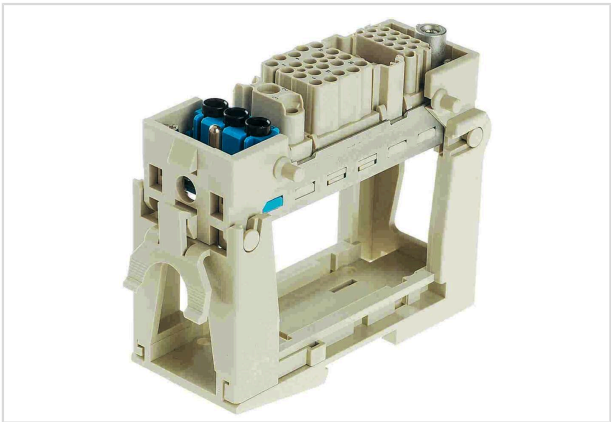


Image is for illustration purposes only. Please refer to product description.

| | |
|--------------------|---|
| Part number | 09 33 000 9803 |
| Specification | Han-Snap Carrier, Modular, pivoting |
| HARTING eCatalogue | https://b2b.harting.com/09330009803 |

Identification

| | |
|------------------------------|--|
| Category | Accessories |
| Series | Han-Snap® |
| Type of accessory | Insert mounting |
| Description of the accessory | Swinging for Han-Modular® hinged frames |

Technical characteristics

| | |
|----------------------|-----------------|
| Tightening torque | 0.8 Nm |
| Limiting temperature | -40 ... +125 °C |
| Retention force | ≥450 N On rail |

Material properties

| | |
|---|---|
| Material (accessories) | Polycarbonate (PC) |
| Colour (accessories) | RAL 7032 (pebble grey) |
| Material flammability class acc. to UL 94 | V-0 |
| RoHS | compliant |
| ELV status | compliant |
| China RoHS | e |
| REACH Annex XVII substances | Not contained |
| REACH ANNEX XIV substances | Not contained |
| REACH SVHC substances | Yes |
| REACH SVHC substances | Potassium 1,1,2,2,3,3,4,4,4-nonafluorobutane-1-sulphonate |
| California Proposition 65 substances | Yes |



Pushing Performance
Since 1945

Material properties

| | |
|-------------------------------------|----------------------|
| Fire protection on railway vehicles | EN 45545-2 (2020-08) |
| Requirement set with Hazard Levels | R22 (HL 1-3) |
| | R23 (HL 1-3) |

Specifications and approvals

| | |
|----------------|--------------------------------------|
| Specifications | IEC 60068-2-6 Vibration (sinusoidal) |
| | IEC 60068-2-27 Shock |

Commercial data

| | |
|--------------------------------|---|
| Packaging size | 1 |
| Net weight | 60 g |
| Country of origin | Germany |
| European customs tariff number | 85389099 |
| GTIN | 5713140050334 |
| ETIM | EC002310 |
| eCl@ss | 27440210 Fixing element for industrial connectors |