

Han 3A-PFT-SL-M20

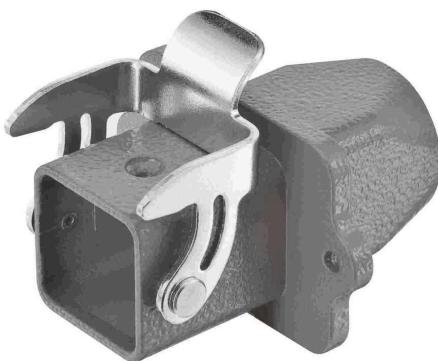


Image is for illustration purposes only. Please refer to product description.

Identification

| | |
|--------------------------|----------------------------|
| Category | Hoods/Housings |
| Series of hoods/housings | Han A® |
| Type of hood/housing | Panel feed through housing |

Version

| | |
|----------------------|---|
| Size | 3 A |
| Version | Top entry |
| Cable entry | 1x M20 |
| Locking type | Single locking lever |
| Field of application | Standard Hoods/housings for industrial applications |
| Pack contents | Please order seal screw separately. |

Technical characteristics

| | |
|--|--|
| Limiting temperature | -40 ... +125 °C |
| Note on the limiting temperature | For use as a connector according to IEC 61984. |
| Degree of protection acc. to IEC 60529 | IP44 IP65 With seal screw IP67 With seal screw |
| Type rating acc. to UL 50 / UL 50E | 12 |

Material properties

| | |
|-------------------------|----------------------|
| Material (hood/housing) | Zinc die-cast |
| Surface (hood/housing) | Powder-coated |
| Colour (hood/housing) | RAL 7037 (dust grey) |

Material properties

| | |
|--------------------------------------|---|
| Material (seal) | NBR |
| Material (locking) | Steel |
| Surface (locking) | Zinc plated |
| RoHS | compliant with exemption |
| RoHS exemptions | 6(a) / 6(a)-I: Lead as an alloying element in steel for machining purposes and in galvanised steel containing up to 0,35 % lead by weight / Lead as an alloying element in steel for machining purposes containing up to 0,35 % lead by weight and in batch hot dip galvanised steel components containing up to 0,2 % lead by weight |
| ELV status | compliant with exemption |
| China RoHS | 50 |
| REACH Annex XVII substances | Not contained |
| REACH ANNEX XIV substances | Not contained |
| REACH SVHC substances | Yes |
| REACH SVHC substances | Lead |
| California Proposition 65 substances | Yes |
| California Proposition 65 substances | Lead Nickel Naphthalene |
| Fire protection on railway vehicles | EN 45545-2 (2020-08) |
| Requirement set with Hazard Levels | R1 (HL 1-3) R7 (HL 1-3) |

Specifications and approvals

| | |
|-----------|-----------------------|
| UL / CSA | UL 1977 ECBT2.E235076 |
| Approvals | CE DNV GL |

Commercial data

| | |
|--------------------------------|--|
| Packaging size | 10 |
| Net weight | 80 g |
| Country of origin | Germany |
| European customs tariff number | 85389099 |
| GTIN | 5713140124509 |
| ETIM | EC000437 |
| eCl@ss | 27440202 Shell for industrial connectors |