

1420047

<https://www.phoenixcontact.com/us/products/1420047>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sleeve housing B24, with double locking latch, material: Die-cast aluminum, salt water resistant, variable, height: 76 mm, cable gland: none, Standard, Without thread opening for screw connection

Product description

Sleeve housing, without screw thread

Your advantages

- Good shielding in the event of electromagnetic interference

Commercial data

Item number	1420047
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF56
Product key	BF7APB
Catalog page	Page 642 (C-2-2019)
GTIN	4055626201436
Weight per piece (including packing)	318.8 g
Weight per piece (excluding packing)	318.8 g
Customs tariff number	85389099
Country of origin	CN

# HC-STA-B24-HHWD-BLANK-EL-AL - Housing



1420047

<https://www.phoenixcontact.com/us/products/1420047>

## Technical data


### Notes

General	for contact inserts HC-B24, BB46, D64, DD108, HV10/16, M
General	also available as a powder-coated or color version: 1373247 HC-STA-B24-HHWD-BLANK-EL/...

### Product properties

Product type	Housing with locking latch
Housing type	Sleeve housing
Application	Standard
Type	B24
Cable outlet	variable
Pg screw connection	none

### Dimensions

Dimensional drawing	
Width	44 mm
Height	76 mm
Length	120 mm

### Material specifications

Flammability rating according to UL 94	V0 (Interlock)
Housing material	Die-cast aluminum, salt water resistant
Housing surface material	uncoated
Locking latch material	PA
Impact strength	IK09

### Mechanical properties

#### Mechanical data

Locking type	Latch
--------------	-------

### Environmental and real-life conditions

#### Ambient conditions

Degree of protection	IP66
	IP67
Enclosure rating (NEMA)	4 (UL 50e)
	4X (UL 50e)
	12 (UL 50e)

# HC-STA-B24-HHWD-BLANK-EL-AL - Housing



1420047

<https://www.phoenixcontact.com/us/products/1420047>

Impact strength	IK09
Ambient temperature (operation)	-40 °C ... 125 °C

# HC-STA-B24-HHWD-BLANK-EL-AL - Housing



1420047

<https://www.phoenixcontact.com/us/products/1420047>



## Drawings

Dimensional drawing

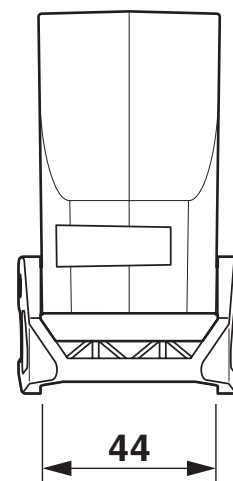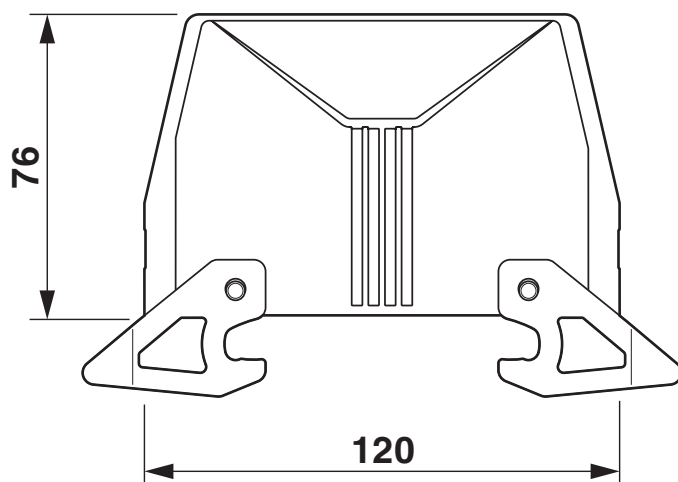

Dimensional drawing

# HC-STA-B24-HHWD-BLANK-EL-AL - Housing



1420047

<https://www.phoenixcontact.com/us/products/1420047>

## Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1420047>

### DNV

Approval ID: TAE000037S



### EAC

Approval ID: RU C-DE.AI30.B.01102



### EAC

Approval ID: RU C-DE.BL08.B.00511

# HC-STA-B24-HHWD-BLANK-EL-AL - Housing



1420047

<https://www.phoenixcontact.com/us/products/1420047>

## Classifications

### ECLASS

ECLASS-11.0	27440202
ECLASS-12.0	27440202
ECLASS-13.0	27440202

### ETIM

ETIM 9.0	EC000437
----------	----------

### UNSPSC

UNSPSC 21.0	31261500
-------------	----------

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

# HC-STA-B24-HHWD-BLANK-EL-AL - Housing



1420047

<https://www.phoenixcontact.com/us/products/1420047>

## Accessories

### US-EMLP (20X9) CUS - Plastic label

0830085

<https://www.phoenixcontact.com/us/products/0830085>

Plastic label, can be ordered: by card, white, labeled according to customer specifications, mounting type: adhesive, lettering field size: 20 x 9 mm, Number of individual labels: 75



---

### HC-B24-HCFD-PR-BK - Protective cover

1346551

<https://www.phoenixcontact.com/us/products/1346551>

Protective cover B24, for double locking latch, protective cover material: PC, height: 26.3 mm, seal: yes





# HC-STA-B24-HHWD-BLANK-EL-AL - Housing

1420047

<https://www.phoenixcontact.com/us/products/1420047>



## US-EMLP-HA (20X9) - Plastic label

0830989

<https://www.phoenixcontact.com/us/products/0830989>



Plastic label, Card, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: adhesive, lettering field size: 20 x 9 mm, Number of individual labels: 70

---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)