

1420910  
<https://www.phoenixcontact.com/us/products/1420910>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sleeve housing B10, with screw locking, material: Die-cast aluminum, salt water resistant, cable outlets: 1, lateral, 1x M20, height: 74 mm, cable gland: none, increased environmental requirements

Commercial data

Item number	1420910
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF58
Product key	BF7API
Catalog page	Page 603 (C-2-2019)
GTIN	4055626249094
Weight per piece (including packing)	239.3 g
Weight per piece (excluding packing)	22.22 g
Customs tariff number	85389099
Country of origin	CN

# HC-ADV-B10-HLWH-1STM20-MF-BK - Housing



1420910

<https://www.phoenixcontact.com/us/products/1420910>

## Technical data

### Notes

General	For contact inserts HC-B10, BB18, DD42, M, K8/24
---------	--


### Product properties

Product type	Housing with screw locking
Product family	HC-ADV
Application	increased environmental requirements
Type	B10
No. of cable outlets	1
Type of the screw connection	1x M20
Fixing screws	M6 (screw head: 5 mm Allen screw)
Housing type	Sleeve housing
Shielded	no
Cable outlet	lateral
Pg screw connection	none

### Connection data

Tightening torque	3 Nm ... 5 Nm (for M6 mounting screws on the sleeve housing)
-------------------	--

### Dimensions

Dimensional drawing	
Width	57 mm
Height	74 mm
Length	105 mm

### Installation dimensions

Width of the assembly cutout	35 mm
Length of the assembly cutout	65 mm

### Material specifications

Seal material	Viton
Housing material	Die-cast aluminum, salt water resistant
Housing surface material	Powder-coated, black
Locking latch material	Stainless steel
Impact strength	IK09

### Environmental and real-life conditions

#### Ambient conditions

# HC-ADV-B10-HLWH-1STM20-MF-BK - Housing



1420910

<https://www.phoenixcontact.com/us/products/1420910>

Degree of protection	IP66
	IP68 (0.2 bar/24 h)
	IP69 (ISO 20653:2013-02)
Enclosure rating (NEMA)	4 (UL 50e)
	4X (UL 50e)
	12 (UL 50e)
Impact strength	IK09
Ambient temperature (operation)	-40 °C ... 125 °C

## Mechanical properties

### Mechanical data


Type of the screw connection	1x M20
Locking type	Screw

## Mounting


Fixing screws	M6 (screw head: 5 mm Allen screw)
---------------	-----------------------------------

## Drawings

Dimensional drawing

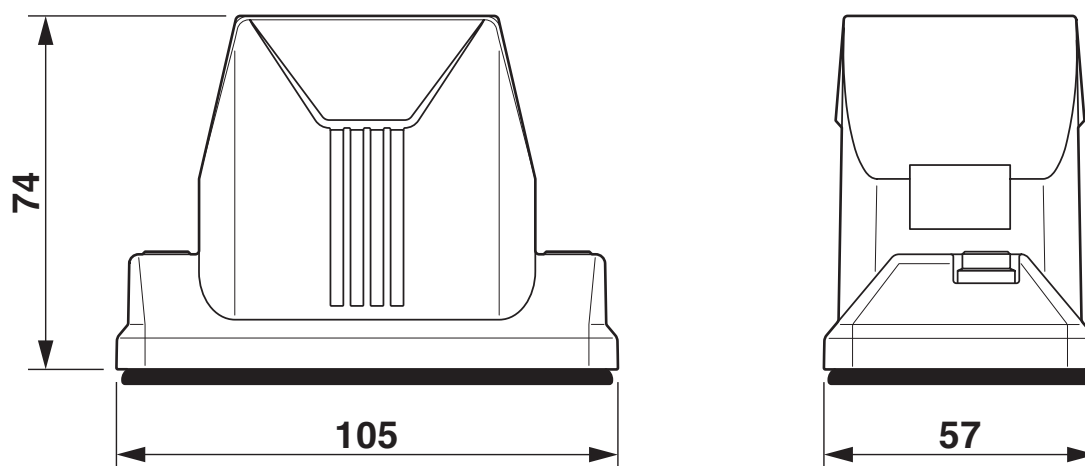

Dimensional drawing

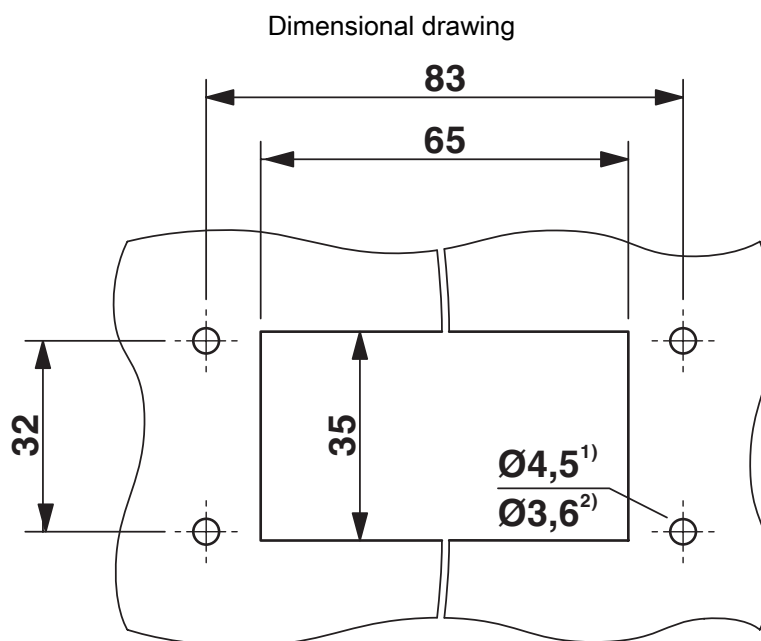

### Mounting cutout

1) when M4 screws are used

2) when self-tapping Torx® screws are used (Torx® 20, M4)

1420910

<https://www.phoenixcontact.com/us/products/1420910>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1420910>

**DNV**  
Approval ID: TAE000037S

**cUL Recognized**  
Approval ID: E255026

**UL Recognized**  
Approval ID: E255026

**EAC**  
Approval ID: RU C-DE.AI30.B.01102

**EAC**  
Approval ID: RU C-DE.BL08.B.00511

**cULus Recognized**

# HC-ADV-B10-HLWH-1STM20-MF-BK - Housing



1420910

<https://www.phoenixcontact.com/us/products/1420910>

## Classifications

### ECLASS

ECLASS-11.0	27440202
ECLASS-12.0	27440202
ECLASS-13.0	27440202

### ETIM

ETIM 9.0	EC000437
----------	----------

### UNSPSC

UNSPSC 21.0	31261500
-------------	----------

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

# HC-ADV-B10-HLWH-1STM20-MF-BK - Housing



1420910

<https://www.phoenixcontact.com/us/products/1420910>

## Accessories

### HC-B-AF - Panel-mount flange

1686533

<https://www.phoenixcontact.com/us/products/1686533>

Panel-mount flange for HEAVYCON ADVANCE housing




---

### HC-B-AF-SET - Panel-mount flange

1604638

<https://www.phoenixcontact.com/us/products/1604638>

Panel-mount flange for HEAVYCON ADVANCE housing, set consisting of:  
2 panel-mount flanges with 4 self-tapping screws (M4, Torx<sup>®</sup>) and 4 fan-type washers





# HC-ADV-B10-HLWH-1STM20-MF-BK - Housing



1420910

<https://www.phoenixcontact.com/us/products/1420910>

## HC-B 10-TMS-SD-IP50 - Protective cover

1690749

<https://www.phoenixcontact.com/us/products/1690749>



Protective cover B10, with clip locking, protective cover material: PA, height: 31.2 mm, seal: no, with lanyard

---

## G-INS-M20-S68N-PNES-GY - Cable gland

1411125

<https://www.phoenixcontact.com/us/products/1411125>



Cable gland, material for screw connection: PA, external cable diameter 6 mm ... 12 mm, shielding: no, connecting thread: M20 x 1.5, color: silver-grey RAL 7001

# HC-ADV-B10-HLWH-1STM20-MF-BK - Housing



1420910

<https://www.phoenixcontact.com/us/products/1420910>

## HC-M-KV-M20(11-16) - Cable gland

1645998

<https://www.phoenixcontact.com/us/products/1645998>



Metal screw connection up to 5 bar, thread length: 6 mm, cable diameter: 11 - 16 mm, WAF 27, screw connection: M20

---

## HC-M-KV-M20(1ASI) - Cable gland

1584017

<https://www.phoenixcontact.com/us/products/1584017>



Metal screw connection for an AS-Interface flat-ribbon conductor, thread type M20

## HC-ADV-B10-HLWH-1STM20-MF-BK - Housing

1420910

<https://www.phoenixcontact.com/us/products/1420910>



## G-INS-M20-S68N-NNES-S - Cable gland

1411163

<https://www.phoenixcontact.com/us/products/1411163>



Cable gland, material for screw connection: Brass, nickel-plated, external cable diameter 6 mm ... 12 mm, shielding: no, connecting thread: M20 x 1.5, color: silver, with O-ring

---

## US-EMLP-HA (20X9) - Plastic label

0830989

<https://www.phoenixcontact.com/us/products/0830989>



Plastic label, Card, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: adhesive, lettering field size: 20 x 9 mm, Number of individual labels: 70

## HC-ADV-B10-HLWH-1STM20-MF-BK - Housing

1420910

<https://www.phoenixcontact.com/us/products/1420910>



## US-EMLP-HA (20X9) CUS - Plastic label

0830995

<https://www.phoenixcontact.com/us/products/0830995>

Plastic label, Card, white, labeled, can be labeled with: THERMOMARK CARD, mounting type: adhesive, lettering field size: 20 x 9 mm, Number of individual labels: 70



---

## WP-G HF IP66 M20 BK - Screw connection

3240898

<https://www.phoenixcontact.com/us/products/3240898>

Cable gland, metric thread, IP66 protection, straight



# HC-ADV-B10-HLWH-1STM20-MF-BK - Housing

1420910

<https://www.phoenixcontact.com/us/products/1420910>



## WP-G HF IP69K M20 BK - Screw connection

3240884

<https://www.phoenixcontact.com/us/products/3240884>



Cable gland, metric thread, IP68/69k protection, straight

---

## WP-GA HF IP66 M20 BK - Screw connection

3240926

<https://www.phoenixcontact.com/us/products/3240926>



Cable gland, metric thread, IP66 protection, angled

# HC-ADV-B10-HLWH-1STM20-MF-BK - Housing

1420910

<https://www.phoenixcontact.com/us/products/1420910>



## WP-GA HF IP69K M20 BK - Screw connection

3240912

<https://www.phoenixcontact.com/us/products/3240912>

Cable gland, metric thread, IP68/69k protection, angled



---

## WP-GR HF IP66 M20 BK - Screw connection

3240954

<https://www.phoenixcontact.com/us/products/3240954>

Cable gland, metric thread, IP66 protection, with strain relief



# HC-ADV-B10-HLWH-1STM20-MF-BK - Housing

1420910

<https://www.phoenixcontact.com/us/products/1420910>



## WP-GR HF IP69K M20 BK - Screw connection

3240940

<https://www.phoenixcontact.com/us/products/3240940>



Cable gland, metric thread, IP68/69k protection, with strain relief

---

## WP-G PP HF M20 - Screw connection

3240998

<https://www.phoenixcontact.com/us/products/3240998>



Cable gland made from PP with metric thread, IP65 protection

# HC-ADV-B10-HLWH-1STM20-MF-BK - Housing



1420910

<https://www.phoenixcontact.com/us/products/1420910>

## WP-GT PP HF M20 - Screw connection

3241012

<https://www.phoenixcontact.com/us/products/3241012>



Cable gland made from PP with metric thread, rotatable, IP54 protection

---

## WP-G BRASS IP40 M20 - Screw connection

3241047

<https://www.phoenixcontact.com/us/products/3241047>



Cable gland made from brass with metric thread, IP40 protection



# HC-ADV-B10-HLWH-1STM20-MF-BK - Housing



1420910

<https://www.phoenixcontact.com/us/products/1420910>

## WP-GT BRASS M20 - Screw connection

3241033

<https://www.phoenixcontact.com/us/products/3241033>



Cable gland made from brass with metric thread, rotatable, IP40 protection

---

## WP-G BRASS IP65 M20 - Screw connection

3241061

<https://www.phoenixcontact.com/us/products/3241061>



Cable gland made from brass with metric thread, IP65 protection

# HC-ADV-B10-HLWH-1STM20-MF-BK - Housing



1420910

<https://www.phoenixcontact.com/us/products/1420910>

## SF-BIT-HEXB 5-89 - Screw insert

1208911

<https://www.phoenixcontact.com/us/products/1208911>



Screw bit, hexagonal with ball head, E6.3-1/4" drive, size: Hex 5 x 89 mm, hardened, suitable for holder according to DIN 3126-F 6.3/ISO 1173

---

## SF-M BH - Screwdriver

1212070

<https://www.phoenixcontact.com/us/products/1212070>



Bit screwdriver, with 1/4" quick-action chuck, handle length 119 mm, 2-component handle, with non-slip grip, suitable for bits according to DIN 3126-C 6.3 and E 6.3/ISO 1173, magnetic

---

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)