

1420927  
<https://www.phoenixcontact.com/us/products/1420927>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sleeve housing B24, with screw locking, material: Die-cast aluminum, salt water resistant, cable outlets: 1, straight, 1x M40, height: 93.7 mm, cable gland: none, increased environmental requirements

Commercial data

Item number	1420927
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF58
Product key	BF7API
Catalog page	Page 631 (C-2-2019)
GTIN	4055626249261
Weight per piece (including packing)	395.3 g
Weight per piece (excluding packing)	395.3 g
Customs tariff number	85389099
Country of origin	CN

## Technical data

### Notes

General	for contact inserts HC-B24, BB46, D64, DD108, HV10/16, M
---------	--


### Product properties

Product type	Housing with screw locking
Housing type	Sleeve housing
Product family	HC-ADV
Application	increased environmental requirements
Type	B24
No. of cable outlets	1
Type of the screw connection	1x M40
Fixing screws	M6 (screw head: 5 mm Allen screw)
Shielded	no
Cable outlet	straight
Pg screw connection	none

### Connection data

Tightening torque	3 Nm ... 5 Nm (for M6 mounting screws on the sleeve housing)
-------------------	--

### Dimensions

Dimensional drawing	
Width	57 mm
Height	93.7 mm
Length	152 mm

### Installation dimensions

Width of the assembly cutout	35 mm
Length of the assembly cutout	112 mm

### Material specifications

Seal material	Viton
Housing material	Die-cast aluminum, salt water resistant
Housing surface material	Powder-coated, black
Locking latch material	Stainless steel
Impact strength	IK09

### Environmental and real-life conditions

#### Ambient conditions

1420927

<https://www.phoenixcontact.com/us/products/1420927>

Degree of protection	IP66
	IP68 (0.2 bar/24 h)
	IP69 (ISO 20653:2013-02)
Enclosure rating (NEMA)	4 (UL 50e)
	4X (UL 50e)
	12 (UL 50e)
Impact strength	IK09
Ambient temperature (operation)	-40 °C ... 125 °C

## Mechanical properties

### Mechanical data


Type of the screw connection	1x M40
Locking type	Screw

## Mounting

Assembly instructions	In order to guarantee that the protective conductor contact functions even when plugged in at an angle, the two panel-mount flanges must have sufficient electrical contact with the metal mounting panel.
	Tightening torque of locking screw 3 Nm.
Fixing screws	M6 (screw head: 5 mm Allen screw)

## Drawings

Dimensional drawing

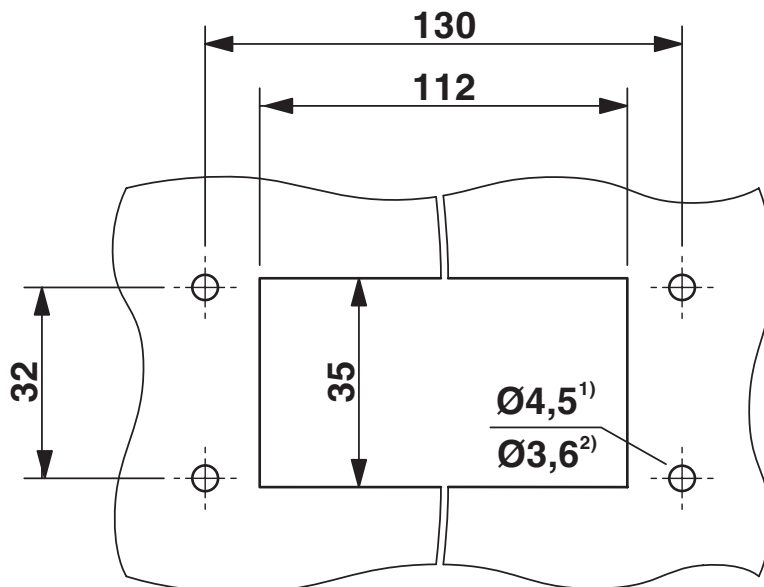


### Mounting cutout

1) when M4 screws are used

2) when self-tapping Torx® screws are used (Torx® 20, M4)

Dimensional drawing

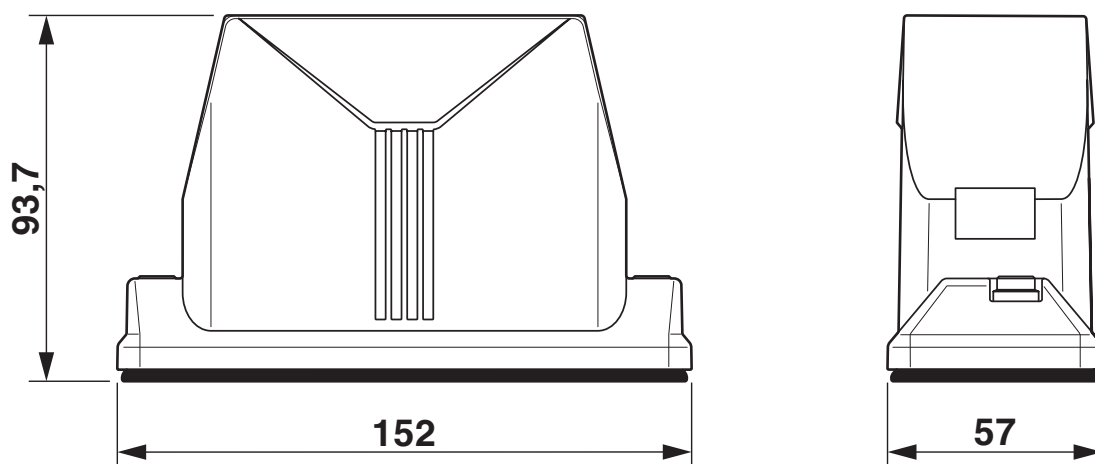

Dimensional drawing

1420927

<https://www.phoenixcontact.com/us/products/1420927>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1420927>

**DNV**  
Approval ID: TAE000037S

**cUL Recognized**  
Approval ID: E255026

**UL Recognized**  
Approval ID: E255026

**EAC**  
Approval ID: RU C-DE.AI30.B.01102

**EAC**  
Approval ID: RU C-DE.BL08.B.00511

**cULus Recognized**

Classifications

ECLASS

ECLASS-11.0	27440202
ECLASS-12.0	27440202
ECLASS-13.0	27440202

ETIM

ETIM 9.0	EC000437
----------	----------

UNSPSC

UNSPSC 21.0	31261500
-------------	----------

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

# HC-ADV-B24-HHWH-1TTM40-MF-BK - Housing

1420927

<https://www.phoenixcontact.com/us/products/1420927>



## Accessories

### HC-B-AF - Panel-mount flange

1686533

<https://www.phoenixcontact.com/us/products/1686533>



Panel-mount flange for HEAVYCON ADVANCE housing

---

### HC-B-AF-SET - Panel-mount flange

1604638

<https://www.phoenixcontact.com/us/products/1604638>



Panel-mount flange for HEAVYCON ADVANCE housing, set consisting of:  
2 panel-mount flanges with 4 self-tapping screws (M4, Torx<sup>®</sup>) and 4 fan-type washers



# HC-ADV-B24-HHWH-1TTM40-MF-BK - Housing

1420927

<https://www.phoenixcontact.com/us/products/1420927>



## HC-B 24-TMS-SD-IP50 - Protective cover

1690765

<https://www.phoenixcontact.com/us/products/1690765>



Protective cover B24, with clip locking, protective cover material: PA, height: 31.2 mm, seal: no, with lanyard

---

## HC-M-KV-M40(27-34) - Cable gland

1607729

<https://www.phoenixcontact.com/us/products/1607729>



Metal screw connection up to 5 bar, thread length: 8 mm, cable diameter: 27 ... 34 mm, WAF 50, screw connection: M40

# HC-ADV-B24-HHWH-1TTM40-MF-BK - Housing

1420927

<https://www.phoenixcontact.com/us/products/1420927>



## G-INSEC-M40-M68N-NCRS-S - Cable gland

1411192

<https://www.phoenixcontact.com/us/products/1411192>



Cable gland, material for screw connection: Brass, nickel-plated, application: EMC, external cable diameter 19 mm ... 27 mm, shielding: yes, connecting thread: M40 x 1.5, color: silver, with O-ring

---

## G-INS-M40-M68N-NNES-S - Cable gland

1411167

<https://www.phoenixcontact.com/us/products/1411167>



Cable gland, material for screw connection: Brass, nickel-plated, application: Standard, external cable diameter 19 mm ... 28 mm, shielding: no, connecting thread: M40 x 1.5, color: silver, with O-ring

# HC-ADV-B24-HHWH-1TTM40-MF-BK - Housing

1420927

<https://www.phoenixcontact.com/us/products/1420927>



## WP-G HF IP66 M40 BK - Screw connection

3240901

<https://www.phoenixcontact.com/us/products/3240901>

Cable gland, metric thread, IP66 protection, straight



---

## WP-G HF IP69K M40 BK - Screw connection

3240887

<https://www.phoenixcontact.com/us/products/3240887>

Cable gland, metric thread, IP68/69k protection, straight



# HC-ADV-B24-HHWH-1TTM40-MF-BK - Housing

1420927

<https://www.phoenixcontact.com/us/products/1420927>



## WP-GA HF IP66 M40 BK - Screw connection

3240929

<https://www.phoenixcontact.com/us/products/3240929>

Cable gland, metric thread, IP66 protection, angled



---

## WP-GA HF IP69K M40 BK - Screw connection

3240915

<https://www.phoenixcontact.com/us/products/3240915>

Cable gland, metric thread, IP68/69k protection, angled



# HC-ADV-B24-HHWH-1TTM40-MF-BK - Housing

1420927

<https://www.phoenixcontact.com/us/products/1420927>



## WP-GR HF IP66 M40 BK - Screw connection

3240957

<https://www.phoenixcontact.com/us/products/3240957>



Cable gland, metric thread, IP66 protection, with strain relief

---

## WP-GR HF IP69K M40 BK - Screw connection

3240943

<https://www.phoenixcontact.com/us/products/3240943>



Cable gland, metric thread, IP68/69k protection, with strain relief

# HC-ADV-B24-HHWH-1TTM40-MF-BK - Housing



1420927

<https://www.phoenixcontact.com/us/products/1420927>

## WP-G PP HF M40 - Screw connection

3241001

<https://www.phoenixcontact.com/us/products/3241001>

Cable gland made from PP with metric thread, IP65 protection



---

## WP-GT PP HF M40 - Screw connection

3241015

<https://www.phoenixcontact.com/us/products/3241015>

Cable gland made from PP with metric thread, rotatable, IP54 protection



# HC-ADV-B24-HHWH-1TTM40-MF-BK - Housing



1420927

<https://www.phoenixcontact.com/us/products/1420927>

## WP-G BRASS IP40 M40 - Screw connection

3241050

<https://www.phoenixcontact.com/us/products/3241050>

Cable gland made from brass with metric thread, IP40 protection



---

## WP-GT BRASS M40 - Screw connection

3241036

<https://www.phoenixcontact.com/us/products/3241036>

Cable gland made from brass with metric thread, rotatable, IP40 protection



# HC-ADV-B24-HHWH-1TTM40-MF-BK - Housing



1420927

<https://www.phoenixcontact.com/us/products/1420927>

## WP-G BRASS IP65 M40 - Screw connection

3241064

<https://www.phoenixcontact.com/us/products/3241064>



Cable gland made from brass with metric thread, IP65 protection

---

## SF-BIT-HEXB 5-89 - Screw insert

1208911

<https://www.phoenixcontact.com/us/products/1208911>



Screw bit, hexagonal with ball head, E6.3-1/4" drive, size: Hex 5 x 89 mm, hardened, suitable for holder according to DIN 3126-F 6.3/ISO 1173



# HC-ADV-B24-HHWH-1TTM40-MF-BK - Housing

1420927

<https://www.phoenixcontact.com/us/products/1420927>



## SF-M BH - Screwdriver

1212070

<https://www.phoenixcontact.com/us/products/1212070>



Bit screwdriver, with 1/4" quick-action chuck, handle length 119 mm, 2-component handle, with non-slip grip, suitable for bits according to DIN 3126-C 6.3 and E 6.3/ISO 1173, magnetic

---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)