

https://www.phoenixcontact.com/us/products/1852943



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sleeve housing, Range of articles: VARIOCON, design: VC2, housing material: Polyamide, color: gray, When using fiber optics, the bending radii of the cable manufacturers must be observed.

### Commercial data

Item number	1852943
Packing unit	5 pc
Minimum order quantity	5 pc
Sales key	AB01
Product key	ABLAAA
Catalog page	Page 35 (C-2-2013)
GTIN	4017918133894
Weight per piece (including packing)	53.86 g
Weight per piece (excluding packing)	53.86 g
Customs tariff number	85389099
Country of origin	PL

1852943

https://www.phoenixcontact.com/us/products/1852943



#### Technical data

#### Notes

General

When using fiber optics, the bending radii of the cable manufacturers must be observed.

Safety note

WARNING: The connectors may not be plugged in or

WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.

- WARNING: Commission properly functioning products only.
   The products must be regularly inspected for damage.
   Decommission defective products immediately. Replace damaged products. Repairs are not possible.
- WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.
- The products are suitable for applications in plant, controller, and electrical device engineering.
- When operating the connectors in outdoor applications, they must be separately protected against environmental influences.
- Assembled products may not be manipulated or improperly opened.
- Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products).
- When using the product in direct connection with third-party manufacturers, the user is responsible.
- For operating voltages > 50 V AC, conductive connector housings must be grounded
- Ensure that the protective or functional ground has been properly connected.
- VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector
- Observe the corresponding technical data. You will find information:
- o On the product
- o On the packing label
- o In the supplied documentation
- o Online at phoenixcontact.com/products under the product
- Only use tools recommended by Phoenix Contact
- The installation notes/Design In documents online on the download page at phoenixcontact.com/products must be observed for this product.
- Use a protective cap to protect connectors that are not in use. The suitable accessories are available online in the accessory section of the product at phoenixcontact.com/products
- Operate the connector only when it is fully plugged in.



https://www.phoenixcontact.com/us/products/1852943



<ul> <li>Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.</li> </ul>
<ul> <li>Observe the minimum bending radius of the cable. Lay the cable without twisting it.</li> </ul>
<ul> <li>The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).</li> </ul>

### Product properties

Product type	Sleeve housings
Product family	VARIOCON
Туре	VC2
No. of cable outlets	1
Type of the screw connection	Pg21
Fixing screws	M4
Shielded	no
Cable outlet	angled

### Connection data

Tightening torque 1.2	2 1.8 Nm
-----------------------	----------

### **Dimensions**

Dimensional drawing	2.6
Width	33 mm
Height	75.6 mm
Length	80.8 mm
Thread type on seal side	Pg21

### Material specifications

Color	gray
Color of the housing part	gray
Material	Polyamide
Flammability rating according to UL 94	V0
Seal material	EPDM
	NBR
Housing material	Polyamide
O-ring material	NBR
Material of locking screw	Stainless steel

### Mechanical properties



https://www.phoenixcontact.com/us/products/1852943



#### Mechanical data

Type of the screw connection	Pg21
Locking type	Screw

### Environmental and real-life conditions

#### Ambient conditions

Degree of protection	IP67 (DIN IEC 60529)
	IP67
Ambient temperature (operation)	-40 °C 80 °C

### Mounting

Fixing screws	M4


1852943

https://www.phoenixcontact.com/us/products/1852943




### Drawings

### Dimensional drawing

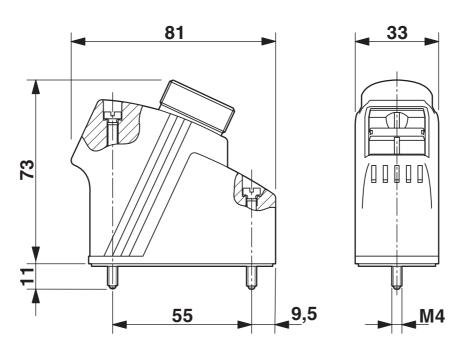

Dimensional drawing

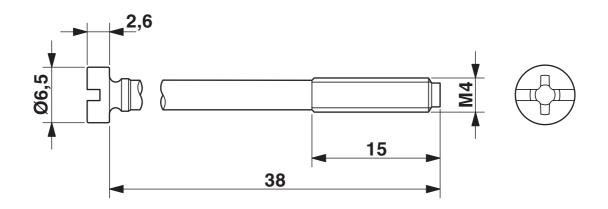


1852943

https://www.phoenixcontact.com/us/products/1852943



### Dimensional drawing

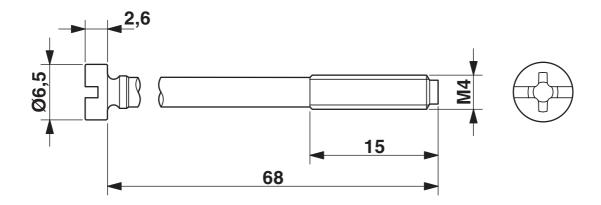



https://www.phoenixcontact.com/us/products/1852943



### Classifications

UNSPSC 21.0

#### **ECLASS**

	ECLASS-11.0	27440202
	ECLASS-12.0	27440202
	ECLASS-13.0	27440202
ETIM		
	ETIM 9.0	EC000437
UN	SPSC	

31261500



https://www.phoenixcontact.com/us/products/1852943



### Environmental product compliance

EU R	oHS
------	-----

Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%



https://www.phoenixcontact.com/us/products/1852943



#### Accessories

VC-BZS WH - Marking label

1852875

https://www.phoenixcontact.com/us/products/1852875



Marker labels, unprinted, 5-section, for individual labeling with M-PEN or CMS system, white

### VC-K-KV-PG21(7-10,5) - Cable gland

1853890

https://www.phoenixcontact.com/us/products/1853890



Half screw connection Pg21, made of plastic, consisting of rubber seal with one hole and one pressure screw, for type 2 - 4 housings, cable [mm] 7.5 - 10.5



https://www.phoenixcontact.com/us/products/1852943



#### VC-K-KV-PG21(9-13) - Cable gland

1853900

https://www.phoenixcontact.com/us/products/1853900



Half screw connection Pg21, made of plastic, consisting of rubber seal with one hole and one pressure screw, for type 2 - 4 housings, cable [mm] 9 - 13

#### VC-K-KV-PG21(11,5-15,5) - Cable gland

1853913

https://www.phoenixcontact.com/us/products/1853913



Half screw connection Pg21, made of plastic, consisting of rubber seal with one hole and one pressure screw, for type 2 - 4 housings, cable [mm] 11.5 - 15.5



https://www.phoenixcontact.com/us/products/1852943



#### VC-K-KV-PG21(14-18) - Cable gland

1853926

https://www.phoenixcontact.com/us/products/1853926



Half screw connection Pg21, made of plastic, consisting of rubber seal with one hole and one pressure screw, for type 2 - 4 housings, cable [mm] 14 - 18

#### VC-K-KV-PG21(17-20,5) - Cable gland

1853939

https://www.phoenixcontact.com/us/products/1853939



Half screw connection Pg21, made of plastic, consisting of rubber seal with one hole and one pressure screw, for type 2 - 4 housings, cable [mm] 17 - 20.5



https://www.phoenixcontact.com/us/products/1852943



#### VC-K-KV-PG21 1X6/2X9 - Cable gland

#### 1885538

https://www.phoenixcontact.com/us/products/1885538



Half screw connection Pg21, made of plastic, consisting of rubber seal with several holes (1 x 6 mm/2 x 9 mm) and a pressure screw, for cable screw connection support VC-M-KV-PG21......

#### VC-K-KV-PG21-1X8,5/1X12 - Cable gland

#### 1885279

https://www.phoenixcontact.com/us/products/1885279



Half screw connection Pg21, made of plastic, consisting of rubber seal with several holes (1 x  $8.5 \text{ mm/1} \times 12 \text{ mm}$ ) and a pressure screw, for cable screw connection thread VC-M-KV-PG21......



https://www.phoenixcontact.com/us/products/1852943



#### VC-K-KV-PG21-2X4,5/1X13 - Cable gland

1885282

https://www.phoenixcontact.com/us/products/1885282



Half screw connection Pg21, made of plastic, consisting of rubber seal with several holes (2 x  $4.5 \text{ mm/1} \times 13 \text{ mm}$ ) and a pressure screw, for cable screw connection thread VC-M-KV-PG21......

#### VC-K-KV-PG21 2X6/2X8 - Cable gland

1885554

https://www.phoenixcontact.com/us/products/1885554



Half screw connection Pg21, made of plastic, consisting of rubber seal with several holes (2 x 6 mm/2 x 8 mm) and a pressure screw, for cable screw connection support VC-M-KV-PG21......



https://www.phoenixcontact.com/us/products/1852943



#### VC-K-KV-PG21 2X7,2/1X10,5 - Cable gland

#### 1885567

https://www.phoenixcontact.com/us/products/1885567



Half screw connection Pg21, made of plastic, consisting of rubber seal with several holes (2 x 7.2 mm/ 1 x 10.5 mm) and a pressure screw, for cable screw connection thread VC-M-KV-PG21......

#### VC-K-KV-PG21 3X7 - Cable gland

#### 1885570

https://www.phoenixcontact.com/us/products/1885570



Half screw connection Pg21, made of plastic, consisting of rubber seal with several holes (3 x 7 mm) and one pressure screw, for cable screw connection support VC-M-KV-PG21......



https://www.phoenixcontact.com/us/products/1852943



#### VC-K-KV-PG21 3X9 - Cable gland

#### 1885583

https://www.phoenixcontact.com/us/products/1885583



Half screw connection Pg21, made of plastic, consisting of rubber seal with several holes (3 x 9 mm) and one pressure screw, for cable screw connection support VC-M-KV-PG21.......

#### VC-K-KV-PG21 4X6,5 - Cable gland

#### 1885596

https://www.phoenixcontact.com/us/products/1885596



Half screw connection Pg21, made of plastic, consisting of rubber seal with several holes (4  $\times$  6.5 mm) and one pressure screw, for cable screw connection support VC-M-KV-PG21......



https://www.phoenixcontact.com/us/products/1852943



#### VC-K-KV-PG21 4X8 - Cable gland

1885606

https://www.phoenixcontact.com/us/products/1885606



Half screw connection Pg21, made of plastic, consisting of rubber seal with several holes (4  $\times$  8 mm) and one pressure screw, for type 2 - 4 housings

#### VC-M-KV-PG21/M32 ST - Cable gland

1644397

https://www.phoenixcontact.com/us/products/1644397



Cable gland for Pg21 half screw connection to M32 housing entry, metal



https://www.phoenixcontact.com/us/products/1852943



1628354

https://www.phoenixcontact.com/us/products/1628354

M4x38x15 mm cylinder screw as replacement for VC sleeve housing

#### VC-SCHR.ZYL-B-M4X68X15-Z2L-V4A - Connector component

1628355

https://www.phoenixcontact.com/us/products/1628355

M4x68x15 mm cylinder screw as replacement for VC sleeve housing



https://www.phoenixcontact.com/us/products/1852943



#### VC-O-RING 3X1,5 NBR-NT70:100 - Connector component

1628356

https://www.phoenixcontact.com/us/products/1628356

O-ring as replacement for VC sleeve housing



#### VC-SD2 - Protective cover

1853683

https://www.phoenixcontact.com/us/products/1853683





https://www.phoenixcontact.com/us/products/1852943



#### VC-SD-T2 - Protective cover

1886731

https://www.phoenixcontact.com/us/products/1886731



Protective cover, design: VC2, housing material: PA 6, color: gray

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com