

# HC-COM-Q08-I-PT-M - Contact insert



1079553

<https://www.phoenixcontact.com/us/products/1079553>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact insert, number of positions: 8+PE, size: COM, power contacts: 8, control contacts: 0, number of connections per position: 1, Pin, Push-in connection, 320 V, 16 A, 0.5 mm<sup>2</sup> ... 2.5 mm<sup>2</sup>, application: Power

## Product description

Contact insert, incl. 4 mounting screws

## Your advantages

- Easy installation without tools, even when mounted, with push-in connection technology
- Shortest installation time compared to other connection technologies
- Quick and effortless wiring, in particular when space is tight
- Automatic cabling with robots possible
- Safe wiring and operation with color-coded actuators
- Shock and vibration-resistant in accordance with DIN EN 61373
- Cost-effective and fast coding with plastic profiles

## Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 1079553             |
| Packing unit                         | 1 pc                |
| Minimum order quantity               | 1 pc                |
| Sales key                            | BF61                |
| Product key                          | BF7ABH              |
| Catalog page                         | Page 649 (C-2-2019) |
| GTIN                                 | 4055626800318       |
| Weight per piece (including packing) | 38.5 g              |
| Weight per piece (excluding packing) | 38.5 g              |
| Customs tariff number                | 85366990            |
| Country of origin                    | CN                  |

# HC-COM-Q08-I-PT-M - Contact insert

1079553

<https://www.phoenixcontact.com/us/products/1079553>



## Technical data

### Notes

|         |   |
|---------|---|
| General | for flexible conductors with or without ferrules  |
| General | Connectors may be operated only when there is no load/voltage.  |
| General | Flexible conductors may be used without ferrules as long as they comply with IEC 60228 Class 1 ... 5. The individual litz wires must have a min. diameter of 0.17 mm. |

### Mounting

|               |   |
|---------------|---|
| Assembly note | To ensure correct use, installation in housing with IP54 protection or better is required |
|---------------|---|


### Product properties

|                                    |  |
|------------------------------------|--|
| Product type                       | Contact insert with a fixed no. of positions |
| Series                             | HC-COM                                       |
| Application                        | Power  |
| Type                               | COM  |
| Number of positions                | 8  |
| Connection profile                 | 8+PE   |
| Contact numbering                  | 1 - 8  |
| Number of connections per position | 1  |
| No. of power contacts              | 8  |
| No. of control contacts            | 0  |
| Contact material type              | turned                                       |

### Insulation characteristics

|                      |     |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution  | 3   |

### Dimensions
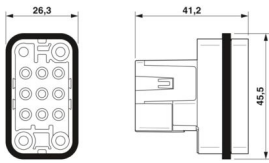
|                     |  |
|---------------------|--|
| Dimensional drawing |  |
| Width               | 25.6 mm  |
| Height              | 48.05 mm   |
| Length              | 45 mm  |

### Mechanical characteristics

|                  |        |
|------------------|--------|
| Contact diameter | 2.5 mm |
|------------------|--------|

### Connection data

# HC-COM-Q08-I-PT-M - Contact insert



1079553

<https://www.phoenixcontact.com/us/products/1079553>

## Connection technology

|                                    |                    |
|------------------------------------|--------------------|
| Connection technology              | Push-in connection |
| Number of connections per position | 1                  |
| Connection in acc. with standard   | IEC / EN           |

## Conductor connection

|   |   |
|---|---|
| Conductor cross section                 | 0.5 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Connection cross section AWG            | 20 ... 14                                   |
| Stripping length of the individual wire | 10 mm (Power)                               |

## Electrical properties

|                                  |       |
|----------------------------------|-------|
| Rated voltage (III/2) contacts   | 500 V |
| Rated voltage (III/3)            | 320 V |
| Rated voltage for power contacts | 500   |
| Rated surge voltage              | 6 kV  |
| Rated current                    | 16 A  |

## Mechanical properties

### Mechanical data

|                             |       |
|-----------------------------|-------|
| Insertion/withdrawal cycles | ≥ 500 |
|-----------------------------|-------|

## Material specifications

|  |   |
|--|---|
| Flammability rating according to UL 94 | V0  |
| Seal material Profile gasket           | NBR, conductive   |
| Contact material                       | Copper alloy  |
| Contact surface material               | Ag  |
| Contact carrier material               | PC  |
| Standards/regulations                  | PC: Fire protection in rail vehicles - requirement sets R22, R23, and R24 acc. to DIN EN 45545-2 (Risk level HL1 - HL3) |

## Environmental and real-life conditions

### Ambient conditions

|                                 |  |
|---------------------------------|--|
| Ambient temperature (operation) | -40 °C ... 125 °C (including heating up of contacts) |
|---------------------------------|--|

## Standards and regulations

### Testing

|                       |   |
|-----------------------|---|
| Standards/regulations | PC: Fire protection in rail vehicles - requirement sets R22, R23, and R24 acc. to DIN EN 45545-2 (Risk level HL1 - HL3) |
|-----------------------|---|

HC-COM-Q08-I-PT-M - Contact insert




1079553

<https://www.phoenixcontact.com/us/products/1079553>


Drawings

Dimensional drawing

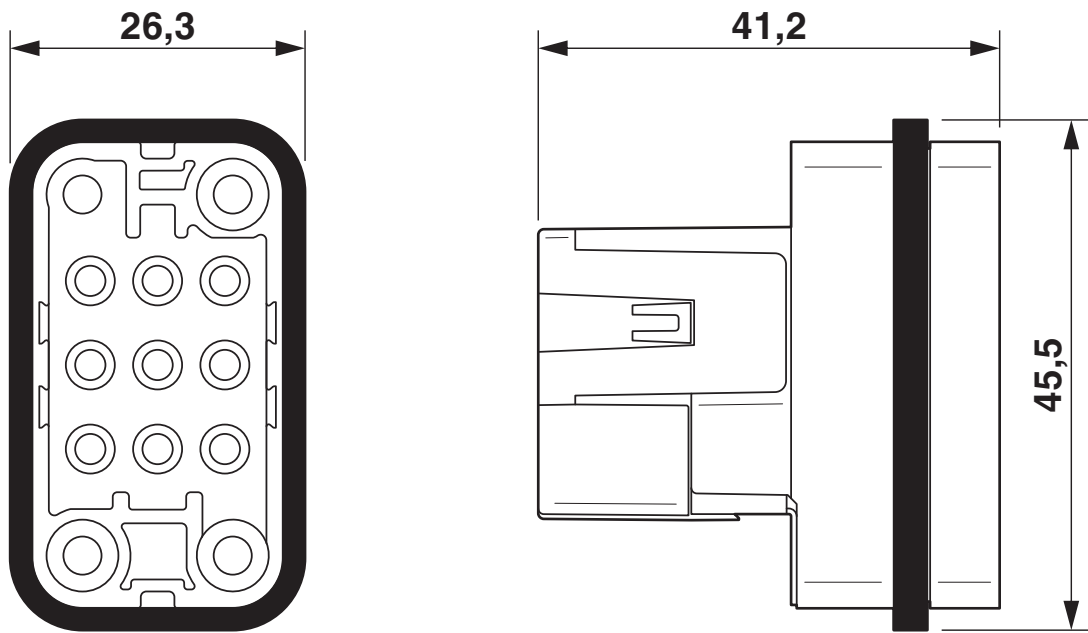

Dimensional drawing

Diagram

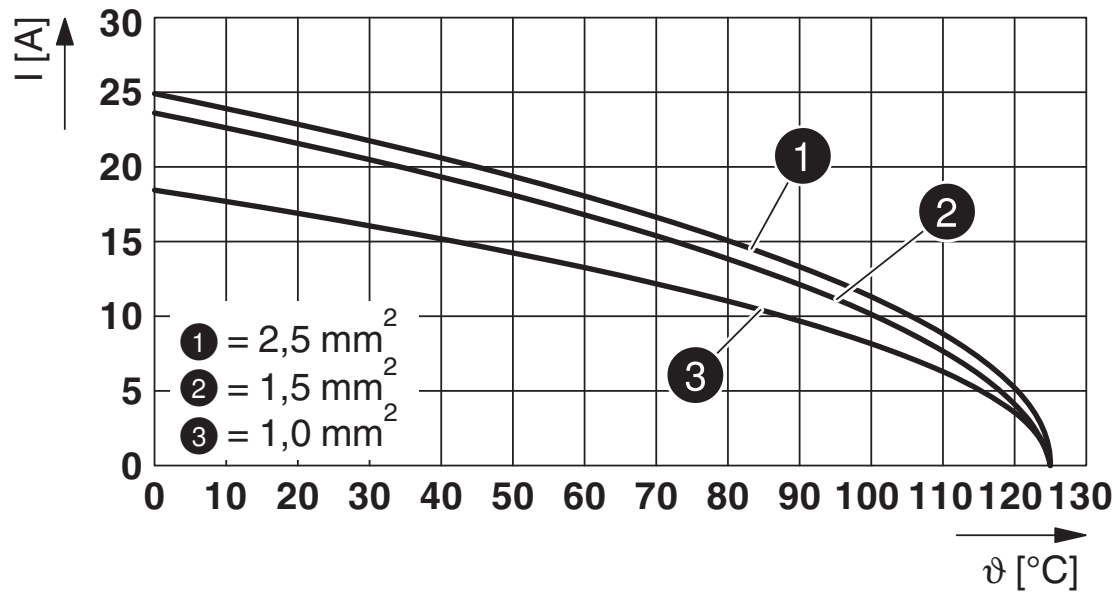

Derating diagram

# HC-COM-Q08-I-PT-M - Contact insert




1079553

<https://www.phoenixcontact.com/us/products/1079553>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1079553>

|   |  |                                |                   |                               |
|---|--|--------------------------------|-------------------|-------------------------------|
|  | <b>UL Recognized</b><br>Approval ID: E468743 |                                |                   |                               |
|   | Nominal voltage U <sub>N</sub>               | Nominal current I <sub>N</sub> | Cross section AWG | Cross section mm <sup>2</sup> |
|   | 600 V  | 20 A                           | - 14              | -                             |

# HC-COM-Q08-I-PT-M - Contact insert



1079553

<https://www.phoenixcontact.com/us/products/1079553>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27440205 |
| ECLASS-12.0 | 27440205 |
| ECLASS-13.0 | 27440205 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC000438 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121500 |
|-------------|----------|

# HC-COM-Q08-I-PT-M - Contact insert

1079553

<https://www.phoenixcontact.com/us/products/1079553>



## Environmental product compliance

|   |  |
|---|--|
| EU RoHS                                 |  |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
| China RoHS                              |  |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|   | No hazardous substances above the limits |
| EU REACH SVHC                           |  |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |

# HC-COM-Q08-I-PT-M - Contact insert

1079553

<https://www.phoenixcontact.com/us/products/1079553>



## Accessories

### CP-HC-S - Coding profile

1410916

<https://www.phoenixcontact.com/us/products/1410916>

Coding profile, for contact inserts HC-BB... / HC-A10... / HC-A16...



---

### HC-COM-Q08-I-PT-F - Contact insert

1079554

<https://www.phoenixcontact.com/us/products/1079554>



Contact insert, number of positions: 8+PE, size: COM, power contacts: 8, control contacts: 0, number of connections per position: 1, Socket, Push-in connection, 320 V, 16 A, 0.5 mm<sup>2</sup> ... 2.5 mm<sup>2</sup>, application: Power



# HC-COM-Q08-I-PT-M - Contact insert

1079553

<https://www.phoenixcontact.com/us/products/1079553>



## CF CRIMPHANDY 0,5 - Electrical crimping tool

1212463

<https://www.phoenixcontact.com/us/products/1212463>



Mobile handheld device, battery-powered, for processing on-tape ferrules 0.5 mm<sup>2</sup> with functional end, suitable for PVC insulated conductors (H05V-K), incl. battery, charger, CUTFOX 12 cable cutter, waste guide plate 2, service tool for error correction, and one strip of ferrules 0.5 mm<sup>2</sup>, packed in a robust case.

---

## CF CRIMPHANDY 0,75 - Electrical crimping tool

1212464

<https://www.phoenixcontact.com/us/products/1212464>



Mobile handheld device, battery-powered, for processing on-tape ferrules 0.75 mm<sup>2</sup> with functional end, suitable for PVC insulated conductors (H05V-K), incl. battery, charger, CUTFOX 12 cable cutter, waste guide plate 2, service tool for error correction, and one strip of ferrules 0.75 mm<sup>2</sup>, packed in a robust case.

# HC-COM-Q08-I-PT-M - Contact insert

1079553

<https://www.phoenixcontact.com/us/products/1079553>



## CF CRIMPHANDY 1,0 - Electrical crimping tool

1212465

<https://www.phoenixcontact.com/us/products/1212465>



Mobile handheld device, battery-powered, for processing on-tape ferrules 1.0 mm<sup>2</sup> with functional end, suitable for PVC insulated conductors (H05V-K), incl. battery, charger, CUTFOX 12 cable cutter, waste guide plate 2, service tool for error correction, and one strip of ferrules 1.0 mm<sup>2</sup>, packed in a robust case.

---

## CF CRIMPHANDY 1,5 - Electrical crimping tool

1212466

<https://www.phoenixcontact.com/us/products/1212466>



Mobile handheld device, battery-powered, for processing on-tape ferrules 1.5 mm<sup>2</sup> with functional end, suitable for PVC insulated conductors (H07V-K), incl. battery, charger, CUTFOX 12 cable cutter, waste guide plate 2, service tool for error correction, and one strip of ferrules 1.5 mm<sup>2</sup>, packed in a robust case.

# HC-COM-Q08-I-PT-M - Contact insert

1079553

<https://www.phoenixcontact.com/us/products/1079553>



## CRIMPFOX 6 - Crimping pliers

1212034

<https://www.phoenixcontact.com/us/products/1212034>



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.25 mm<sup>2</sup> ... 6.0 mm<sup>2</sup>, lateral entry, trapezoidal crimp

---

## CRIMPFOX CENTRUS 10S - Crimping pliers

1213154

<https://www.phoenixcontact.com/us/products/1213154>



Crimping pliers, for uninsulated and insulated ferrules, DIN 46228 Part 1 and 4, from 0.14 mm<sup>2</sup> ... 10 mm<sup>2</sup>, also for TWIN ferrules up to 2 x 4 mm<sup>2</sup>, automatic cross section adjustment, lateral insertion, equipped with fall protection

# HC-COM-Q08-I-PT-M - Contact insert

1079553

<https://www.phoenixcontact.com/us/products/1079553>



## CRIMPFOX CENTRUS 6S - Crimping pliers

1213144

<https://www.phoenixcontact.com/us/products/1213144>



Crimping pliers, for uninsulated and insulated ferrules, DIN 46228 Part 1 and 4, from 0.14 mm<sup>2</sup> ... 6 mm<sup>2</sup>, also for TWIN ferrules up to 2 x 4 mm<sup>2</sup>, automatic cross section adjustment, lateral insertion, equipped with fall protection

---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)