

Data sheet

16114.2 WE-LIGHT



Webeasy I/O light control module, 4 digital inputs, 2 relay outputs, If the bus connection fails, the outputs switch to preset, Mounting type: Mounting rail TS 35, Supply voltage range: 20 V - 28 VAC/DC

Business data

Article number	<u>16114.2</u>
Article name	WE-LIGHT
GTIN (EAN)	4044211207571
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	163 g
Weight per piece (including packaging)	203 g
Unit of weight	G
Customs number	85423190
Country of origin	NL
Product description	Controller module

Technical data

BUS data

Bus-Topologie / Kabellänge max.	multidrop line / 500m
Datenübertragungsrate / Bus-Teilnehmer max.	19k2 bps / 64
Bus protocol / interface	Modbus RTU / RS485, halb duplex, nicht isoliert

Dimensions

Length	95 mm
Width	71 mm
Height	60 mm

Connection data

Connection principle	Screw connection
Wire cross-section single core (rigid), min.	0.2 mm ²
Wire cross-section single-core (rigid), max.	4 mm ²
Wire cross-section stranded, min.	0.2 mm ²
Wire cross-section stranded, max.	4 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm ²
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm ²
Stripping length	6 mm
Torque	0.4 Nm


Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2023-06-14
REACH Candidate Substance Note	No
RoHS Conform	yes

Data sheet

16114.2 WE-LIGHT

Media

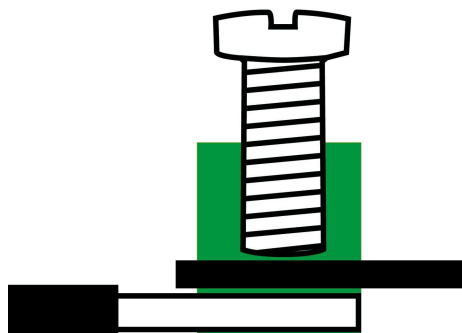

di1	di2	OV	di3	di4	OV	L1	⊕	N
						230V IN		
						WIELAND GST18/ SCREW (-ST)		
— A1	INTERNAL BUS	WE-LIGHT (-ST)				INTERNAL BUS	A1	—C
— A2							A2	—C
— A							A	—C
— B							B	—C
WIELAND GST18/ SCREW (-ST)						WIELAND GST18/ SCREW (-ST)		
230V OUTPUT-1						230V OUTPUT-2		
L1	⊕	N				L1	⊕	N

Accessories
