


Mechanical Specifications

D	22.0mm Max
T	6.0mm Max
Lead Diameter	1.0±0.1mm
S	9.5±1.0mm
L	45.0mm Nom
B	9.0 ±0.5mm
C	2.7±0.5mm

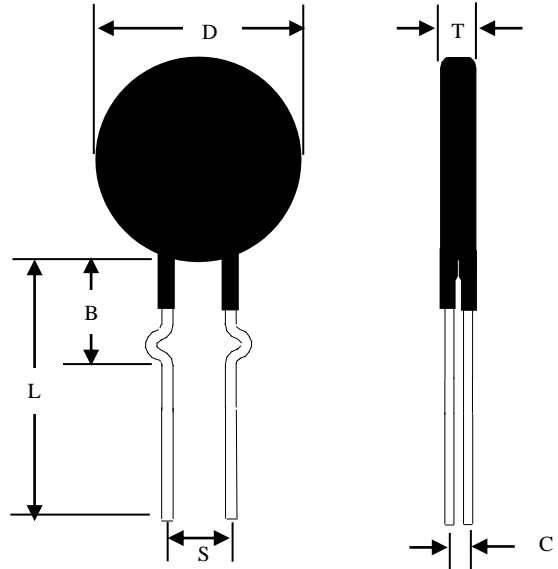

Electrical Specifications

Resistance @ 25°C	16.0Ω ±20%
Max Steady State Current Up to 65°C	4.0 A
Max recommended energy rating (Joules)	100.0 J
Resistance @ 100% of Max Current	0.250 Ω
Resistance @ 50% of Max Current	0.640 Ω
Body Temperature @ 100% Current rating	157°C
Dissipation Constant	38.0mW/°C
Thermal Time Constant	94 seconds
Material Type	“T”
Max Recommended Capacitance @ 120/240 VAC	6500μF / 1500μF

REV	DATE	CHANGE
0	11/11/08	Issue
1	9/22/20	Revise Mechanical Dimensions

**Ametherm, Inc**  
961 Fairview Drive  
Carson City, NV 89701  
Telephone: **800-808-2434**  
Fax: 775 884-0670  
[www.Ametherm.com](http://www.Ametherm.com)

**Reliability Delivered On Time**