

Data sheet

15256.2 RJS 45



Interface module for RJ45, Shielded, CAT 3, Screw connection and RJ45 plug-in connector, Mounting type: Mounting rail TS 35, No. of poles: 9

Business data

Article number	15256.2
Article name	RJS 45
GTIN (EAN)	4044211046828
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	43.9 g
Weight per piece (including packaging)	52 g
Unit of weight	G
Customs number	85369010
Country of origin	NL
Product description	Interface module

Data sheet

15256.2 RJS 45

Technical data

Dimensions

Length	47 mm
Width	31 mm
Height TS 35/7.5	61 mm

Ratings

Overvoltage category	III
Contamination degree	2

Connection data

Connection principle	Screw connection
Number of connections	1
No. of poles	8
Wire cross-section single core (rigid), min.	0.2 mm ²
Wire cross-section single-core (rigid), max.	4 mm ²
Wire cross-section stranded, min.	0.2 mm ²
Wire cross-section stranded, max.	2.5 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm ²
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm ²
Stripping length	7 mm
Torque	0.6 Nm

Input data

Max. operating voltage AC/DC	125 V
Current load per channel, max.	1 A
Category	CAT 3
Transmission speed max.	10 Mbps

Materials

Contact material	Phosphor bronze 1.27 µm Au over 1.27 µm Ni
Flammability class UL 94	V-2
Working temperature, min.	-20 °C
Working temperature, max.	50 °C

Data sheet

15256.2 RJS 45



Technical data

Further technical data

Mounting type	TS 35
Connector type	RJ45
Plug-in cycles acc. to standard	750
Test voltage	0.75 kV
Shielded	✓

Environmental Product Compliance


REACH Conform	yes
REACH Reference date	2023-06-14
REACH Candidate Substance Note	No
RoHS Conform	yes

Approvals

Standards and regulations

Standards / specifications	DIN VDE 0110 / EN 50178
----------------------------	-------------------------

Media

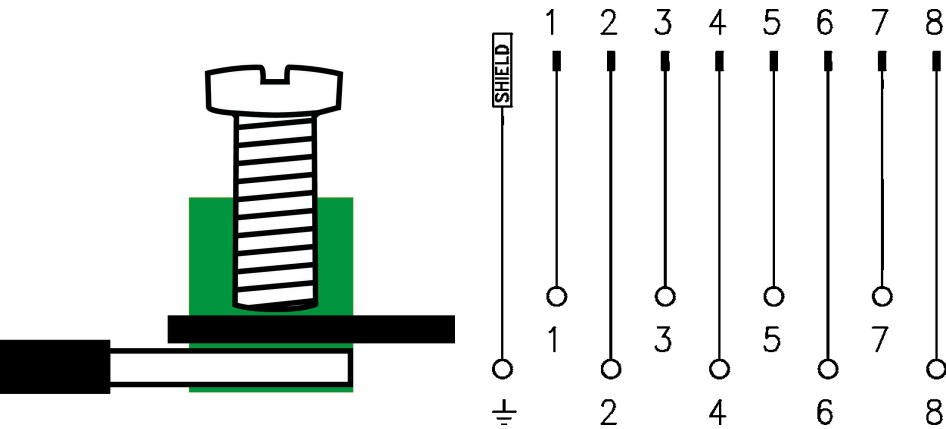

Accessories
