


**THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.**

- SAFETY JACK w/ $\varnothing$  .075 ( $\varnothing$  1.9) X .48 (12) PIN.
- SPECIFICATIONS:  
INSULATOR: POLYAMIDE  
CONTACT: BRASS, NICKEL PLATED  
LOCKING NUT: BRASS, NICKEL PLATED
- RATING:  
VOLTAGE: 1,000 V CAT III P2 (IEC 61010-1)  
CURRENT: 36 A MAX.  
RESISTANCE: <5m $\Omega$ .  
TEMPERATURE: -20° C TO +80° C.
- MOUNTING HOLE: REF. DIAGRAM
- INSULATOR THREAD, M12 X 0.75
- MAXIMUM PANEL THICKNESS: .40 (10.2).

REVISIONS			
REV.	DESCRIPTIONS	DATE	APPROVED
-	CLASS A RELEASED	7/12/99	
A	REVISED CONFIGURATION & MATL. MOUNTING HOLE. NEW TOOLING.	4/18/04	

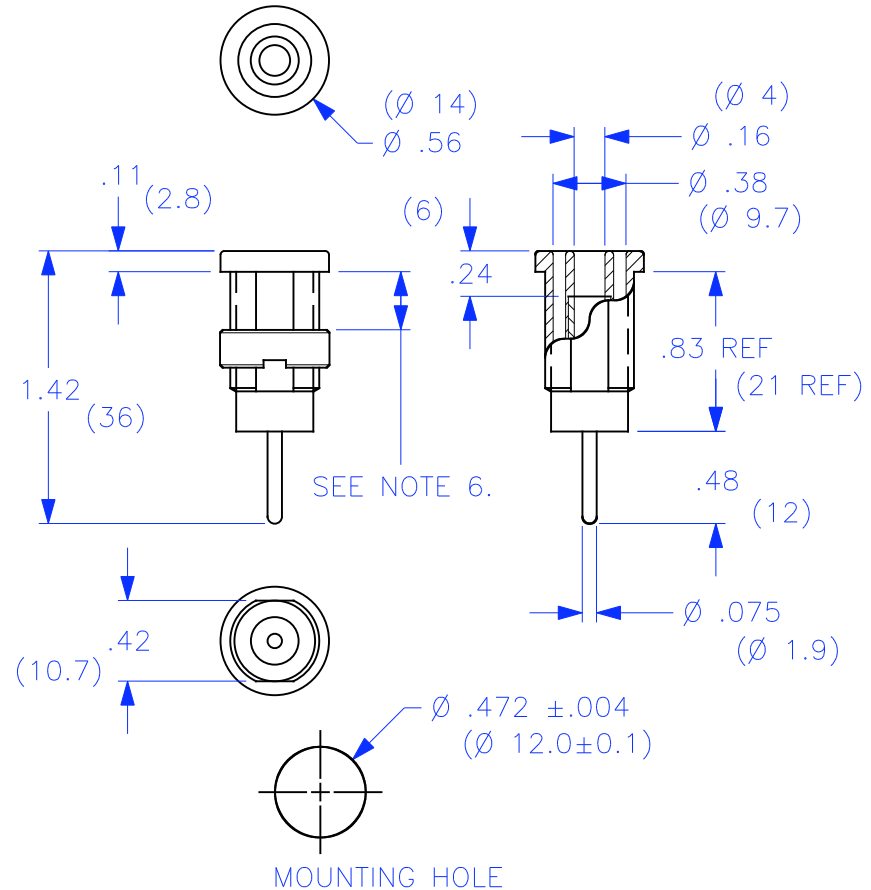


**PART NUMBER**

CT2904-#

- COLOR:
- 0 - BLACK
  - 1 - BROWN
  - 2 - RED
  - 3 - ORANGE
  - 4 - YELLOW
  - 5 - GREEN
  - 6 - BLUE
  - 7 - PURPLE
  - 8 - GRAY
  - 9 - WHITE

**THIRD ANGLE PROJECTION**



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:  
FRACTIONS DECIMALS  
 $\pm 1/32$  .XX  $\pm$  .02  
.XXX  $\pm$  .005  
DO NOT SCALE DRAWING

**CONTRACT NO.**

**APPROVALS**

DRAWN WDH

CHECKED

ENGR.

DESIGN ACTIVITY

**DATE**

7/12/99

**Cal Test Electronics**

22820 Savi Ranch Parkway  
Yorba Linda, CA 92887-4610

**TITLE**

4mm SAFETY JACK,  
w/ $\varnothing$  .075X.48 SHORT PIN

SIZE  
**A**

CAGE CODE  
**43F45**

DWG. NO.

**P290400**

REV.  
A

NEXT ASSY

USED ON

APPLICATION

SCALE 1:1

SHEET 1 OF 1