




**Model 3276 & 4513**  
**Miniature Banana Plug with Threaded Stud**

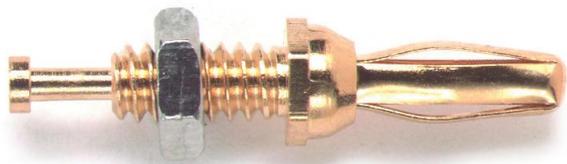

Model	"X" Dimension	"Y" Dimension
<b>3276</b>	.23" (5,8mm)	0.75" (19,05mm)
<b>4513</b>	.48" (12,2mm)	1.00" (25,40mm)

Minimum Panel Thickness is 0.030" (0.76mm)

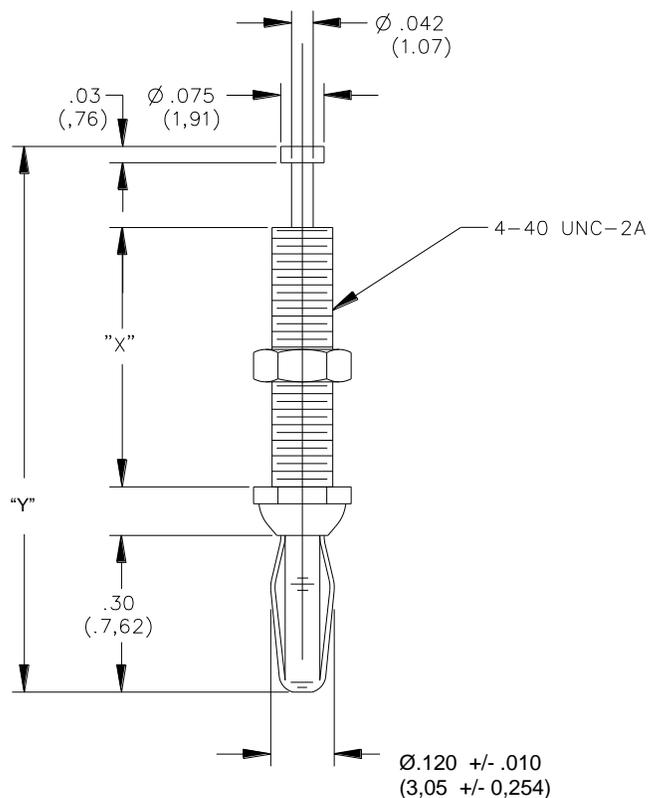

**Features**

- Threaded stud enables fast and easy mounting to panels.
- Solder turret allows wire attachment.
- Miniature banana plug features gold plated Beryllium Copper for long insertion life and low contact resistance.

**Materials**

Miniature Banana Plug:  
 Spring: Beryllium Copper, Gold Plated  
 Body: Brass, Gold Plated  
 Hex Nut: 4-40 Nut, Stainless Steel

**Ratings**

Operating Voltage: 2500 VDC  
 Current: 5 Amperes Max.

**Ordering Information**

Model 3276  
 Model 4513  
 Parts are packaged ten per bag, unassembled.

USA: Technical Support: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)

Europe: 31-(0) 40 2675 150 International: 425-446-5500

Where to Buy: [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.