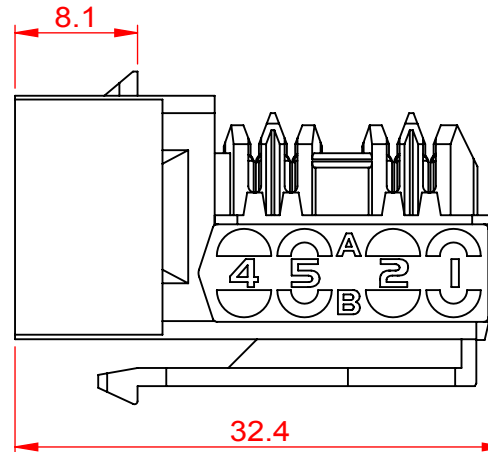



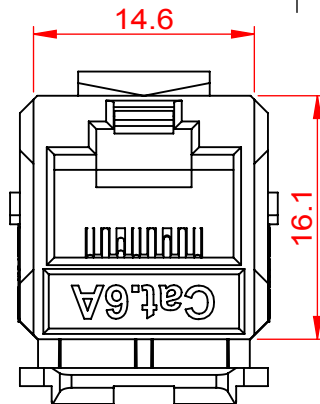
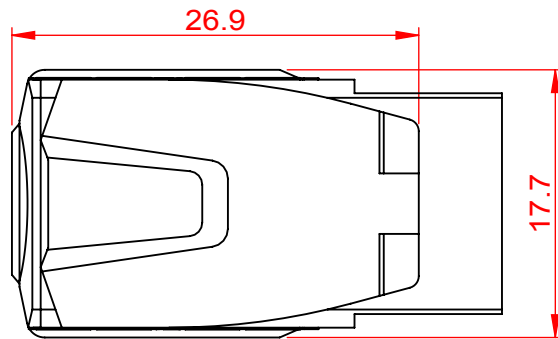
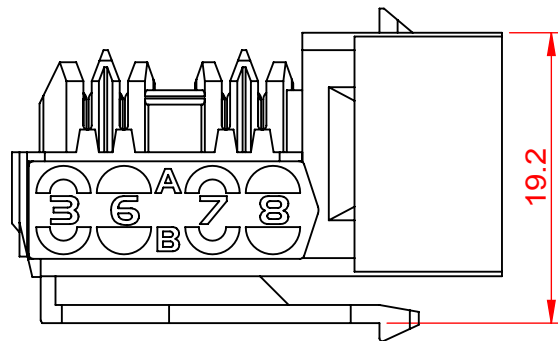


REFERENCE

MATERIAL

KEYSTONE JACK HOUSING : ABS,UL94V-0.
JACK CONTACTS : PHOSPHOR BRONZE,50U" GOLD PLATED.
IDC PLASTIC : PC,UL94V-0.
IDC TERMINALS : PHOSPHOR BRONZE ,TIN OVER NICKEL UNDERCOAT.
IDC CAP : ABS,UL94V-0.

PHYSICAL CHARACTERISTICS

SUITABLE IMPACT TOOL : 110/KRONE STYLE PUNCH DOWN TOOL.
INSERTION LIFE : 750 MATING CYCLES WITH FCC COMPLIANT 8P PLUG.
CONTACT FORCE : 100 GRAMS WITH FCC COMPLIANT 8P PLUG.
PLUG RETENTION FORCE : 11 LBF MIN.
DURABILITY : 200 TERMINATION CYCLES.
CONTACT COMPATIBILITY : ACCOMMODATES 22 TO 24 AWG SOLID.
OPERATING TEMPERATURE RANGE : -10°C TO 60°C.
STORAGE TEMPERATURE RANGE : -40°C TO 68°C.
HUMIDITY : 10%-90%RH.

ELECTRICAL

INSULATION RESISTANCE : 500 MΩ.
DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC.
DC CURRENT RATING : 1.5 Amps.
DC RESISTANCE : 0.1Ω.
CONTACT RESISTANCE : 20mΩ.

NOTE

• ONLY ACCEPT RJ-45 8P8C PLUG.


ACCORDING TO : ANSI/TIA-568-C.2
ISO/IEC 11801 2nd Edition
IEC 60603-7




ENCLOSURE

IDC CAP X 1 PC

NKJ-6201	Black
NKJ-6202	Blue
NKJ-6203	Red
NKJ-6204	Orange
NKJ-6205	Yellow
NKJ-6206	Green
NKJ-6207	Ivory
NKJ-6208	White

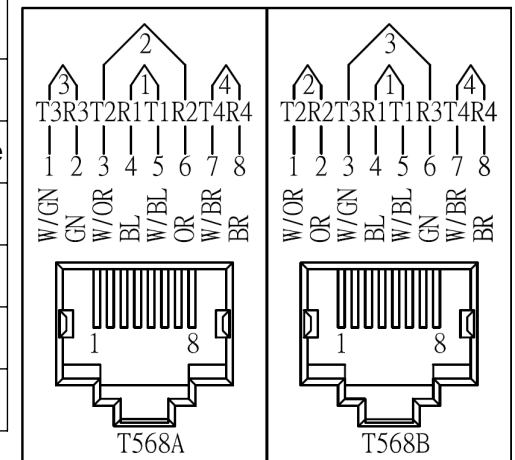

Scale		2:1			 Quest Technology Int'l, Inc 11200 NW 138th St., Medley, FL 33178		
3rd Angle Projection							
Unit		mm			Part No. NKJ-620X		
Date		2013/3/7			Title: CAT6A SLIM-STYLE KEYSTONE JACKS, 8P8C, UL		
Tolerance							
~20	~50	~150	150~	ANGLE	Drawn by	Checked by	Drawing No.
±0.2	±0.4	±0.5	±1.5	±2°	BORUEI		