


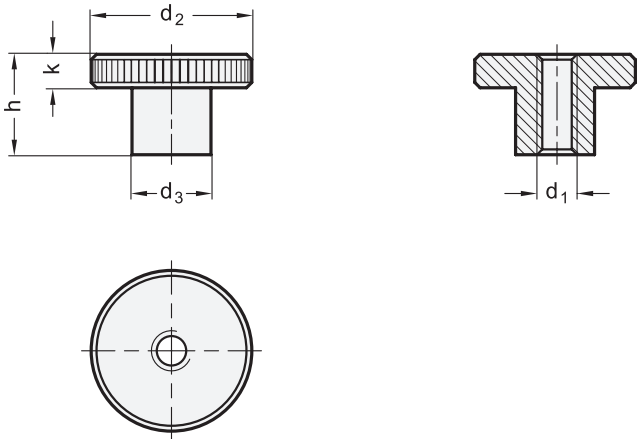

Metric table

1

d ₁ Thread	d ₂	d ₃	h	k
M 2	9 0.35	4.5 0.18	5.3 0.21	2 0.08
M 2.5	11 0.43	5 0.20	6.5 0.26	2.5 0.10
M 3	12 0.47	6 0.24	7.5 0.30	2.5 0.10
M 4	16 0.63	8 0.31	9.5 0.37	3.5 0.14
M 5	20 0.79	10 0.39	11.5 0.45	4 0.16
M 6	24 0.94	12 0.47	15 0.59	5 0.20
M 8	30 1.18	16 0.63	18 0.71	6 0.24
M 10	36 1.42	20 0.79	23 0.91	8 0.31
M 12	40 1.57	22 0.87	25 0.98	10 0.39

Dimensions in: millimeters - inches

Specification2

• Steel

- Property class 5

- Visible face fine turned

- Blackened finish

- Zinc plated, blue passivated finish

—

ZB

• Stainless steel AISI 303

Matte shot-blasted finish

NI

• Strength Values of Nuts → page 2127

• Stainless Steel Characteristics → page 2143

• RoHS compliant

Information

DIN 466 knurled nuts can be tightened and loosened easily without tools.

see also...

• Knurled Nuts GN 536 (Stainless Steel) → page 702

• Knurled Nuts DIN 6303 (Stainless Steel) → page 699

• Flat Knurled Nuts DIN 467 → page 703

• Knurled Nuts DIN 466 with Loss Protection GN 111.7 → page 2046

How to order (Steel, blackened finish)	1 Thread d ₁
DIN 466-M6	
How to order (Steel, zinc plated)	1 Thread d ₁
DIN 466-M10-ZB	2 Finish
How to order (Stainless steel)	1 Thread d ₁
DIN 466-M2-NI	2 Material