


BOXMATE-600 SERIES

If you are looking for a reliable desktop solution to automatically apply labels to small boxes or other square objects, look no further! BOXMATE by Labelmate enables you to consistently and effortlessly label all kinds of square objects by simply placing them on the conveyer and watching the machine do the work. Once the conveyer is activated the label is applied at over 4.5" per second, and most objects are labeled in less than 3 seconds! The Heavy-Duty construction of BOXMATE by Labelmate will withstand even the most high volume production environments.

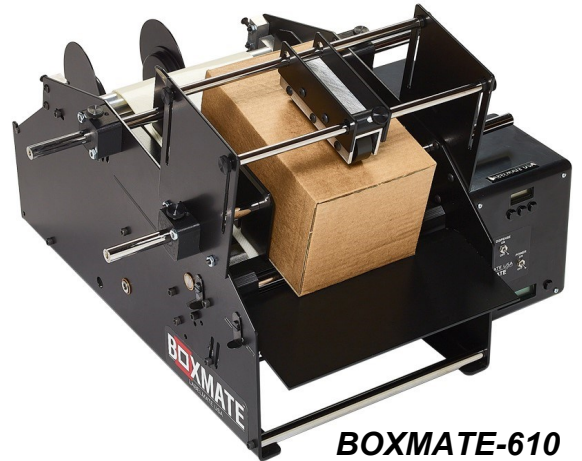

BOXMATE-610

Technical Specifications	BOXMATE-610	BOXMATE-612
Labels Applied per Box	1	
Box Width (in)	1.5 - 6 (38 - 153-mm)	1.5 - 12 (38 - 305-mm)
Box Height ¹ (in)	0.25 - 4.5 (6 - 115-mm)	
Box Length (in)	1 - 25 (25 - 635-mm)	
Label Width (in)	2 - 7 (50 - 178-mm)	2 - 14 (50 - 355-mm)
Label Length (in)	1 - 25 (25 - 635-mm)	
Label Types	Opaque with gaps in between	
Maximum Roll Diameter (in)	9 (230-mm)	
Maximum Roll Weight (lbs)	29 (13.2-kg)	
Core Diameter (in)	0.5 - 6 (13 - 152-mm)	
Max. Speed ² (items per hour)	800	
Dimensions-HWD (in)	12 x 15 x 19.5 (305x380x495-mm)	12 x 22.5 x 19.5 (305x570x495-mm)
Machine Weight (lbs)	50 (22.7-kg)	61 (27.7-kg)
Input Power Specifications ³	120V or 220V	
Warranty	3 Years, Limited	

1. Maximum Height only applies if hold-down roller is used; otherwise the height is unlimited.

12.2019

2. Actual production will depend on operator efficiency in placing and removing boxes to be labeled.

3. Specify desired voltage at time of order.