
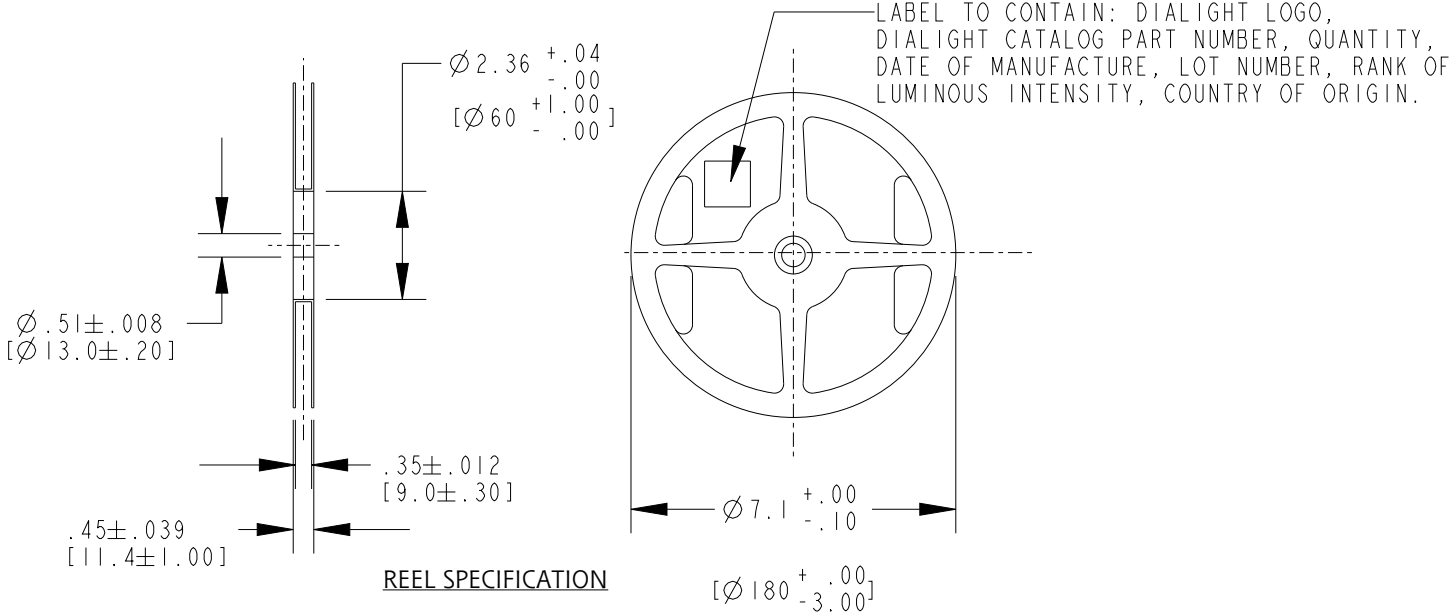
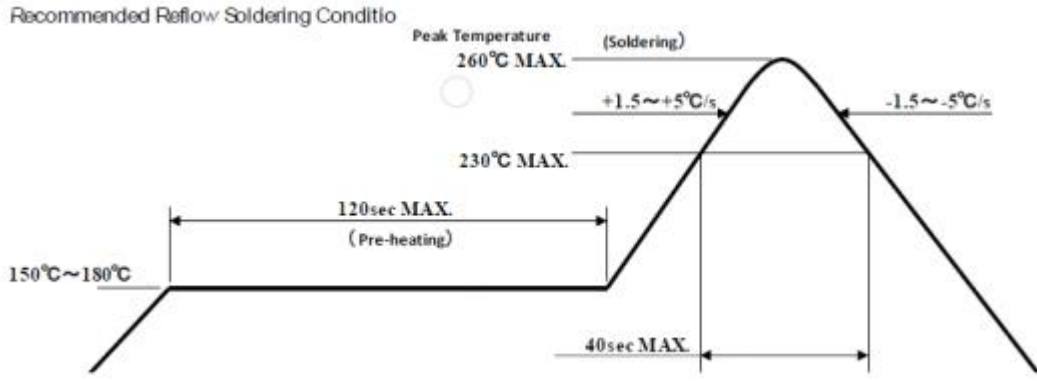
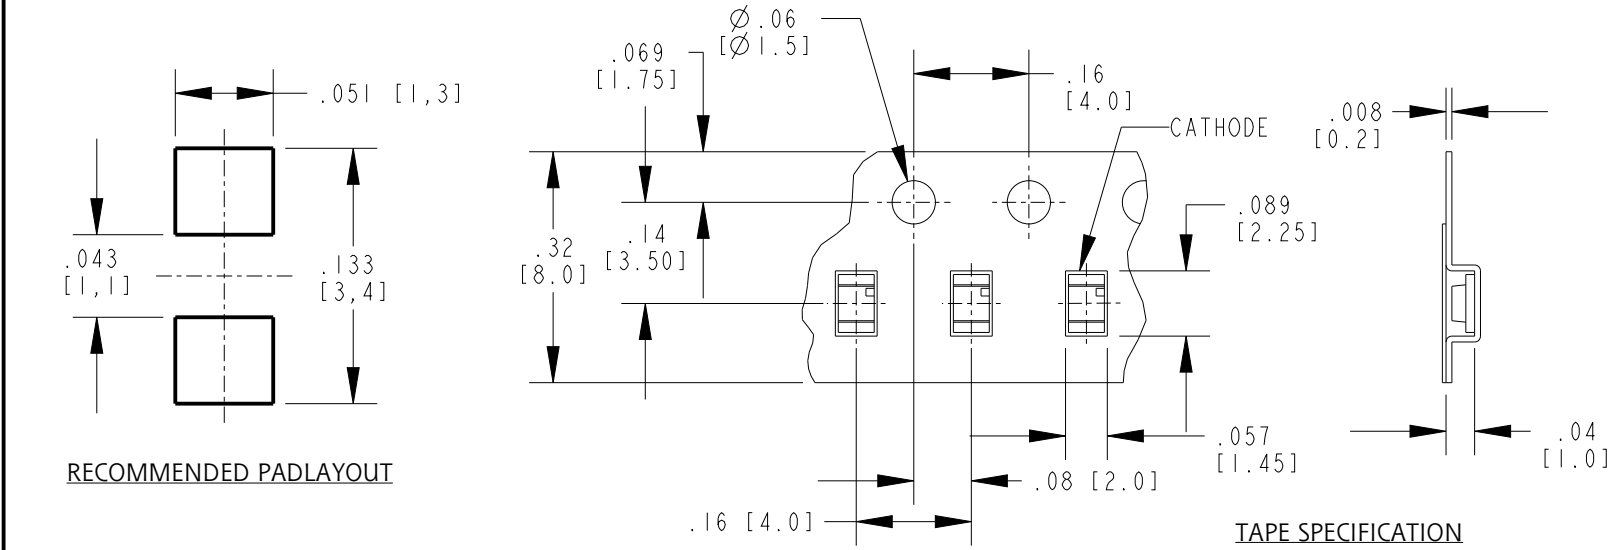



DIALIGHT PART NUMBER	LED CHIP MATERIAL	COLOR	EPOXY COLOR
597-3222-407NF	AlGaInP	YELLOW	WHITE DIFFUSED
597-3222-402NF			
597-3003-407NF	AlGaInP	RED	
597-3003-402NF			

- NOTES:
- PIN NUMBERS ARE FOR REFERENCE ONLY, DESIGNATION NON-EXISTENT ON PART.
 - LABELING FOR REEL AND OUTSIDE OF ALUMINUM BAG, DIALIGHT P/N, QUANTITY PER REEL, DATE CODE, INTENSITY BIN CODE, LOT NUMBER AND COUNTRY OF ORIGIN.
 - THIS PRODUCT IS RoHS COMPLIANT. EACH BAG IS TO BE MARKED WITH RoHS COMPLIANT LABEL OR EQUIVALENT MARKINGS. LED MUST BE Pb FREE.
 - MOISTURE SENSITIVITY LEVEL 3.
 - QUANTITY : PART NUMBER END WITH 407NF REFER AS 4000 PCS/ REEL
PART NUMBER END WITH 402NF REFER AS 20 PCS/ STRIP

REV	ECN NO	REVISIONS	DRN	CKD	APP	DATE
A	107518	NEW RELEASE	JSG	CS	NO	07JUL23

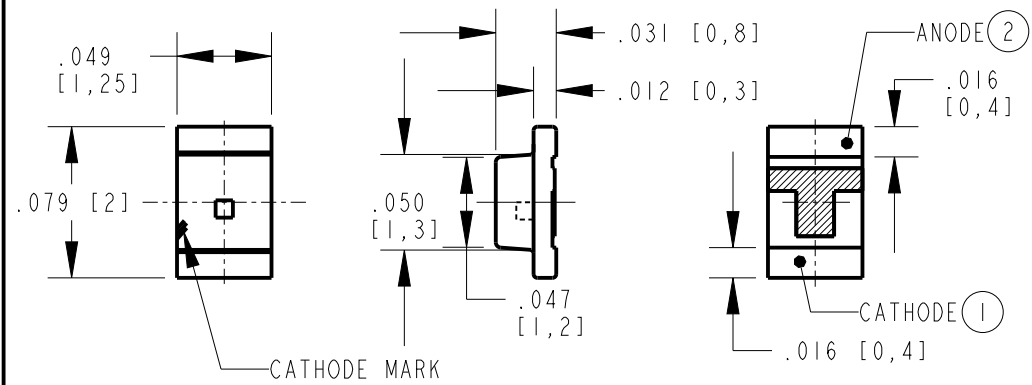

ABSOLUTE MAXIMUM RATINGS AT 25°C							
LED COLOR	POWER DISSIPATON (mW)	FORWARD CURRENT (mA)	PEAK FORWARD CURRENT (mA)	OPERATING TEMPRATURE (°C)	STORAGE TEMPRATURE (°C)	DERATE LINEARLY FROM 75°C (mA/°C)	ELECTROSTATIC DISCHARGE "HBM" (V)
YELLOW	78	30	100	-40°C TO +100°C	-40°C TO +105°C	1.00	1000
RED	78	30	(PULSE WIDTH 1ms, 1/20 DUTY)				

OPERATING CHARACTERISTICS AT 25°C AMBIENT											
LED COLOR	TEST CONDITION (mA)	LUMINOUS INTENSITY (mcd)			FORWARD VOLTAGE (V)		DOMINANT WAVELENGTH (nm)			REVERSE CURRENT (uA)	JUNCTION TEMP. Tj (°C)
	TYP	MIN	TYP	MAX	TYP	MAX	MIN	TYP	MAX	MAX	MAX
YELLOW	20mA	68	91	120	1.9	2.4	586	590	592	10µA @ VR=5V	105
RED		68	91	120	1.9	2.4	620	626	632		105



ATTENTION:
OBSERVE PRECAUTIONS FOR
HANDLING ELECTROSTATIC
SENSITIVE DEVICES

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT CORP. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT CORP.											
DIALIGHT CORP. INTERNAL REFERENCE ONLY = 3D MODEL : 45005973XXX47NF- .1											
SCALE: 10.000		DRAWING NUMBER						REV			
ALL DIM's: INCH (mm)		C-18700						A			
TOLERANCES: UNLESS OTHERWISE SPECIFIED		TITLE									
FRACTIONS: ±1/64		0805 SMD LED									
DECIMALS (.XX): ±.01		MATERIAL									
DECIMALS (.XXX): ±.005		-									
DECIMALS (.XXXX): ±.0005											
ANGLES: ±1°											
FINISH		Dialight									
-		1501 ROUTE 34 SOUTH FARMINGDALE, NY 07727 (732) 919-3119 www.dialight.com									
FSCM 83330		SHEET 1 OF 1 FAMILY TABLE									