

STRADELLA-8-HV-HB-W

~85° wide beam for industrial applications.
Variant with improved creepage distance for
high voltage circuit designs.

SPECIFICATION:

Dimensions	49.5 x 49.5 mm
Height	7.1 mm
Fastening	pin, screw
ROHS compliant	yes ⓘ




MATERIALS:

Component	Type	Material	Colour	Finish	Length
STRADELLA-8-HV-HB-W	Multi-lens	PMMA	clear		49.5

ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
C15985_STRADELLA-8-HV-HB-W » Box size: 480 x 280 x 300 mm	800	160	160	6.0


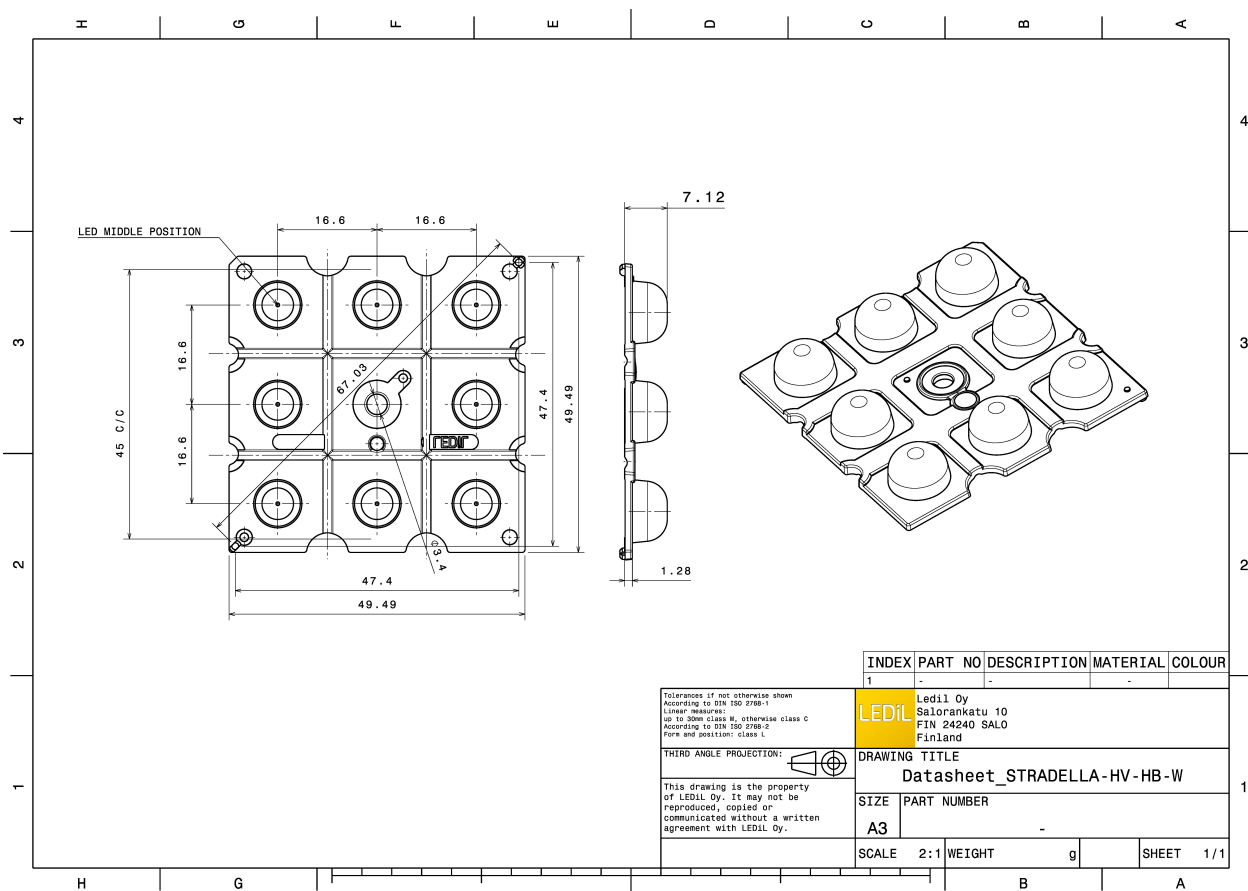


See also our general installation guide: www.ledil.com/installation_guide

OPTICAL RESULTS (MEASURED):





LED J Series 3030
 FWHM / FWTM 92.0° / 133.0°
 Efficiency 97 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

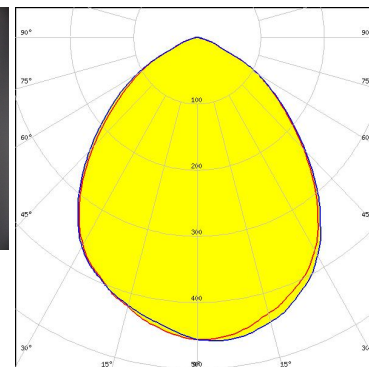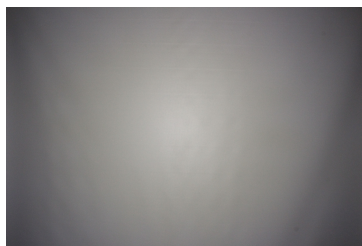

Light distribution files





LED XD16
 FWHM / FWTM 104.0° / 146.0°
 Efficiency 94 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

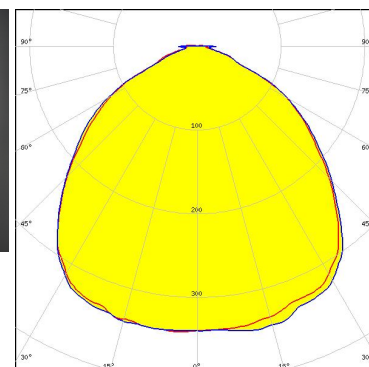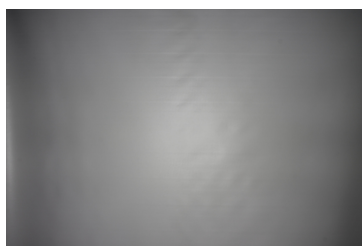

Light distribution files



LED XT-E
 FWHM / FWTM 92.0° / 141.0°
 Efficiency 94 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

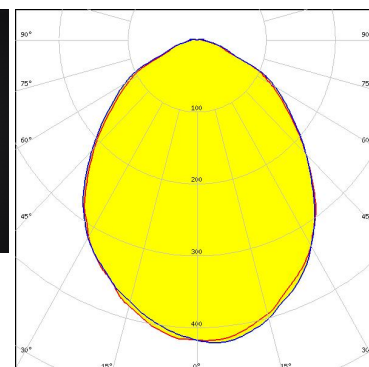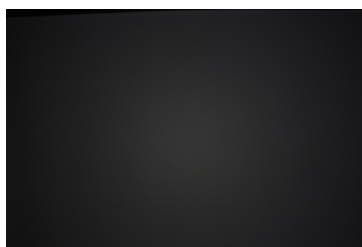


Light distribution files

OPTICAL RESULTS (MEASURED):




LED SST-10-B130
 FWHM / FWTM 99.0° / 137.0°
 Efficiency 95 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type Deep Red
 Required components:

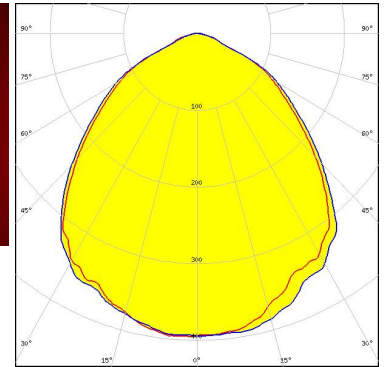

Light distribution files




LED NF2W585AR
 FWHM / FWTM 102.0° / 142.0°
 Efficiency 94 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

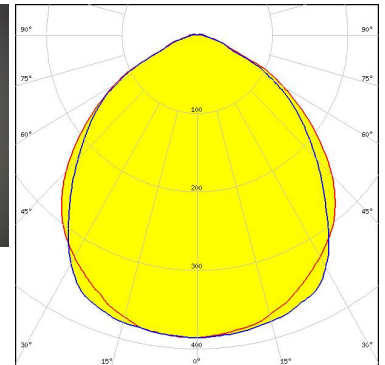

Light distribution files



LED OSCONIQ S 3030 (QSLR31)
 FWHM / FWTM 92.0° / 132.0°
 Efficiency 94 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:


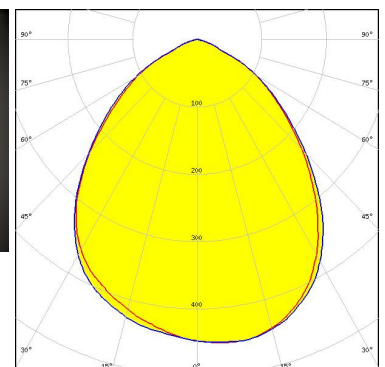


Light distribution files

OPTICAL RESULTS (MEASURED):

PHILIPS



LED	Fortimo FastFlex LED 4x8up PR G5
FWHM / FWTM	90.0° / 131.0°
Efficiency	94 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

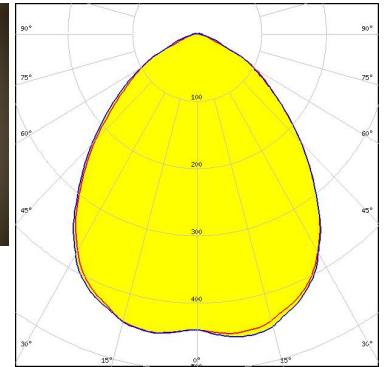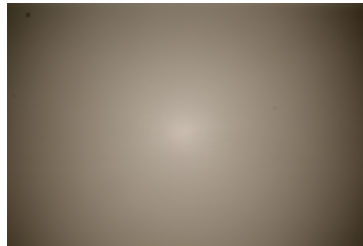

Light distribution files

SAMSUNG



LED	LH151B
FWHM / FWTM	96.0° / 139.0°
Efficiency	95 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

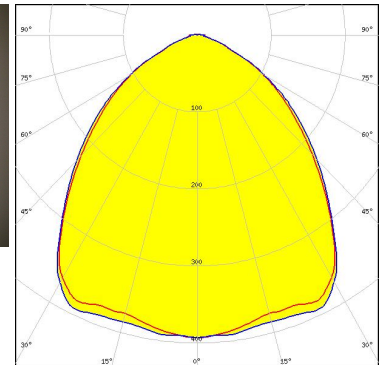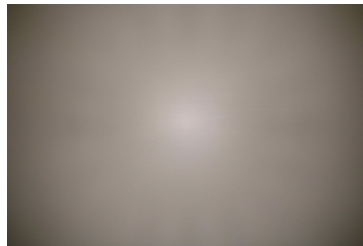

Light distribution files



LED	SEOUL DC 3030C
FWHM / FWTM	92.0° / 132.0°
Efficiency	94 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

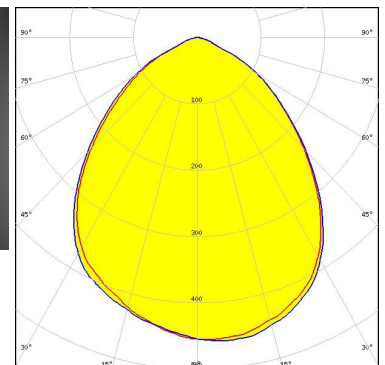
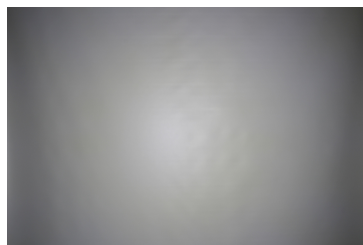


Light distribution files

OPTICAL RESULTS (MEASURED):




LED Z5M3
 FWHM / FWTM 96.0° / 139.0°
 Efficiency 94 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

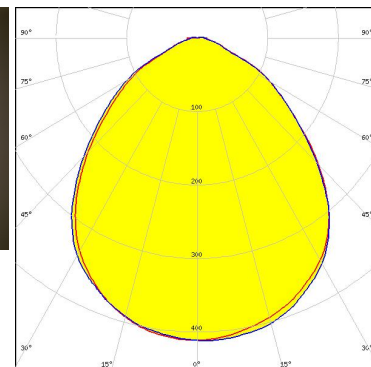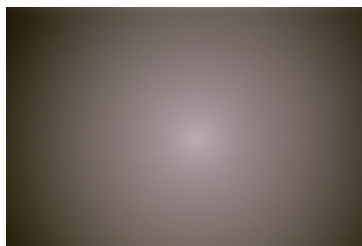

Light distribution files



LED Z5M4
 FWHM / FWTM 94.0° / 126.0°
 Efficiency 98 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

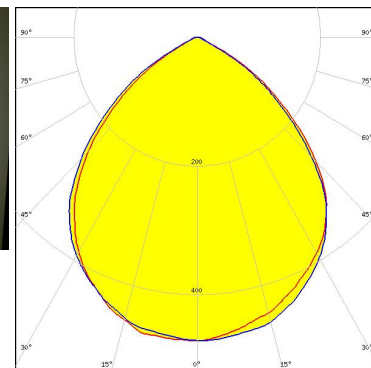

Light distribution files




LED Z8Y19
 FWHM / FWTM 100.0° / 142.0°
 Efficiency 94 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

Light distribution files

OPTICAL RESULTS (SIMULATED):




LED XP-G2 HE
 FWHM / FWTM 92.0° / 132.0°
 Efficiency 94 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

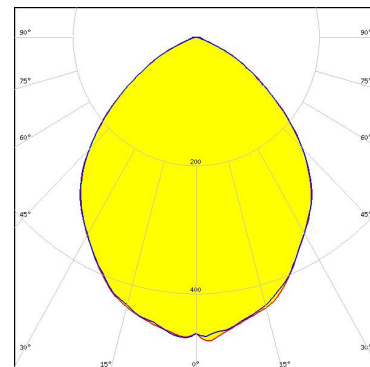

Light distribution files



LED XP-G3
 FWHM / FWTM 96.0° / 138.0°
 Efficiency 94 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

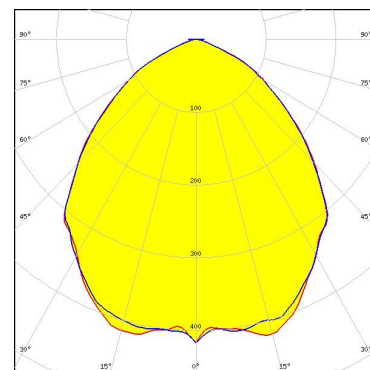

Light distribution files



LED XP-G3
 FWHM / FWTM 94.0° / 141.0°
 Efficiency 91 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

Light distribution files

OPTICAL RESULTS (SIMULATED):



LED	XT-E
FWHM / FWTM	87.0° / 141.0°
Efficiency	92 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

[Light distribution files](#)



LED	LUXEON 3030 2D (Round LES)
FWHM / FWTM	87.0° / 130.0°
Efficiency	94 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

[Light distribution files](#)




LED	LUXEON 3535L HE
FWHM / FWTM	80.0° / 131.0°
Efficiency	94 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

[Light distribution files](#)

OPTICAL RESULTS (SIMULATED):




LED LUXEON CZ
 FWHM / FWTM 52.0° / 122.0°
 Efficiency 96 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

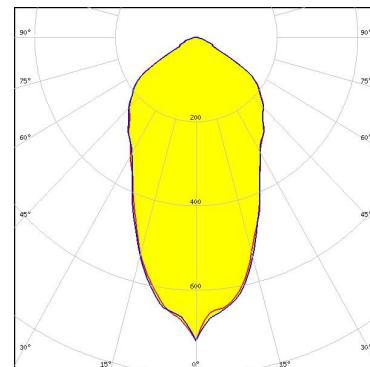

Light distribution files



LED LUXEON CZ
 FWHM / FWTM 93.0° / 136.0°
 Efficiency 97 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

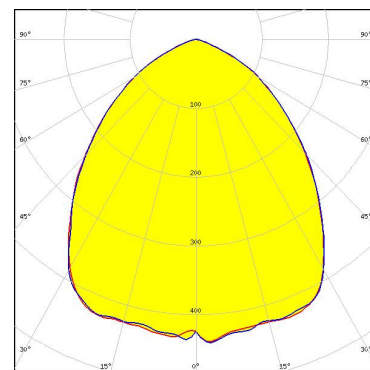

Light distribution files



LED LUXEON HR30
 FWHM / FWTM 82.0° / 130.0°
 Efficiency 93 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

Light distribution files

OPTICAL RESULTS (SIMULATED):




LED	LUXEON TX
FWHM / FWTM	84.0° / 139.0°
Efficiency	92 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Light distribution files



LED	NVSW519A
FWHM / FWTM	93.0° / 130.0°
Efficiency	89 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

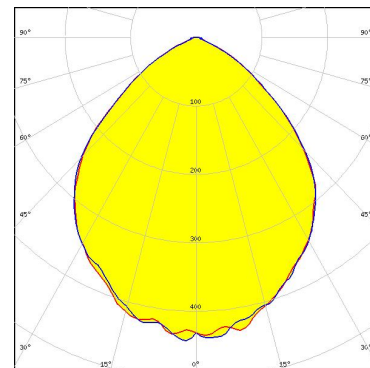

Light distribution files




LED	NVSxx19B/NVSxx19C
FWHM / FWTM	95.0° / 134.0°
Efficiency	91 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors


LED OSCONIQ C 2424
FWHM / FWTM 92.0° / 134.0°
Efficiency 97 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

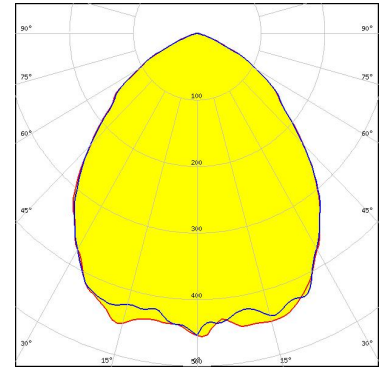

Light distribution files

OSRAM
Opto Semiconductors

LED OSCONIQ C 3030
FWHM / FWTM 90.0° / 132.0°
Efficiency 87 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

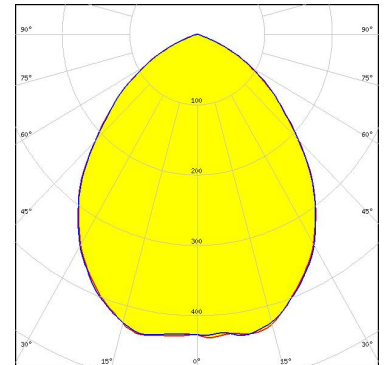


Light distribution files

Protective plate, glass

OSRAM
Opto Semiconductors

LED OSCONIQ C 3030
FWHM / FWTM 90.0° / 134.0°
Efficiency 97 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

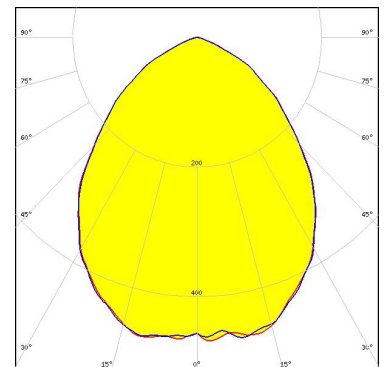


Light distribution files

OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors


LED OSCONIQ P 3030
FWHM / FWTM 82.0° / 132.0°
Efficiency 97 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

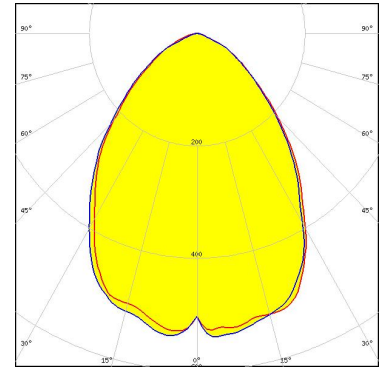

Light distribution files

OSRAM
Opto Semiconductors


LED OSLOM Pure 1414
FWHM / FWTM 92.0° / 133.0 + 134.0°
Efficiency 97 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

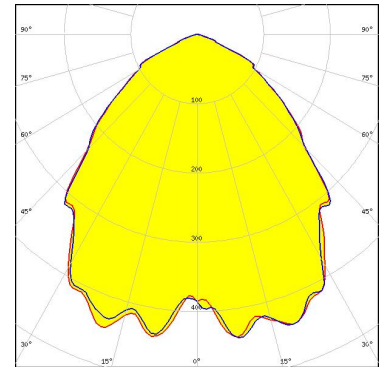

Light distribution files

OSRAM
Opto Semiconductors

LED SFH 4715AS
FWHM / FWTM 71.0° / 109.0°
Efficiency 96 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour/type IR
Required components:

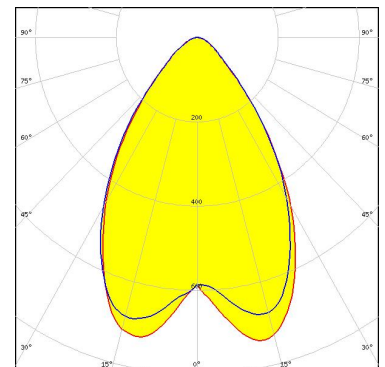


Light distribution files

OPTICAL RESULTS (SIMULATED):

SAMSUNG


LED LH181A
 FWHM / FWTM 97.0° / 143.0°
 Efficiency 94 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

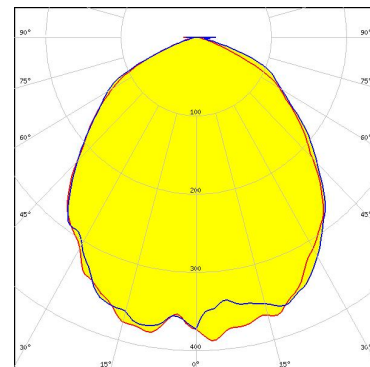

Light distribution files

SAMSUNG


LED LH181B
 FWHM / FWTM 89.0° / 135.0°
 Efficiency 94 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

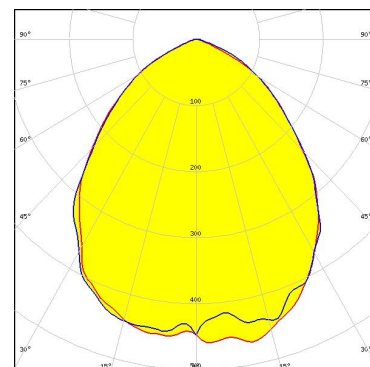

Light distribution files



LED Z8Y22T
 FWHM / FWTM 90.0° / 137.0°
 Efficiency 94 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

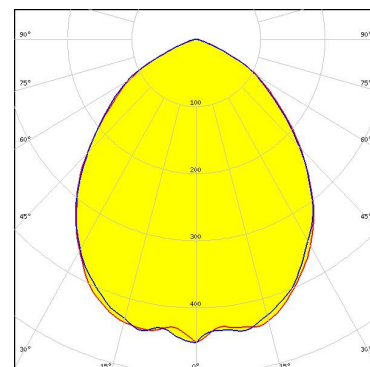

Light distribution files

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Poznan, Poland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)