# Product data sheet

Specification





safety module, Harmony XPS, estop or guard, connected to supply terminals 48 to 240V AC or DC, no inputs, screw

XPSBAC34AP

#### Main

Mani				
Range of product	Harmony Safety Automation			
product or component type	Safety module			
safety module name	XPSBAC			
safety module application	For emergency stop and protective guard applications			
Function of module	Emergency stop button with 2 NC contacts Guard monitoring with 1 or 2 limit switches			
Safety level	Can reach PL e/category 4 for normally open relay contact ISO 13849-1 Can reach SILCL 3 for normally open relay contact IEC 62061 Can reach SIL 3 for normally open relay contact IEC 61508 Can reach PL c/category 1 for normally closed relay contact ISO 13849-1 Can reach SILCL 1 for normally closed relay contact IEC 62061 Can reach SIL 1 for normally closed relay contact IEC 61508			
Safety reliability data	MTTFd > 30 years for normally open relay contact IEC 61508  MTTFd > 30 years for normally open relay contact ISO 13849-1 Dcavy >= 99 % for normally open relay contact ISO 13849-1 PFHd = 1.01E-09 for normally open relay contact ISO 13849-1 HFT = 1 for normally open relay contact IEC 62061 PFHd = 1.01E-09 for normally open relay contact IEC 62061 SFF > 99% for normally open relay contact IEC 62061 HFT = 1 for normally open relay contact IEC 61508-1 PFHd = 1.01E-09 for normally open relay contact IEC 61508-1 SFF > 99% for normally open relay contact IEC 61508-1 Type = B for normally open relay contact IEC 61508-1 MTTFd > 30 years for normally closed relay contact ISO 13849-1 DC > 60 % for normally closed relay contact ISO 13849-1 PFHd = 1.01E-09 for normally closed relay contact ISO 13849-1 HFT=0 for normally closed relay contact IEC 62061 PFHd = 1.01E-09 for normally closed relay contact IEC 62061 HFT=0 for normally closed relay contact IEC 62061 HFT=0 for normally closed relay contact IEC 62061 HFT=0 for normally closed relay contact IEC 61508-1 PFHd = 1.01E-09 for normally closed relay contact IEC 61508-1 PFHd = 1.01E-09 for normally closed relay contact IEC 61508-1 PFHd = 1.01E-09 for normally closed relay contact IEC 61508-1 PFHd = 1.01E-09 for normally closed relay contact IEC 61508-1 PFHd = 1.01E-09 for normally closed relay contact IEC 61508-1			
Electrical circuit type	NC pair			
Connections - terminals  Removable screw terminal block, 0.22.5 mm² solid or flexible Removable screw terminal block, 0.252.5 mm² flexible with ferrule sing Removable screw terminal block, 0.21.5 mm² solid or flexible twin con Removable screw terminal block, 2 x 0.251 mm² flexible with ferrule wend, with bezel  Removable screw terminal block, 2 x 0.51.5 mm² flexible with ferrule wend, with bezel				
[Us] rated supply voltage	48240 V AC - 1510 % 48240 V DC - 2020 %			

## Complementary

Synchronisation time between inputs	Unlimited	
Type of start	Automatic/manual/monitored	
Power consumption in W	2.0 W 48240 V DC	

Jun 29, 2024 Life Is On Schneider

Power consumption in VA	6.0 VA 48240 V AC 50/60 Hz				
Input protection type	Internal, electronic				
safety outputs	4 NO + 1 NC				
safety inputs	0				
Input compatibility	Normally closed circuit ISO 14119 XC limit switch ISO 14119 Mechanical contact ISO 14119 Normally closed circuit ISO 13850				
input terminal	Power supply				
[le] rated operational current	5 A AC-1 for normally open relay contact 3 A AC-15 for normally open relay contact 5 A DC-1 for normally open relay contact 3 A DC-13 for normally open relay contact 3 A AC-1 for normally closed relay contact 1 A AC-15 for normally closed relay contact 3 A DC-1 for normally closed relay contact 1 A DC-13 for normally closed relay contact				
control outputs	0				
[Ith] conventional free air thermal current	6 A				
Associated fuse rating	10 A gG NO relay output circuit IEC 60947-1				
Minimum output current	10 mA relay output				
Minimum output voltage	5 V relay output				
Response time	60 ms at 48240 V AC/DC				
[Ui] rated insulation voltage	300 V 2)IEC 60947-1				
[Uimp] rated impulse withstand voltage	4 kV II IEC 60947-1				
Local signalling	LED green power power ON LED red error error LED yellow state status LED yellow start1 start input LED yellow start2 start input				
mounting support	35 mm symmetrical DIN rail				
Depth	4.7 in (120 mm)				
Height	3.9 in (100 mm)				
Width	0.9 in (22.5 mm)				
net weight	0.441 lb(US) (0.200 kg)				

### **Environment**

Ambient air temperature for operation	-13131 °F (-2555 °C)
Standards	IEC 60947-5-1
	IEC 61508-1 functional safety standard
	IEC 61508-2 functional safety standard
	IEC 61508-3 functional safety standard
	IEC 61508-4 functional safety standard
	IEC 61508-5 functional safety standard
	IEC 61508-6 functional safety standard
	IEC 61508-7 functional safety standard
	ISO 13849-1 functional safety standard
	IEC 62061 functional safety standard
Product certifications	TÜV
	cULus
IP degree of protection	IP20 terminals)IEC 60529
	IP40 housing)IEC 60529
	IP54 mounting area)IEC 60529

Relative humidity 5...95 % non-condensing

## **Packing Units**

Unit Type of Package 1	PCE			
Number of Units in Package 1	1			
Package 1 Height	2.559 in (6.500 cm)			
Package 1 Width	5.827 in (14.800 cm)			
Package 1 Length	6.102 in (15.500 cm)			
Package 1 Weight	11.041 oz (313.000 g)			
Unit Type of Package 2	S03			
Number of Units in Package 2	16			
Package 2 Height	11.811 in (30.000 cm)			
Package 2 Width	11.811 in (30.000 cm)			
Package 2 Length	15.748 in (40.000 cm)			
Package 2 Weight	12.688 lb(US) (5.755 kg)			

## Sustainability Screen Premium

**Green Premium**<sup>TM</sup> **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

#### Well-being performance



Mercury Free



Rohs Exemption Information

Yes


#### **Certifications & Standards**

Reach Regulation	REACh Declaration			
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)			
China Rohs Regulation	China RoHS declaration			
Environmental Disclosure	Product Environmental Profile			
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins			
Circularity Profile	End of Life Information			

#### **Dimensions Drawings**

#### **Dimensions**

#### Front and Side Views

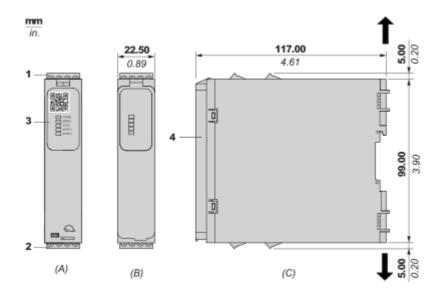


- (A): Product drawing
- (B) : Screw clamp terminal
- (C): Side view
- (1): Removable terminal blocks, top
- (2): Removable terminal blocks, bottom
- (3): LED indicators
- (4) : Sealable transparent cover


mm in.	7.0–8.0 0.28–0.31				<b>a</b>	
	mm²	0,2 2,5	0,252,5	0,21,5	0,25′	1 0,51,5
	AWG	24 12	2412	2416	2418	3 2016
		()c@)		Nm 0.5 0.6		
Ø 3,5 mm (0.14 in)				lb-in	4,4 5,3	

## Mounting and Clearance

#### Mounting to DIN rail

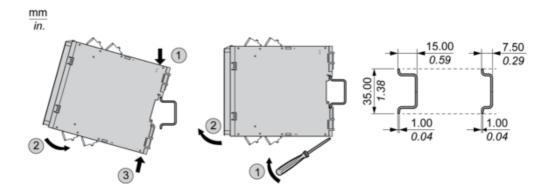


#### **Screw-mounting**

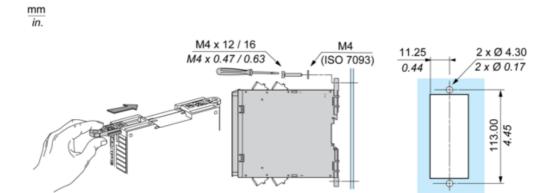

#### Connections and Schema

#### **Wiring Diagram**



(1): A1-A2 (Power supply)
(2): Y1 (Control output of Start/Restart input), Y2 (Input channel for automatic/manual start/restart), Y3 (Input channel for monitored start/restart with falling edge)

13-14-23-24-33-34-43-44-51/61-52-62 : Terminals of the safety-related outputs