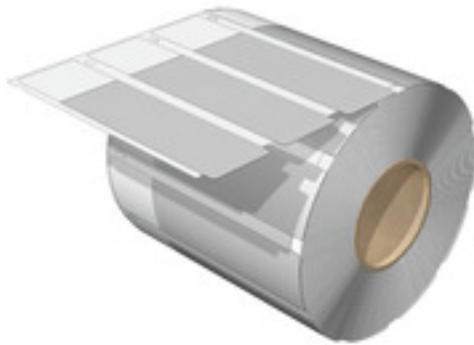


**THM WO-QX 25/100 WS****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

THM WriteOn cable markers on reels are used for labelling conductors and cables with an outside diameter of up to 36 mm. The transparent adhesive strip fixes and protects the printing on the marker surface.

- Protection of the marking against dirt and abrasion by wrapping it with the transparent adhesive strip
- Simple and quick printing with the high-quality thermal transfer printers

**General ordering data**

Version	THM, Conductor and cable markers, 12.2 - 24.4 mm, 25 x 100 mm, white
Order No.	<a href="#">2711950000</a>
Type	THM WO-QX 25/100 WS
GTIN (EAN)	4050118749984
Qty.	1,000 pc(s).
compatible printer	<a href="#">2599430000</a> <a href="#">2599440000</a>

Creation date June 6, 2024 9:55:34 AM CEST

Catalogue status 01.06.2024 / We reserve the right to make technical changes.

## THM WO-QX 25/100 WS

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

### Dimensions and weights

Depth	0.03 mm	Depth (inches)	0.001 inch
Height	25 mm	Height (inches)	0.984 inch
Width	100 mm	Width (inches)	3.937 inch
Net weight	0.47 g		

### Temperatures

Operating temperature range	-40...150 °C
-----------------------------	--------------

### General data

Adhesive	Polyacrylate adhesive		
Approval acc. to UL 969	Yes		
Colour	white		
Halogen	No		
Material	Polyester film		
Number of markers per combination	1 Label reel = Conductor and cable markers		
Number of markers per packaging unit	Form of supply	Label reel	
Number per roll	1,000		
Operating temperature range	-40...150 °C		
Operating temperature range, max.	150 °C		
Operating temperature range, min.	-40 °C		
Orientation of print	horizontal and vertical		
Printed characters	without		
Type of printing	neutral		
UL 94 flammability rating	V-0		
Width	100 mm		

### Conductor and cable markers

Conductor O.D.	12.2 - 24.4 mm	Conductor O.D., max.	24.4 mm
Conductor O.D., min.	12.2 mm	Halogen	No

### Classifications

ETIM 6.0	EC001530	ETIM 7.0	EC001530
ETIM 8.0	EC001530	ETIM 9.0	EC001530
ECLASS 9.0	27-40-04-01	ECLASS 9.1	27-40-04-01
ECLASS 10.0	27-40-04-01	ECLASS 11.0	27-28-11-02
ECLASS 12.0	27-28-11-02	ECLASS 13.0	27-28-11-02

### Approvals

ROHS	Conform
------	---------

### Downloads

Catalogues	<a href="#">Catalogues in PDF-format</a>
------------	--

**Data sheet**

**THM WO-QX 25/100 WS**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**

