

**Discontinued**



### FEATURES

- Self-powered, only two connections required
- -4.5 to -20Vdc, -18 to -50Vdc, and -30 to -264Vdc models
- Can be used with positive-reading DMS-20PC-DCM's
- Ultra-low power consumption (8mA typ.)
- 0.37"/9.4mm high, bright red, LED displays
- Subminiature 1.38" x 0.88" x 1.0" packages

### Functional Specifications

#### Input

Voltage Range: ①

DMS-20PC-4-DCM	-4.50 to -19.99Vdc
DMS-20PC-5-DCM	-18.0 to -50.0Vdc
DMS-20PC-6-DCM	-30 to -264Vdc

Current Consumption:

DMS-20PC-4/5-DCM	13mA (max.)
DMS-20PC-6-DCM	7mA (max.)

#### Performance

Sampling Rate 2.5 readings/second

Resolution:

DMS-20PC-4-DCM	±0.01V
DMS-20PC-5-DCM	±0.1V
DMS-20PC-6-DCM	±1V

Accuracy @ +25°C:

DMS-20PC-4-DCM	±0.01V (typ.), ±0.03V (max.)
DMS-20PC-5-DCM	±0.1V (typ.), ±0.2V (max.)
DMS-20PC-6-DCM	±1V (typ.), ±2V (max.)

#### Mechanical

Dimensions 1.38" x 0.88" x 1.00"

Display Type 3 & 3½ digit, red LED, 0.37"/9.4mm

Weight 1 ounce (28 grams)

Case Material Polycarbonate

6-32 screw torque 6-8 in-lb (0.7 – 0.9N-m)

#### Environmental

Operating Temperature -25 to +60°C

Storage Temperature -40 to +75°C


Humidity (Non-condensing) 0 to 95%

① Operation and accuracy at inputs above or below this range are not specified.

Murata Power Solutions' DMS-20PC-DCM Series of self-powered, negative-reading, dc voltage monitors are great replacements for older, hard-to-read, analog meters. Simply connect a negative voltage across the rear terminals and the meters are fully operational! Negative-input DCM's can be easily combined with positive-reading DMS-20PC-DCM's for monitoring dual-polarity power supplies.

Three versions are available: one for -4.50 to -19.99Vdc (0.01V resolution), one for -18.0 to -50.0Vdc (0.1V resolution), and one for -30 to -264Vdc (1V resolution). Their large, 0.37"/9.4mm, bright red LED displays can be easily read from 15 feet away. Built-in reverse polarity protection assures simple, trouble-free installation.

All DMS-20PC-DCM's employ a high-resolution, 3½ digit A/D converter and precision metal-film resistors to achieve outstanding performance over an operating temperature range of -25 to +60°C. A rugged, epoxy-encapsulated, polycarbonate case provides excellent protection against moisture, shock and vibration.

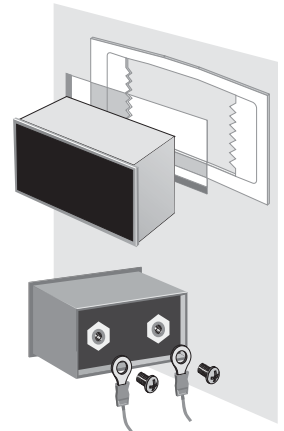

Typical panel mount installation and suggested wiring (user supplied)

### Ordering Information

<b>DMS-20PC-4-DCM-C</b>	-4.50 to -19.99V dc voltage monitor
<b>DMS-20PC-5-DCM-C</b>	-18.0 to -50.0V dc voltage monitor
<b>DMS-20PC-6-DCM-C</b>	-30 to -264V dc voltage monitor
<b>DMS-20-CP</b>	Panel cutout punch
<b>DMS-BZL3-C</b>	Panel mount bezel assembly
<b>DMS-BZL4-C</b>	Panel mount bezel with sealing gasket


Brass screws (6-32 thread) and a panel-mount retaining clip are supplied with each meter



For full details go to  
[www.murata-ps.com/rohs](http://www.murata-ps.com/rohs)

## Self-Powered LED Display, Negative Input DC Voltage Monitor

Dimensions in inches (millimeters)  
 Tolerances: 2 PL Dec  $\pm 0.02$  ( $\pm 0.51$ )  
 3 PL Dec  $\pm 0.010$  ( $\pm 0.254$ )  
 Recommended panel cutout dimensions:  
 1.336 (33.93)W  $\times$  0.838 (21.29)H  
 Internal corner radii 0.032 (0.81) Max.

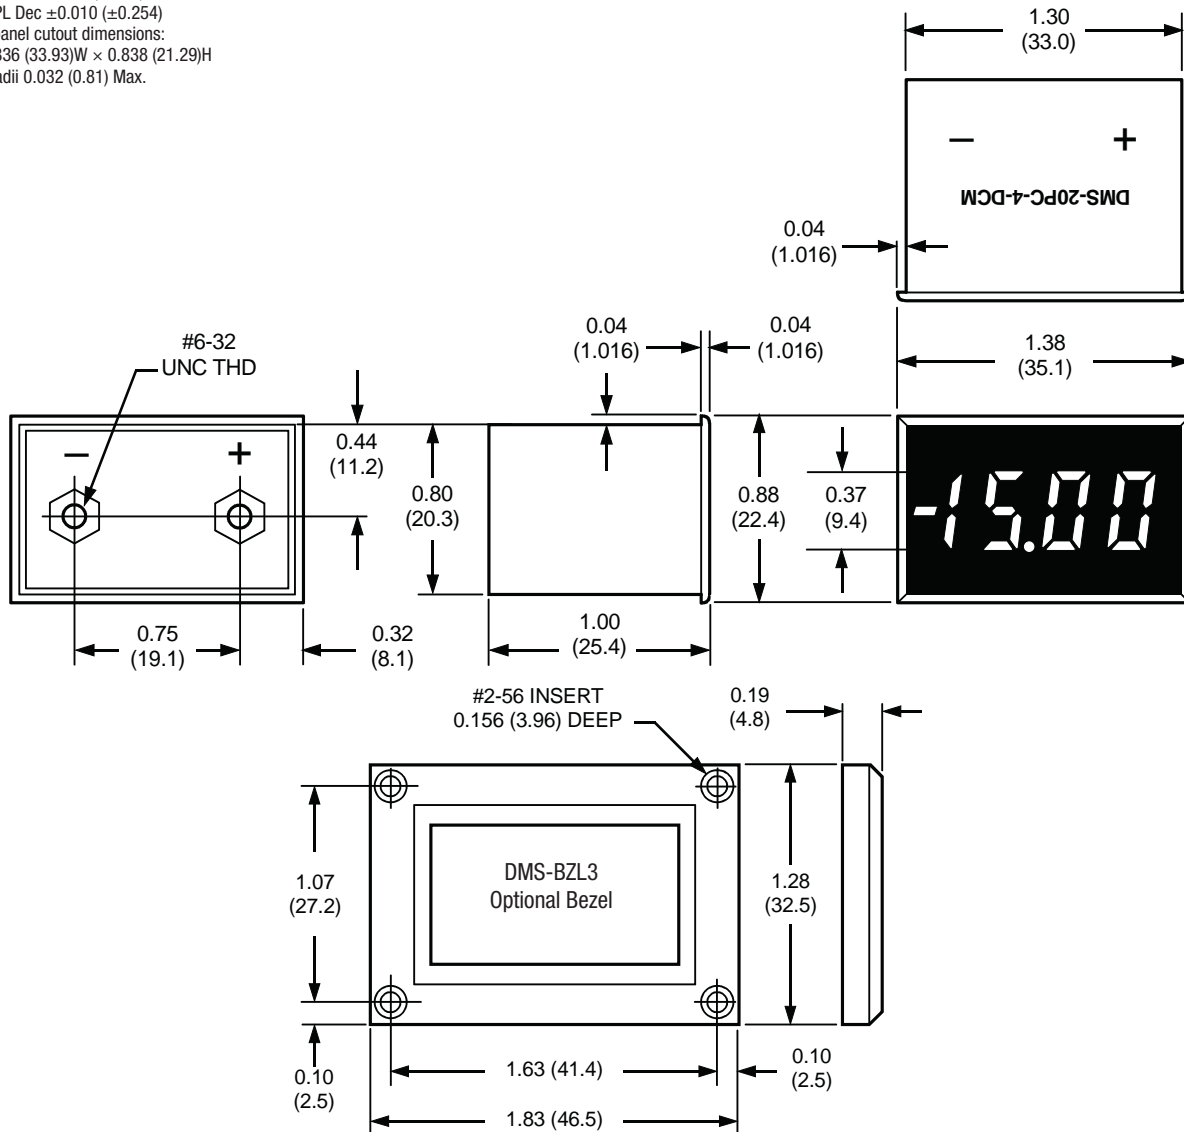

Murata Power Solutions, Inc.  
 11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A.  
 ISO 9001 and 14001 REGISTERED



**This product is subject to the following operating requirements and the Life and Safety Critical Application Sales Policy:**  
 Refer to: <http://www.murata-ps.com/requirements/>

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.  
 © 2016 Murata Power Solutions, Inc.