




## LA45-10X32:20-ZF

Ruland Adjustable Clamping Lever, Lever Length 45mm, Stud Thread #10X32, Stud Length 20mm, Zinc Lever, Steel Inserts

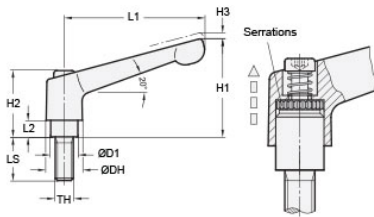


### Description

Ruland LA45-10X32:20-ZF is an adjustable clamping handle with a 45mm handle, 10X32 threaded stud, 20mm stud length, 10mm insert diameter, and 35mm overall height. The steel inserts combined with a zinc die-cast handle allow for use in heavy duty industrial applications. LA45-10X32:20-ZF has a textured finish on the handle making it easy for the user to grip in manufacturing environments with oil, coolant, or other lubricants. It is commonly found in packaging, printing, food processing, and manufacturing systems where conveyor rails, sensors, screens, and other components require frequent adjustments without the use of tools. The adjustable feature of this handle allows it to be used in confined spaces with limited hand access or where 360 degree rotation is not possible. Serrations connect the insert to the handle for easy disengagement. The user pulls the handle upwards by hand to disengage the serrations allowing it to be swiveled to the desired clamping position. Serrations automatically re-engage once the user releases the handle locking it in-place. A 10X32 threaded stud can replace existing hardware in an application or mate to an equivalently sized tapped hole for a quick installation. LA45-10X32:20-ZF is black to seamlessly integrate with the aesthetics of most equipment. It is manufactured by Otto Ganter, stocked by Ruland, and RoHS3 and REACH compliant.

### Product Specifications

Thread (TH)	#10-32 TPI	Stud Length LS	20 mm
Lever Length L1	45 mm	Overall Height H1	35 mm
Hub Height H2	24.5 mm	Hub Diameter DH	13 mm
Handle Disengagement Travel H3	3.5 mm	Sleeve Length L2	4 mm
Sleeve Diameter D1	10 mm	Handle Material	Zinc
Handle Color	Black	Insert and Screw Material	Steel
Insert and Screw Finish	Blackened	Weight (lbs)	0.081300
Manufacturer	JW Winco/ Otto Ganter	UPC	634529236321
Country of Origin	Germany	Tariff Code	8487.90.0080
UNSPC	31162807		

<b>Note 1</b>	Performance ratings are for guidance only. The user must determine suitability for a particular application.
<b>Prop 65</b>	 <b>WARNING</b> This product can expose you to chemicals including Soots, Benzene, Lead, and Nickel (metallic), known to the State of California to cause cancer, and Lead and Benzene known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .