




## LA92-1/2X13:32-ZS

Ruland Adjustable Clamping Lever, Lever Length 92mm, Stud Thread 1/2X13, Stud Length 32mm, Zinc Lever, Stainless Steel Inserts

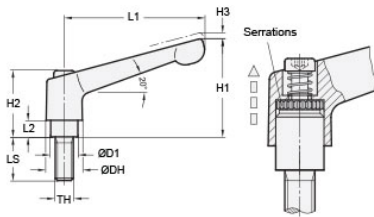

### Description

Ruland LA92-1/2X13:32-ZS is an adjustable clamping handle with a 92mm handle, 1/2X13 threaded stud, 32mm stud length, 19mm insert diameter, and 65mm overall height. The stainless steel inserts combined with a zinc die-cast handle allow for use in corrosive applications where durability is required. LA92-1/2X13:32-ZS has a textured finish on the handle making it easy for the user to grip in environments with water, coolant, chemicals, or other liquids. It is commonly found in packaging, printing, food processing, and manufacturing systems where conveyor rails, sensors, screens, and other components require frequent adjustments without the use of tools. The adjustable feature of this handle allows it to be used in confined spaces with limited hand access or where 360 degree rotation is not possible. Serrations connect the insert to the handle for easy disengagement. The user pulls the handle upwards by hand to disengage the serrations allowing it to be swiveled to the desired clamping position. Serrations automatically re-engage once the user releases the handle locking it in-place. A 1/2X13 threaded stud can replace existing hardware in an application or mate to an equivalently sized tapped hole for a quick installation. LA92-1/2X13:32-ZS is black to seamlessly integrate with the aesthetics of most equipment. It is manufactured by Otto Ganter, stocked by Ruland, and RoHS3 and REACH compliant.

### Product Specifications

|                                       |                 |                                  |                       |
|---------------------------------------|-----------------|----------------------------------|-----------------------|
| <b>Thread (TH)</b>                    | 1/2 in - 13 TPI | <b>Stud Length LS</b>            | 32 mm                 |
| <b>Lever Length L1</b>                | 92 mm           | <b>Overall Height H1</b>         | 65 mm                 |
| <b>Hub Height H2</b>                  | 43 mm           | <b>Hub Diameter DH</b>           | 24 mm                 |
| <b>Handle Disengagement Travel H3</b> | 4 mm            | <b>Sleeve Length L2</b>          | 11 mm                 |
| <b>Sleeve Diameter D1</b>             | 19 mm           | <b>Handle Material</b>           | Zinc                  |
| <b>Handle Color</b>                   | Black           | <b>Insert and Screw Material</b> | 303 Stainless Steel   |
| <b>Weight (lbs)</b>                   | 0.490800        | <b>Manufacturer</b>              | JW Winco/ Otto Ganter |
| <b>UPC</b>                            | 634529236949    | <b>Country of Origin</b>         | Germany               |
| <b>Tariff Code</b>                    | 8487.90.0080    | <b>UNSPC</b>                     | 31162807              |

**Note 1** Performance ratings are for guidance only. The user must determine suitability for a particular application.

**Prop 65**  **WARNING** This product can expose you to chemicals including Soots, Benzene, Lead, and Nickel (metallic), known to the State of California to cause cancer, and Lead and Benzene known to the State of California to cause birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).