



Connector Location A


Connector Location B

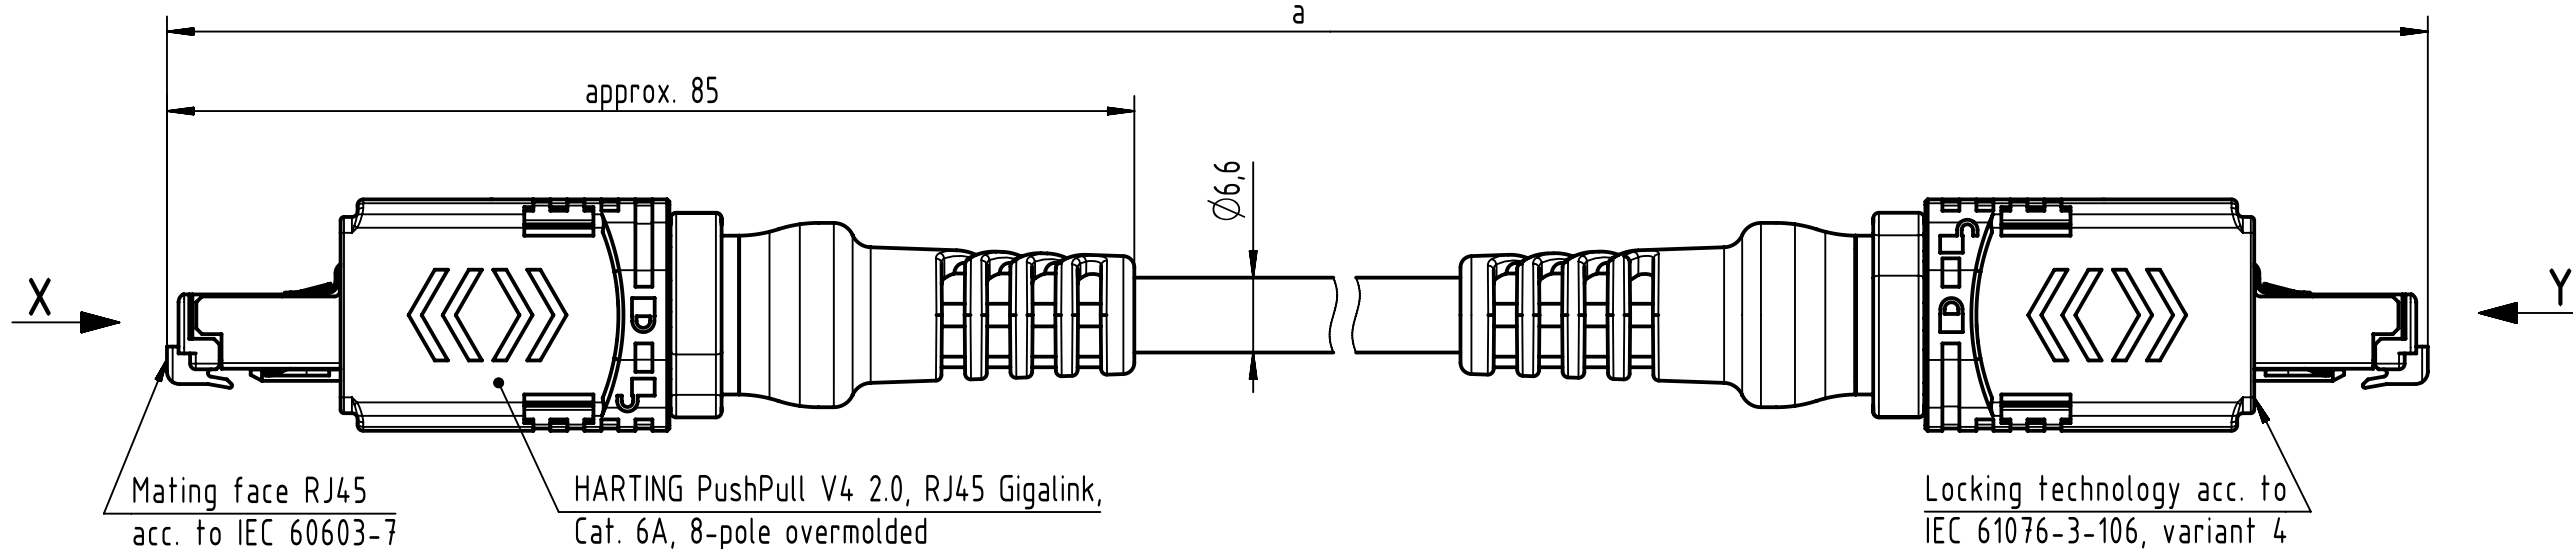

X
male

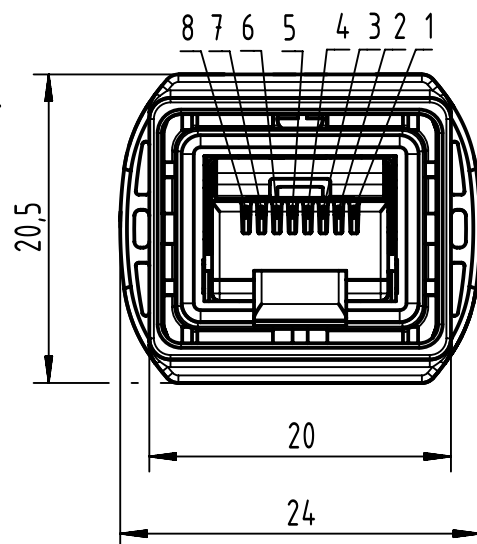


Y
male

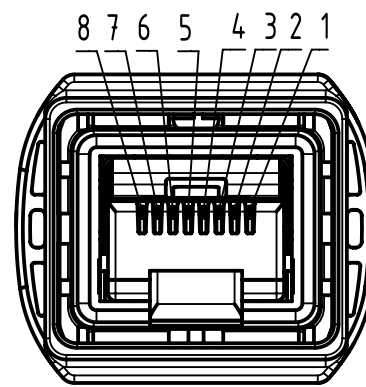

Shield

1	white/orange	1
2	orange	2
3	white/green	3
4	blue	4
5	white/blue	5
6	green	6
7	white/brown	7
8	brown	8

Y
male

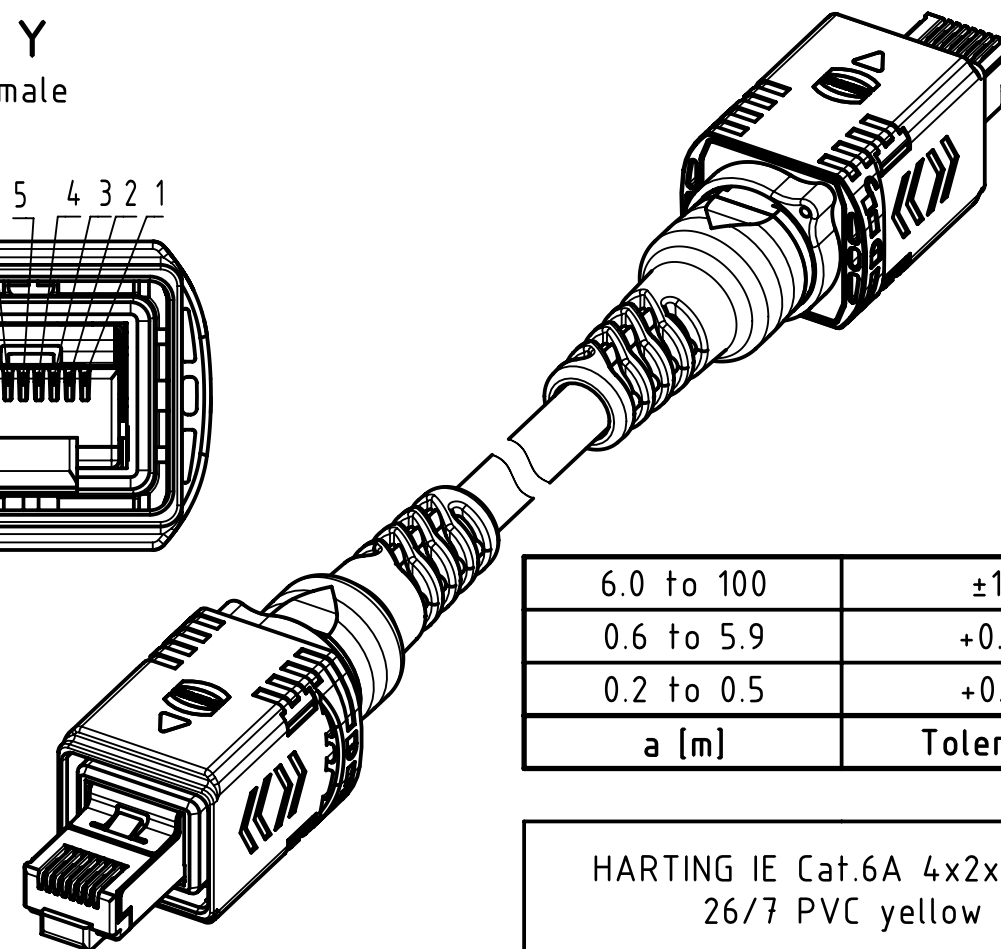

6.0 to 100	±1%
0.6 to 5.9	+0.04
0.2 to 0.5	+0.02
a [m]	Tolerance

length in "1m" step	100	XXX=000
	99	XXX=990
	12	XXX=120
	11	XXX=110
length in "0.1m" step	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	0.5	XXX=005
Step	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
	a [m]	XXX

NOTE:

- * Ethernet transmission possible for lengths up to 45m
- Protection level: IP65/67
- Temperature range:
 - Fixed installation: -20°C ... +80°C
 - Dynamic installation: -20°C ... +80°C

HARTING IE Cat.6A 4x2xAWG
26/7 PVC yellow

09482828757XXX

Type of cable

Part no.

All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing	
	All rights reserved	Created by 405181 Hadar	Inspected by 402676 Gross	Standardisation COSTEA Costea	Date 2021-11-12	State Final Release	
	Department HCS - RO	Title HA PPV4 2.0 RJ45 Cat6A PVC				Doc-Key / ECM-Nr. 100696504/UGD/001/E 500000205993	
HARTING Customised Solutions D-32339 Espelkamp		Type TB	Number 09482828757XXX			Rev. E	Page 1/1