


Data sheet | Item number: 756-1250/1023-010

ETHERNET cable; RJ45, axial locking; RJ45, axial locking; Cat. 6A; Length: 1 m




www.wago.com/756-1250/1023-010

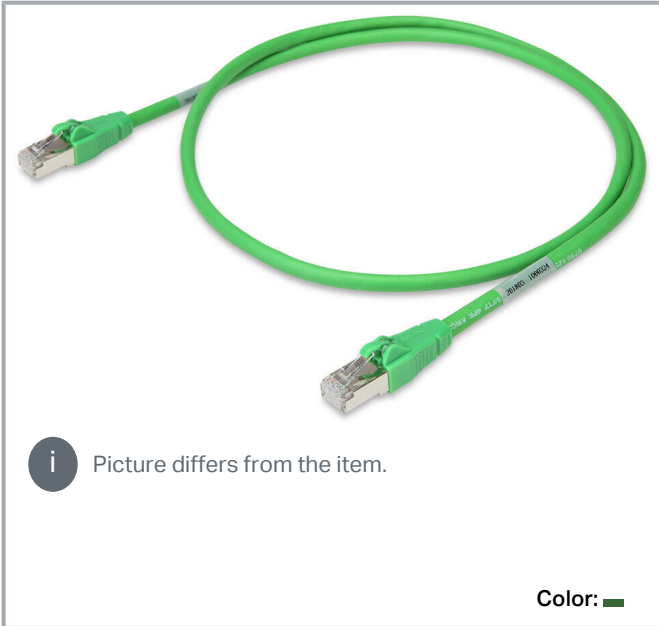


i Picture differs from the item.

Color: ■

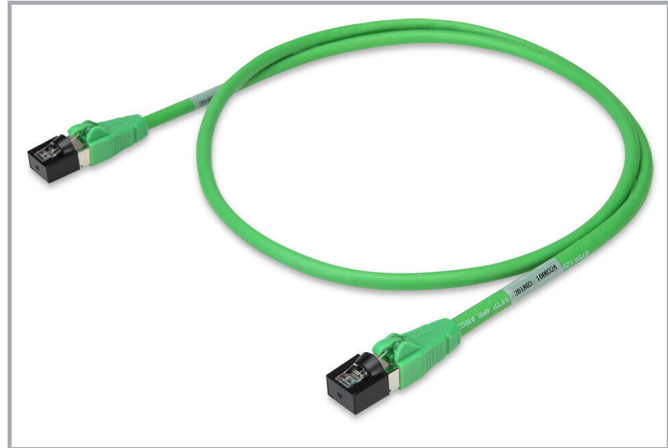

RJ-45-Stecker TIA/EIA 568B

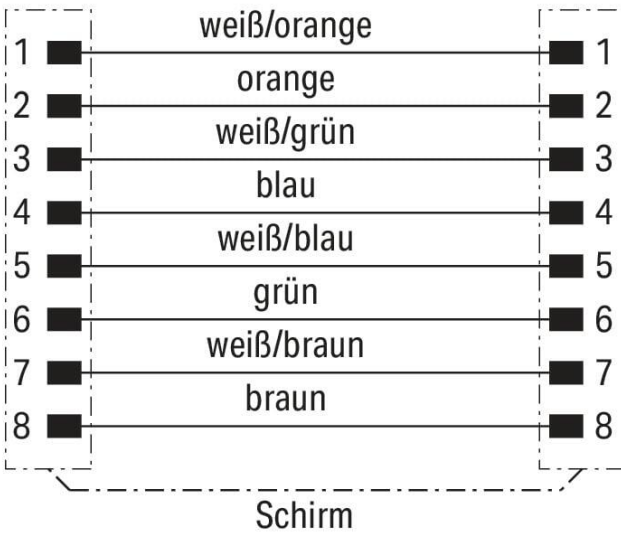

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Item description

Short description:

- Halogen-free TPE
- Cat. 6A S/FTP
- Highly flexible
- 50 µinch gold plating in the contact area
- Mechanically/electrically tested
- 4C Channel Link Test
- Wrap-around label for clear traceability
- Easy plug unlocking

Data

Technical data

Baud rate	10000Mbit/s
Operating voltage	80 V
Rated surge voltage	500 V (wire/wire/screen rms 50 Hz 1 min)
Insulation resistance	$\geq 1 \times 10^8 \Omega \times \text{km}$
Conductor resistance	$< 142 \Omega/\text{km}$
Cable length	1 m

Connection data

Contact type	Stecker RJ-45; Stecker RJ-45
Connection type	Stecker RJ-45 - Stecker RJ-45

Mechanical data

Conductor configuration	Cu-Litze blank (7 x 0,16 mm)
Conductor insulation	PE halogenfrei
Mating cycles (max.)	1,200
Sheathed cable diameter	6 ... 6.4 mm
Cable connection direction to mating direction	0°

Material data

Color	green
Contact material	CuZn

Subject to changes. Please also observe the further product documentation!



Contact plating	CuNi/Au, 50 µinch Goldauflage
Sheathed cable color	Grün, RAL 6018
Halogen-free	
Weight	56.2 g
Sheath material	LSOH-TPE, halogenfrei nach IEC 60754-2, flammwidrig nach IEC 60332-1, raucharm nach IEC 61034
Shield	Alukaschierte, überlappende Folie und verzinnertes Cu-Geflecht (PiMF)

Environmental requirements

Ambient (operating) temperature (dynamic)	-40 ... +80 °C
Ambient (operating) temperature (static)	-40 ... +80 °C
Bending radius	min. 10 mm
Bending cycles	8,500 Mio.

Commercial data

Packaging type	bag
Country of origin	CN
GTIN	4055143763059
Customs tariff number	85444290900

Technical data

Connection type	RJ-45 plug - RJ-45 plug
Cable connection direction to mating direction	
Cable length	
Baud rate	10000 Mbit/s
Operating voltage	80 V
Operating current	0.72 A
Rated surge voltage	500 V (wire/wire/shield rms 50 Hz 1 min)
Insulation resistance	$\geq 1 \times 10^8 \Omega/\text{km}$
Conductor resistance	< 142 Ω/km

Commercial data

eCl@ss 10.0	27-06-18-01
eCl@ss 9.0	27-06-18-01
ETIM 8.0	EC002599
ETIM 7.0	EC003249

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



ECCN	NO DATA
PU (SPU)	1 pcs
Packaging type	bag
Country of origin	
GTIN	
Customs tariff number	85444210000

Environmental requirements

Ambient (operating) temperature (dynamic)	-40 ... +80 °C
Ambient (operating) temperature (static)	-40 ... +80 °C

Mechanical data

Bending radius	10 mm (min.)
Bending cycles	
Sheathed cable color	green
Sheathed cable diameter	6 ... 6.4 mm
Sheath material	LSOH TPE, halogen-free per IEC 60754-2, flame-retardant per IEC 60332-1, low-smoke per IEC 61034
Halogen-free	Yes
Shield	Overlapped aluminum-laminated foil and tinned copper braid (PiMF)
Conductor configuration	Bare copper wire (7 x 0.16 mm)
Conductor insulation	Halogen-free PE
Contact material	
Contact plating	CuNi/Au; 50 µinch gold plating
Mating cycles (max.)	
Weight	56.2 g
Color	green

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Downloads

Documentation

Bid Text

756-1250/1023-010	2019 年2月19 日	xml	Download
X81 - Datei		4.6 kB	

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.



756-1250/1023-010

2019 年1月8日

docx
17.3 kB

Download

docx - Datei

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 756-1250/1023-010

URL

Download

ETHERNET cable; RJ45, axial locking; RJ45, axial locking; Cat. 6A; Length: 1 m

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.