


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 7101: DELETED WHT, GRN, LT GRY, YEL, CLEAR, PURP, PINK, ORG	10/10/13	D.FRISIELLO

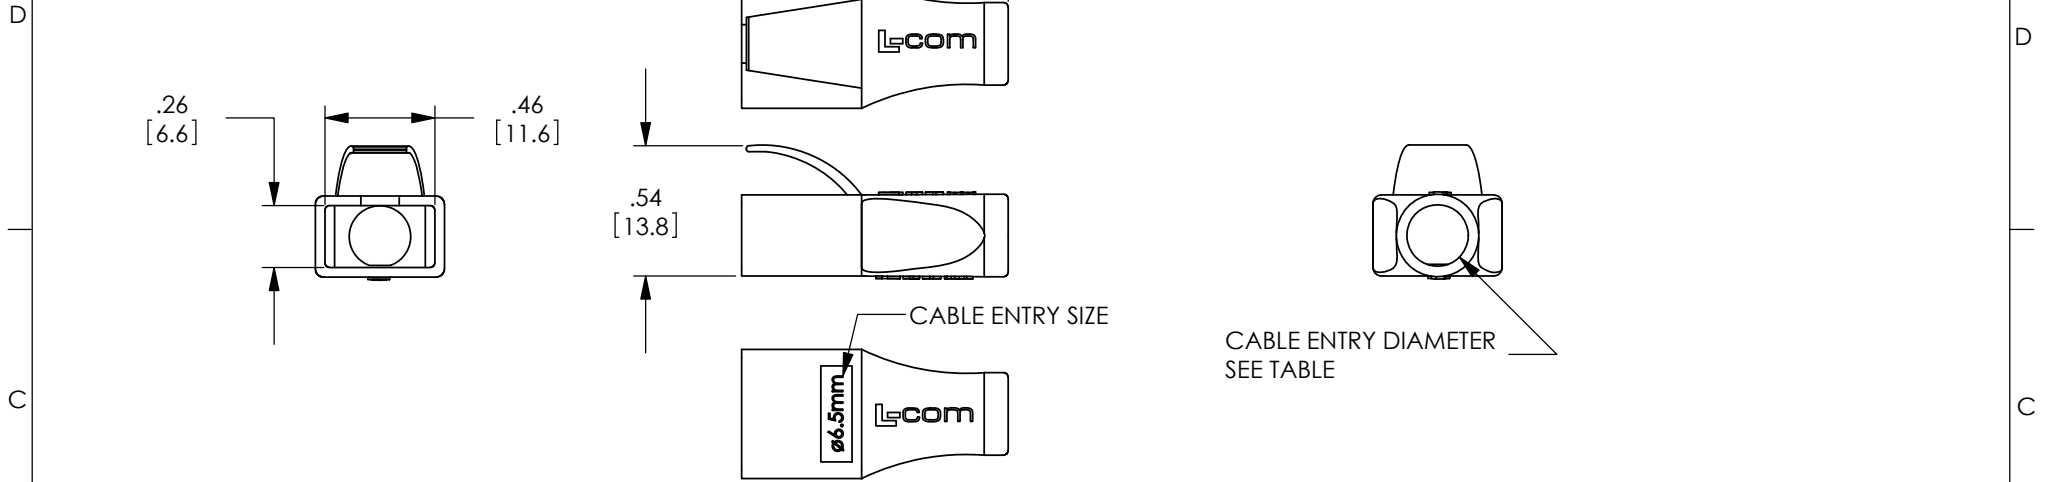

ENTRY (DIA.)	mm	4.5	5.0	5.5	6.0	6.5
	INCHES	0.177	0.197	0.217	0.236	0.256
BLACK		MPC45D45-BLK	MPC45D50-BLK	MPC45D55-BLK	MPC45D60-BLK	MPC45D65-BLK
BLUE		MPC45D45-BLU	MPC45D50-BLU	MPC45D55-BLU	MPC45D60-BLU	MPC45D65-BLU
RED		MPC45D45-RED	MPC45D50-RED	MPC45D55-RED	MPC45D60-RED	MPC45D65-RED
DK GRAY		MPC45D45-DGRY	MPC45D50-DGRY	MPC45D55-DGRY	MPC45D60-DGRY	MPC45D65-DGRY

△ E

NOTES:

1. BOOTS ARE PACKAGED 50 PIECES PER BAG.
2. FLAMMABILITY RATING: UL94V-0

REGULATORY COMPLIANCE:
CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY D. PARHAM	01/12/2009		CATEGORY TELECOM/MODULAR
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 .XX = ± .02 .XXX = ± .005	CHECKED BY M. MARTINEZ	01/13/2009	PRODUCT DESCRIPTION LSZH SNAGLESS BOOT	
PROJECTION 	APPROVED BY D. GALLAGHER	01/13/2009	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	SCALE: NONE
	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. MPC45D55
			CAD FILE: MPC45D55.SLDDRW	SHEET 1 OF 1