

# HPP V4 RJ45 Cat5 EI-PFT 8p, metal

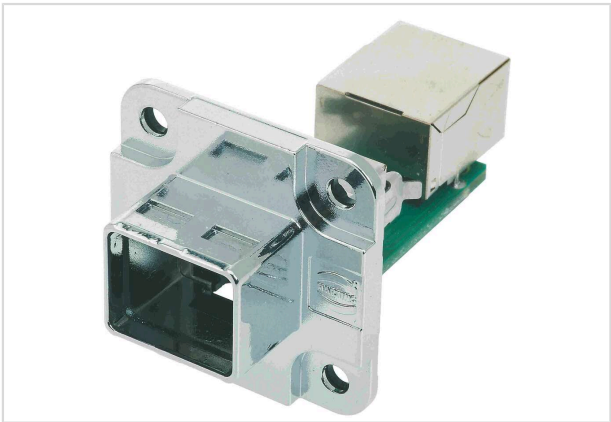


Image is for illustration purposes only. Please refer to product description.

Part number	09 45 295 1130
Specification	HPP V4 RJ45 Cat5 EI-PFT 8p, metal
HARTING eCatalogue	<a href="https://b2b.harting.com/09452951130">https://b2b.harting.com/09452951130</a>

## Identification

Category	Connectors
Series	HARTING PushPull (V4)
Identification	RJ45
Element	Panel feed trough set
Type of hood/housing	Bulkhead mounted housing
Description of hood/housing	Easy Install

## Version

Shielding	Fully shielded, 360° shielding contact
Number of contacts	5
Locking type	PushPull
Pack contents	incl. integrated seal, 2x RJ45-jack and board drillings for M3

## Technical characteristics

Transmission characteristics	Cat. 5 Class D up to 100 MHz
Data rate	10 Mbit/s
	100 Mbit/s
	1 Gbit/s
Limiting temperature	-40 ... +70 °C
Mating cycles	≥750
Degree of protection acc. to IEC 60529	IP65

## Material properties

Material (hood/housing)	Zinc die-cast
-------------------------	---------------



**Pushing Performance**  
Since 1945

## Material properties

Colour (hood/housing)	Silver
Material flammability class acc. to UL 94	V-0
RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Not contained
California Proposition 65 substances	Yes
California Proposition 65 substances	Lead
	Nickel

## Specifications and approvals

Specifications	IEC 61076-3-106 Variant 4 (V4)
Approvals	DNV GL

## Commercial data

Packaging size	1
Net weight	33.5 g
Country of origin	Romania
European customs tariff number	85366990
GTIN	5713140059931
ETIM	EC002636
eCl@ss	27440114 Rectangular connector (for field assembly)