




REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	MAY 07/18	L.CHAN

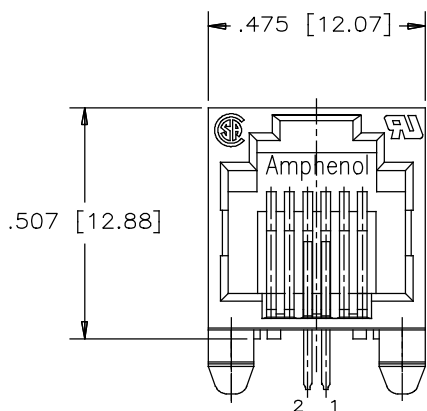

FRONT VIEW

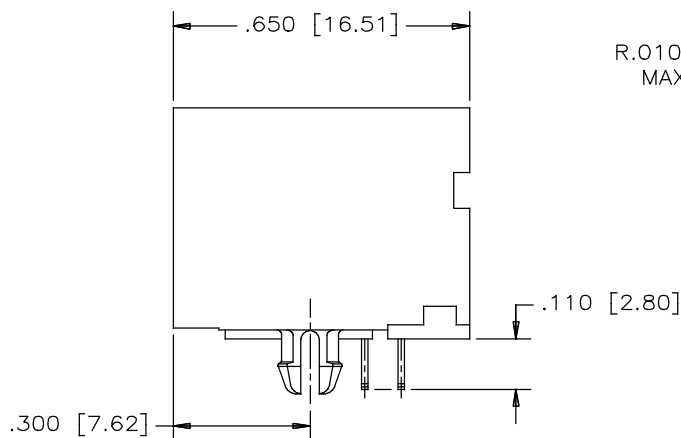

SIDE VIEW

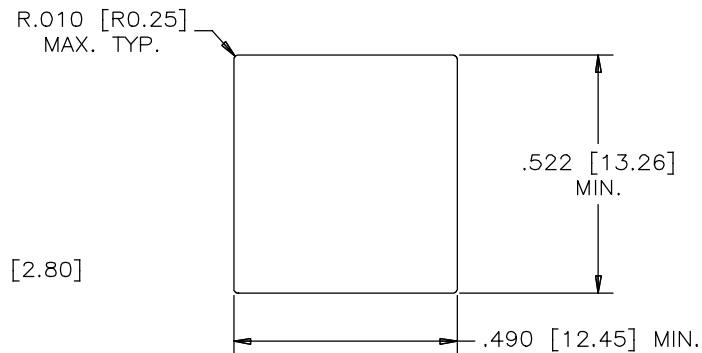

RECOMMENDED PANEL CUTOUT

MATERIALS:

PLASTIC HOUSING: HIGH TEMPERATURE RESISTANT NYLON
UL FLAMMABILITY 94V-0. COLOUR: BLACK.
SOLDER REFLOW PROCESS COMPATIBLE


CONTACT: PHOSPHOR BRONZE

CONTACT PLATING: SELECTIVE GOLD PLATING ON MATING SURFACES
SEE AMPHENOL PART NUMBER FOR DETAIL.
100 MICROINCHES [2.54 MICRONS] MINIMUM TIN ALLOY
ON CONTACT TAILS.

AMPHENOL PART NUMBER: RJE01-X20-01

GOLD PLATING

1 = 6 μ "
6 = 50 μ "
G = 15 μ "
J = 30 μ "

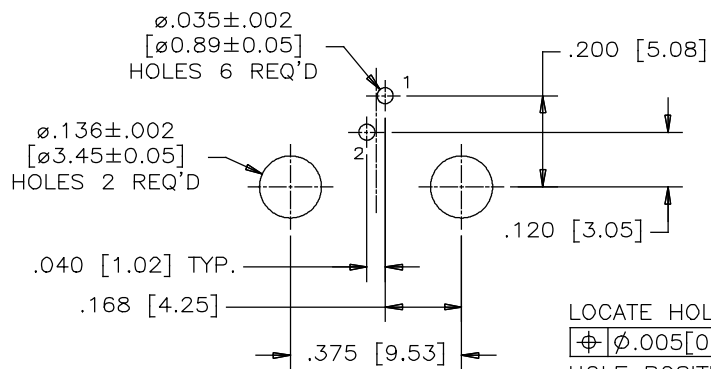

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)
TOLERANCE: ± 0.05 [.002]

LOCATE HOLES
 $\phi \phi.005$ [0.13]
HOLE POSITIONS
ARE BASIC



UNLESS SPECIFIED OTHERWISE		DRAWN <i>HANSON.C</i>	DATE <i>MAY 07/18</i>	Amphenol Canada Corp.	
PRIMARY UNITS INCH	CHECKED <i>L.CHAN</i>			www.amphenolcanada.com	
SECONDARY MILLIMETER	M.E. APP'D			TITLE	
REFERENCE IN PARENTHESES	Q.A. APP'D			HIGH SPEED MODULAR JACK SINGLE PORT, 6 POSITIONS, 2 CONTACTS, WITHOUT SHIELD - RoHS COMPLIANT	
GENERAL TOLERANCES		DWG APPR.		DWG. NO.	
1 DECIMAL PLACE ± 0.020	ENG. REL. NO.			P-RJE01-X20-01	
2 DECIMAL PLACES ± 0.015	REF.			REV	
3 DECIMAL PLACES ± 0.010	THIRD ANGLE PROJECTION			A	
ANGULAR DEGREES $\pm 1.0^\circ$	DO NOT SCALE DRAWING			CODE ID NO. 03554 DWG SIZE: C SCALE: N/A SHEET 1 OF 1	