




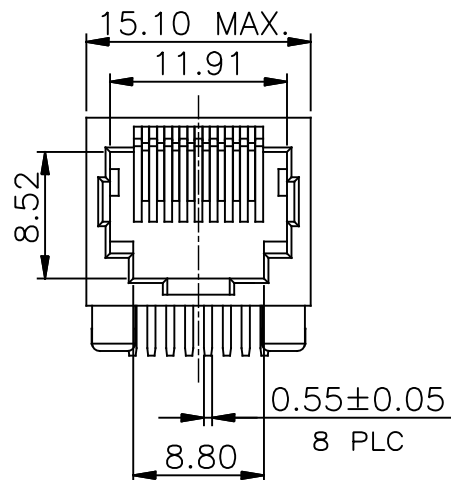


FRONT VIEW

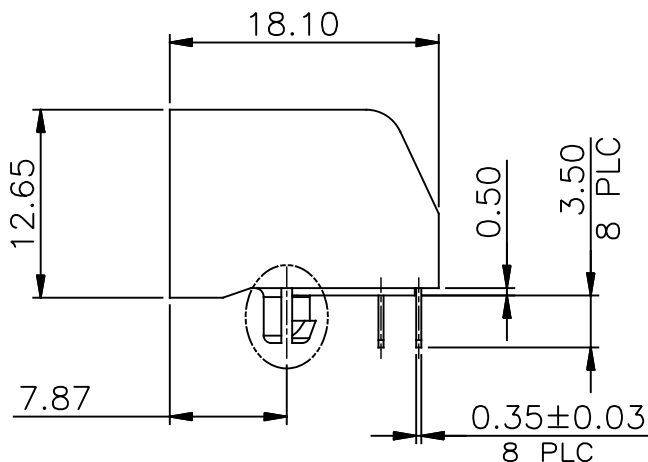

SIDE VIEW

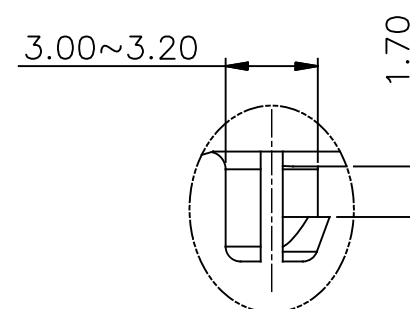

DETAIL Z
SCALE 2:1

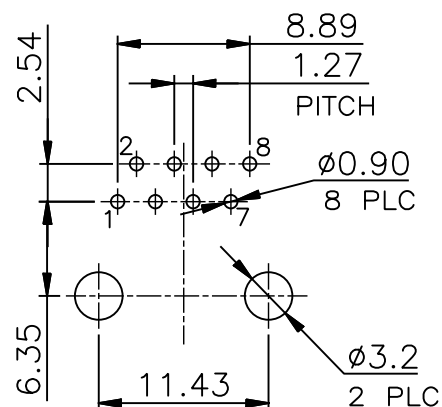


RECOMMENDED PCB LAYOUT



LOCATE HOLES

$\phi 0.005 [0.13]$

POSITION DIMENSIONS
ARE BASIC

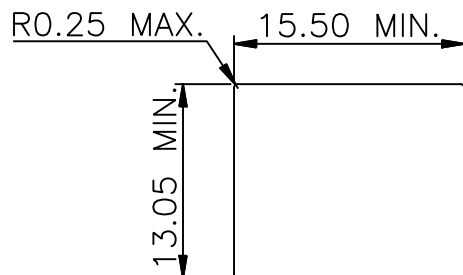

RECOMMENDED PANEL CUTOUT

1. MATERIALS:

HOUSING:HIGH TEMP, ENGINEERING THERMOPLASTIC,COLOUR: BLACK,
FLAMMABILITY RATING UL 94V-0

CONTACTS:PHOSPHOR BRONZE

PLATING: REFER TO PART NUMBER FOR GOLD
THICKNESS ON MATING SURFACES.
50 μ " [1.27 MICRONS] MIN. NICKEL UNDERPLATE
GOLD FLASH TIN ON CONTACT TAILS.

AMPHENOL PART NUMBER: RJE03-188-0X10-H

1 = 06u" GOLD
2 = 15u" GOLD
3 = 30u" GOLD
4 = 50u" GOLD

UNLESS SPECIFIED OTHERWISE				Amphenol Canada Corp.	
PRIMARY UNITS	MILLIMETER	DRAWN	G.HSIA	DATE	MAR.08.12
SECONDARY	INCH	CHECKED	L.CHAN	DATE	MAR.08.12
REFERENCE IN PARENTHESES		M.E. APP'D		TITLE MODULAR JACK, 8 POSITION, 8 CONTACTS, WITHOUT SHIELD HIGH TEMPERATURE - RoHS COMPLIANT	
GENERAL TOLERANCES		Q.A. APP'D			
1 DECIMAL PLACE	±0.30	DWG APPR.			
2 DECIMAL PLACES	±0.25	ENG. REL. NO.			
3 DECIMAL PLACES	±0.20	REF.		DWG. NO.	P-RJE03-188-0X10-H
ANGULAR DEGREES	±1.0°	THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	
				CODE ID NO. 03554	DWG SIZE: C
				SCALE: N/A	SHEET 1 OF 1