

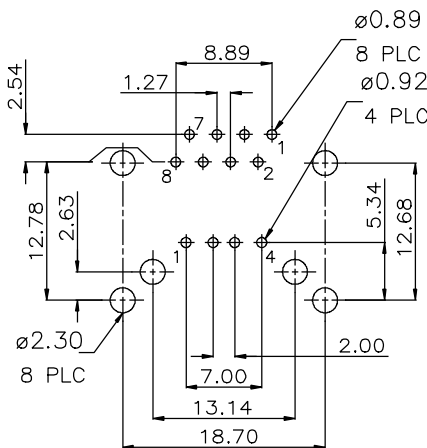


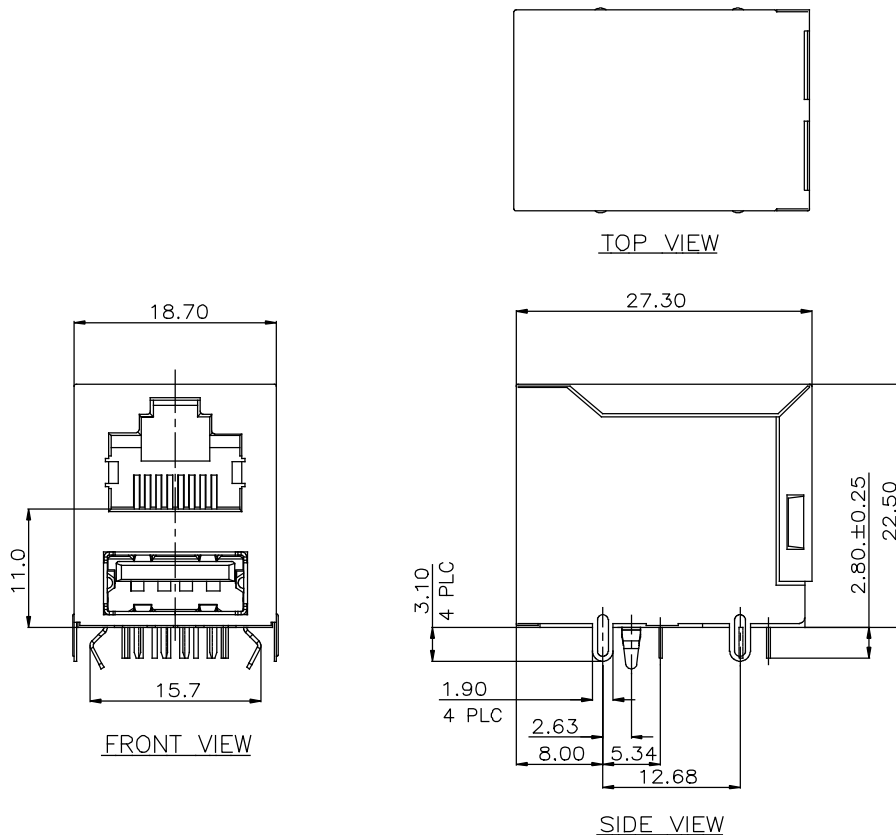

LOCATE HOLES
[0.13][.005]
POSITION DIMENSIONS
ARE BASIC

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)
TOLERANCE: ±0.05

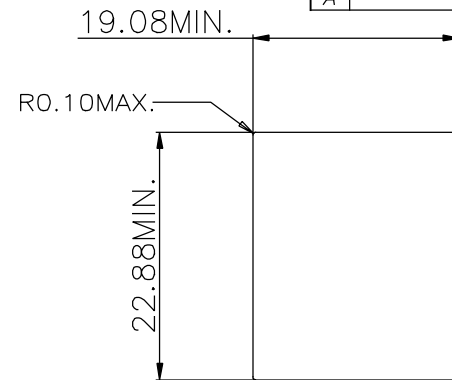

RECOMMENDED PANEL CUTOUT

MATERIALS:

RJ:

HOUSING & COVER: ENGINEERING THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0, COLOUR: BLACK

CONTACTS: PHOSPHOR BRONZE

PLATING: SELECTIVE GOLD PLATING ON MATING SURFACES
SEE AMPHENOL PART NUMBER FOR DETAIL.

50 μ" [1.27 MICRONS]

MIN. NICKEL UNDERPLATE

GOLD FLASH ON CONTACT TAILS.

SHIELD: BRASS PLATED WITH NICKEL.

USB:

HOUSING: ENGINEERING THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0,
COLOUR: BLACK

CONTACTS: PHOSPHOR BRONZE

PLATING: SELECTIVE GOLD FLASH ON MATING SURFACES

50 μ" [1.27 MICRONS]

MIN. NICKEL UNDERPLATE

100 μ" TIN PLATING ON CONTACT TAILS

SHIELD: BRASS PLATED WITH NICKEL.

AMPHENOL PARTNUMBER: RJE36-188-2X03

GOLD PLATING
0 = GOLD FLASH
1 = 6 μ INCH
2 = 15 μ INCH
3 = 30 μ INCH
4 = 50 μ INCH

UNLESS SPECIFIED OTHERWISE		DRAWN <i>HANSON.C</i>	DATE <i>SEP 03/18</i>	Amphenol Canada Corp. Commercial Products	
PRIMARY UNITS	MILLIMETER	CHECKED <i>AMY.Z</i>	<i>SEP 03/18</i>		
SECONDARY		M.E. APP'D		TITLE RJ45 OVER SINGLE USB 2.0 COMBO, DIP TYPE WITHOUT TABS AND LEDS -RoHS COMPLIANT	
REFERENCE IN PARENTHESES		Q.A. APP'D			
GENERAL TOLERANCES		DWG APPR. <i>L.CHAN</i>	<i>SEP 03/18</i>	DWG. NO.	P-RJE36-188-2X03
1 DECIMAL PLACE	±0.30	ENG. REL. NO.			
2 DECIMAL PLACES	±0.25	REF.			REV A
3 DECIMAL PLACES	±0.20	THIRD ANGLE PROJECTION			
ANGULAR DEGREES	±1.0°	DO NOT SCALE DRAWING			
		CODE ID NO. 03554	DWG SIZE: C	SCALE: N/A	SHEET 1 OF 1