
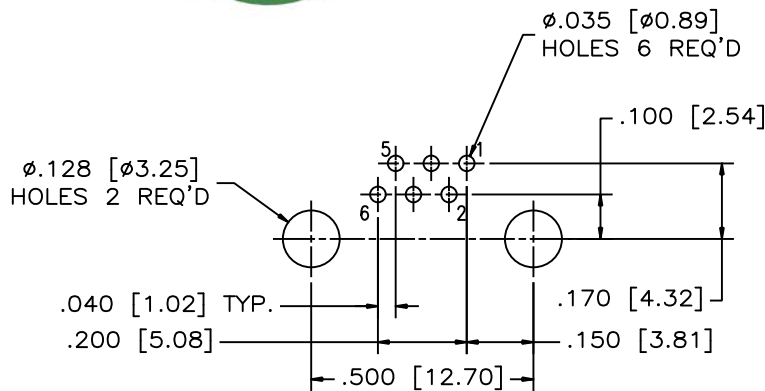
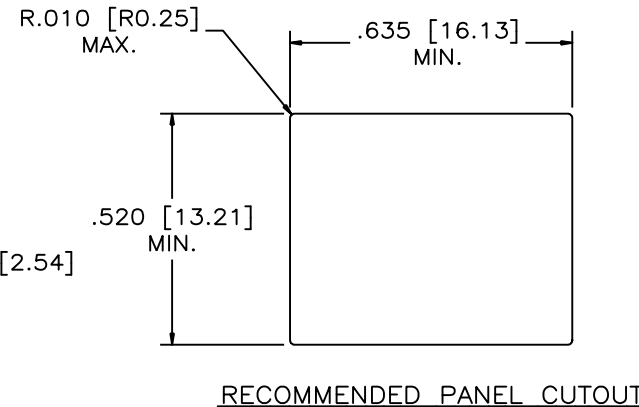
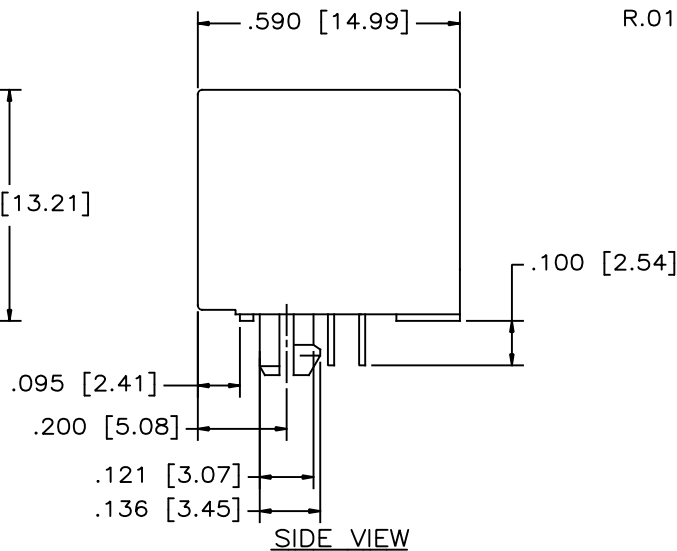


REVISIONS			
REV	DESCRIPTION, EGN, EAR NO.	DATE	APP'D
A	PROPOSAL	MYA11/17	L.CHAN
B	ADD THE BOARD LOCK DIMENSION	AUG 25/20	L.CHAN

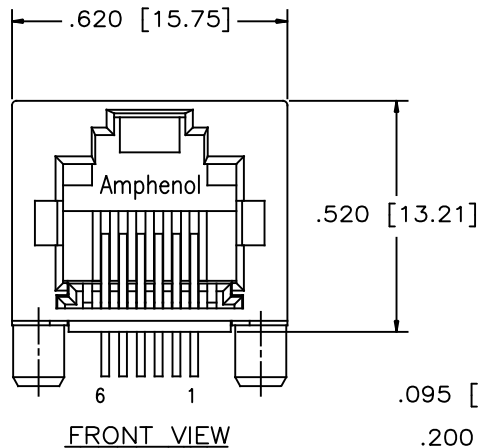

LOCATE HOLES  
 $\varnothing \phi .005 [0.13]$   
 POSITION DIMENSIONS  
 ARE BASIC

**MATERIALS:**

PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC  
 FLAMMABILITY RATING UL 94V-0

**CONTACTS:**

PHOSPHOR BRONZE  
 PLATING: 50 μ" [1.27 MICRONS]  
 MIN. GOLD ON MATING SURFACES.  
 50 μ" [1.27 MICRONS]  
 MIN. NICKEL UNDERPLATE  
 100 μ" [2.54 MICRONS]  
 MIN. MATTE-TIN ON CONTACT TAILS.

**RECOMMENDED SOLDERING TEMPERATURE:**

WAVE SOLDERING AT 260° MAXIMUM FOR 5 SEC MAXIMUM.

**PART NUMBER: RJHSE-7060**

UNLESS SPECIFIED OTHERWISE	DRAWN	W.QIU	MAY11/17
PRIMARY UNITS INCHES	CHECKED	L.CHAN	MAY11/17
SECONDARY MILLIMETERS	M.E. APP'D		
REFERENCE IN PARENTHESES	Q.A. APP'D		
1 DECIMAL PLACE	DWG APP'D		
2 DECIMAL PLACES	ENG. REL. NO.		
3 DECIMAL PLACES ±0.015	REF.		
ANGULAR DEGREES	THIRD ANGLE PROJECTION		

Amphenol Canada Corp.  
 Commercial Products

HIGH SPEED MODULAR JACK,  
 6 POSITIONS, 6 CONTACTS,  
 WITHOUT SHIELD - RoHS COMPLIANT

DWG NO.	P-RJHSE-7060	REV	B
CODE ID NO. 03554	DWG SIZE	SCALE	SHEET 1 OF 1