




REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	JUN05/19	L.CHAN

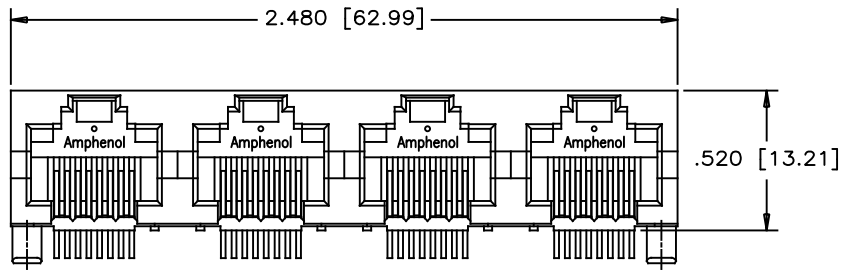

FRONT VIEW

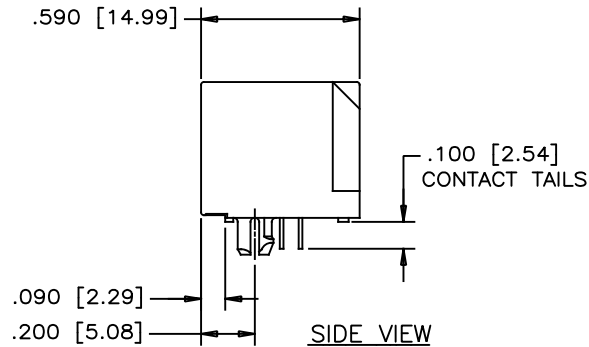

SIDE VIEW

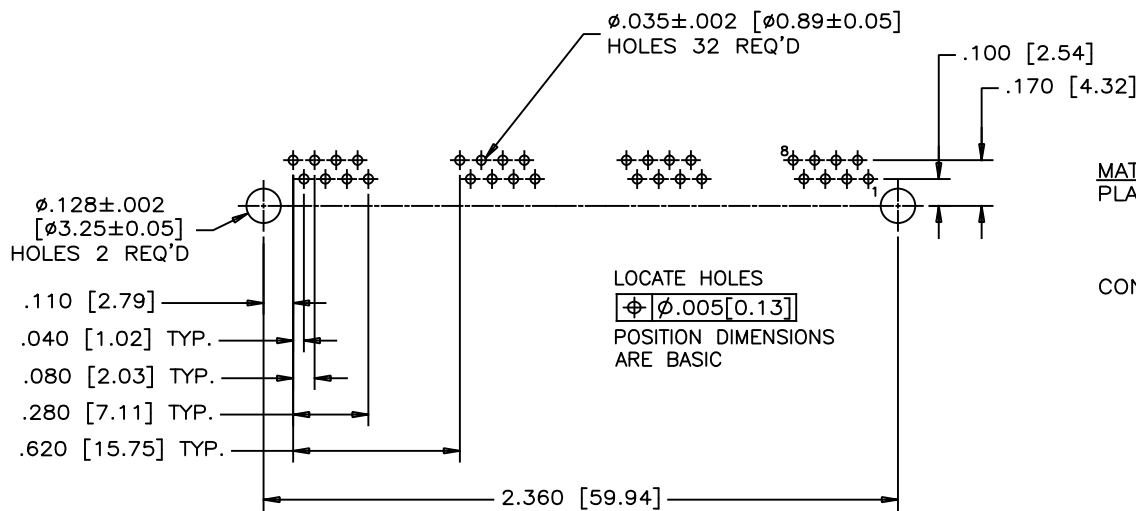

RECOMMENDED P.C.B. LAYOUT  
(COMPONENT SIDE OF BOARD)

**MATERIALS:**

PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC  
FLAMMABILITY RATING UL 94V-0,  
COLOR BLACK

**CONTACTS:**


PHOSPHOR BRONZE  
PLATING: GOLD PLATING ON MATING SURFACE.  
[SEE PART NUMBER FOR THICKNESS]  
50 μ" [1.27 MICRONS]  
MIN. NICKEL UNDERPLATE  
100 μ" [2.54 MICRONS]  
MIN. MATTE TIN ON CONTACT TAILS.

RECOMMENDED SOLDERING TEMPERATURE:  
WAVE SOLDERING AT 260°C MAXIMUM FOR  
5 SEC MAXIMUM.

PART NUMBER: RJHSE-X080-04

GOLD PLATING

- E=RJ45 FLAT CONTACT 6u"
- G=RJ45 FLAT CONTACT 15u"
- J=RJ45 FLAT CONTACT 30u"
- 5=RJ45 FLAT CONTACT 50u"

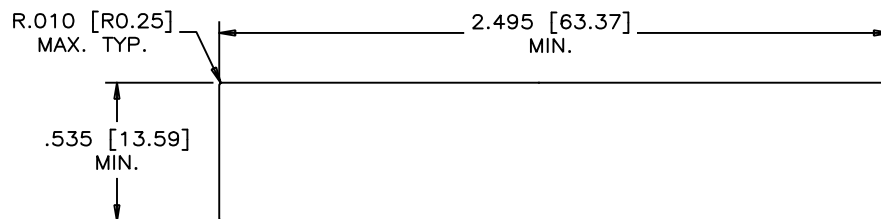

RECOMMENDED PANEL CUTOUT

UNLESS SPECIFIED OTHERWISE		DRAWN W.QIU	DATE JUN05/19	Amphenol Canada Corp. Commercial Products
PRIMARY UNITS INCH	CHECKED L.CHAN		JUN05/19	
SECONDARY MILLIMETER	M.E. APP'D			TITLE
REFERENCE IN PARENTHESES	Q.A. APP'D			4 PORT, HIGH SPEED, MODULAR JACK, 8 POSITION, 8 CONTACTS, W/O SHIELD, W/O LED - RoHS COMPLIANT
GENERAL TOLERANCES	DWG APPR.			DWG. NO.
1 DECIMAL PLACE ±0.025	ENG. REL. NO.			P-RJHSE-X080-04
2 DECIMAL PLACES ±0.020	REF.			REV
3 DECIMAL PLACES ±0.015	THIRD ANGLE PROJECTION			A
ANGULAR DEGREES ±1.0°	DO NOT SCALE DRAWING			CODE ID NO. 03554   DWG SIZE: C   SCALE: N/A   SHEET 1 OF 1