
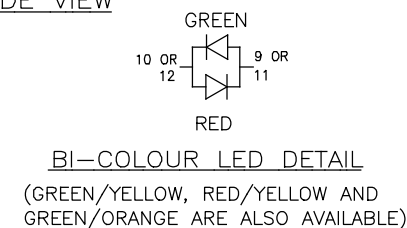
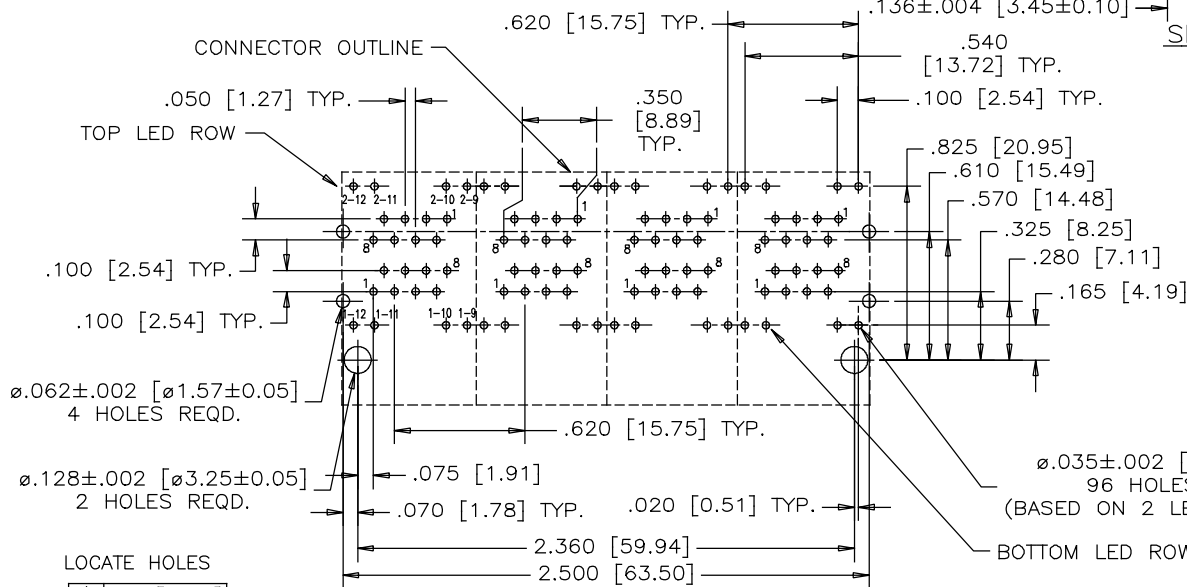
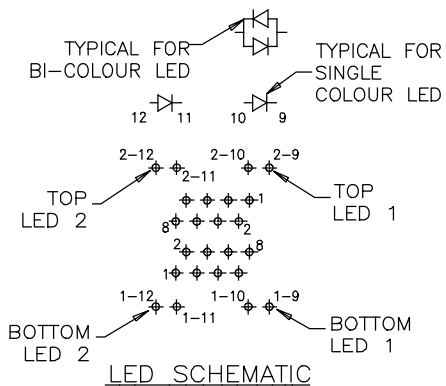

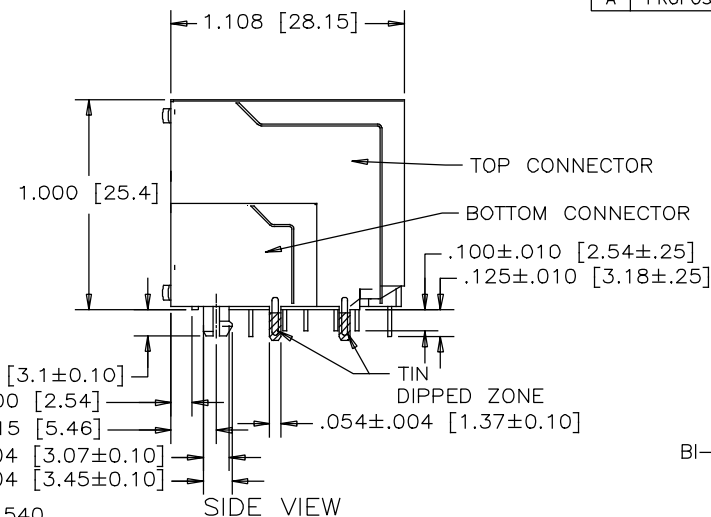


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL DRAWING	JUN 02/18	L.CHAN

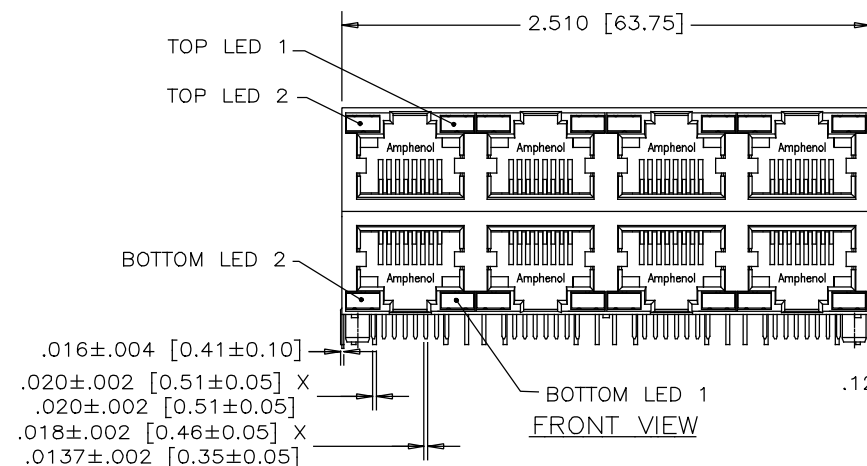

MATERIALS:

HOUSING: ENGINEERING THERMOPLASTIC.
FLAMMABILITY RATING UL 94V-0

CONTACTS: PHOSPHOR BRONZE
PLATING: SELECTIVE GOLD PLATING ON MATING SURFACES. SEE PART NO. FOR THICKNESS.
50µ" [1.27 MICRONS] MIN. NICKEL UNDERPLATE.
100µ" [2.54 MICRONS] MIN. MATTE TIN OR GOLD FLASH ON CONTACT TAILS.

SHIELD: COPPER ALLOY
PLATING: NICKEL WITH TIN DIPPED PCB TAIL.

UNLESS OTHERWISE SPECIFIED, THE TOLERANCE IS ±0.015[±0.38]

PART NUMBER: RJSAE-XF8X-08X


GOLD PLATING OPTION: REFER TO LED OPTIONS DRAWING FOR ORDERING CODES

D=6u" GOLD PLATING

G=15u" GOLD PLATING

J=30u" GOLD PLATING

S=50u" GOLD PLATING

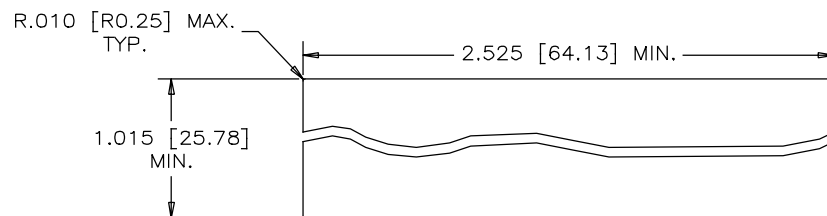

UNLESS SPECIFIED OTHERWISE		DRAWN	HANSON.C	JUN02/18	Amphenol Canada Corp. Commercial Products	
PRIMARY UNITS	INCHES	CHECKED	AMY.Z	JUN02/18		
SECONDARY	MILLIMETERS	M.E. APP'D			TITLE STACKABLE MULTI-PORT MODULAR JACK, 8 POS. 8 CONTACTS, 2 LEDS PER PORT, SHIELDED WITHOUT TABS -RoHS COMPLIANT	
REFERENCE IN PARENTHESES		Q.A. APP'D				
1 DECIMAL PLACE		DWG APP'D			DWG NO. P-RJSAE-XF8X-08X	
2 DECIMAL PLACES		ENG. REL. NO.				
3 DECIMAL PLACES		REF.			REV A	
ANGULAR DEGREES ±1.5°		THIRD ANGLE PROJECTION				
		DO NOT SCALE DRAWING			CODE ID NO. 03554 DWG SIZE SCALE SHEET 1 OF 1	

