




REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	SEP23/19	L.CHAN

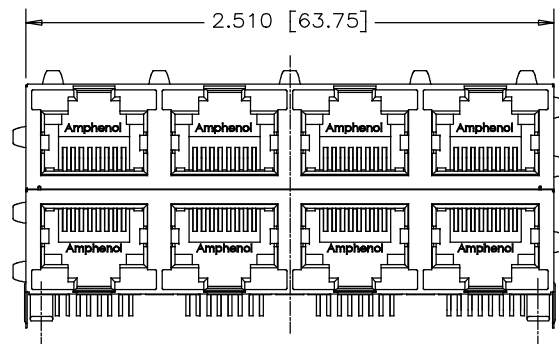


FRONT VIEW

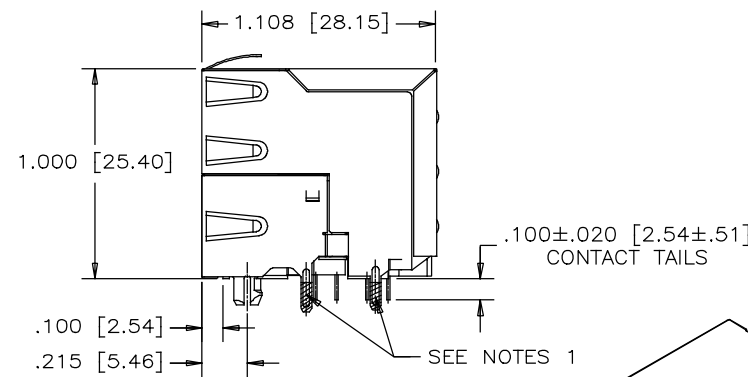

SIDE VIEW

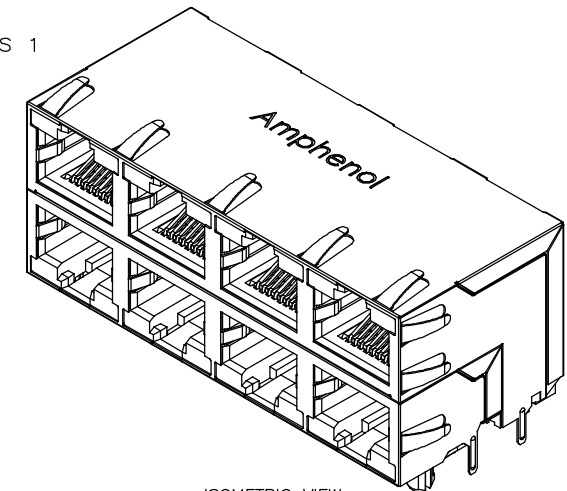

ISOMETRIC VIEW

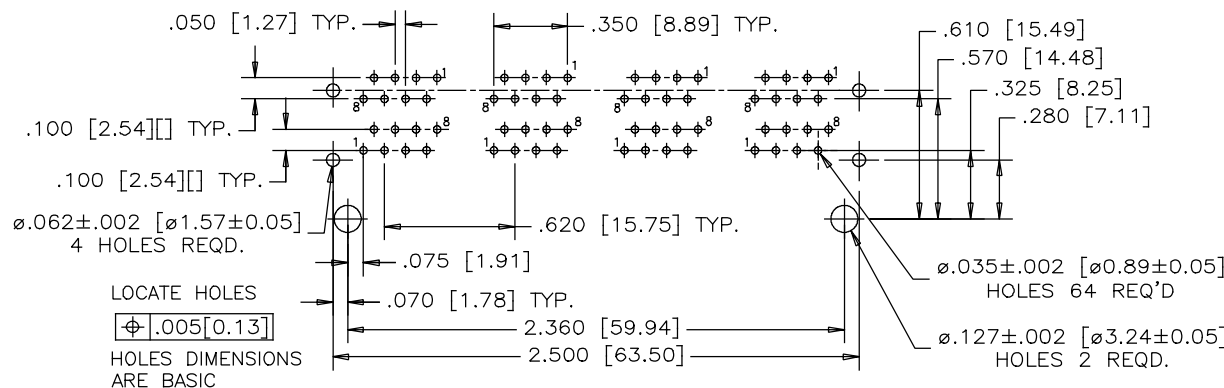

RECOMMENDED P.C.B LAYOUT
(COMPONENT SIDE OF BOARD)

NOTES:

1. MATERIALS:

CONTACTS: PHOSPHOR BRONZE, SELECTIVE GOLD PLATING ON MATING SURFACES SEE PART NO. FOR THICKNESS. 50 MICROINCHES MIN. NICKEL OVERALL. 100 MICROINCHES MIN. MATTE TIN OR GOLD FLASH ON TAILS.

HOUSING: ENGINEERING PLASTIC. FLAMMABILITY RATING UL 94V-0, BLACK


SHIELD: COPPER ALLOY. PLATING: NICKEL WITH TIN FINISHED ON PCB TAILS.

2. RECOMMENDED SOLDERING TEMPERATURE:

WAVE SOLDERING PEAKED AT 260°C FOR 10 SEC MAXIMUM

AMPHENOL PART NO.: RJSAE-X380-08

GOLD PLATING OPTION:
 D=6u" GOLD PLATING
 G=15u" GOLD PLATING
 J=30u" GOLD PLATING
 5=50u" GOLD PLATING

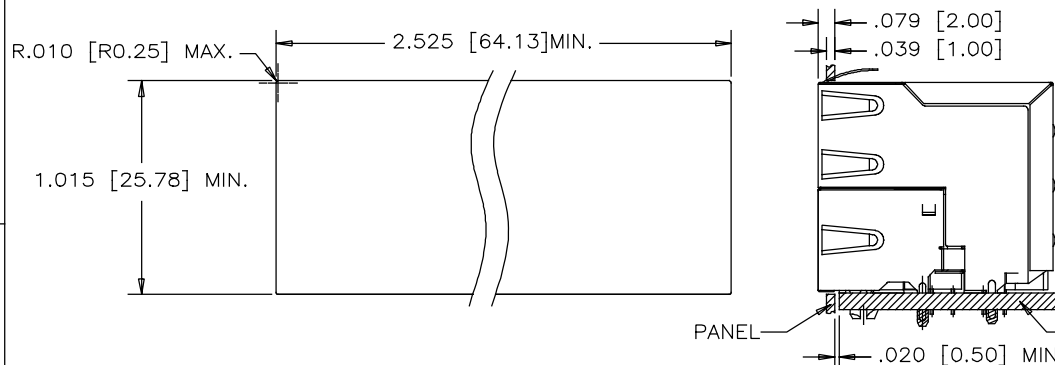

RECOMMENDED PANEL CUTOUT

UNLESS SPECIFIED OTHERWISE		DRAWN	RONNIE.C	OCT29/19	Amphenol Canada Corp. Commercial Products	
PRIMARY UNITS	INCHES	CHECKED	KELVIN.T	OCT29/19		
SECONDARY	MILLIMETERS	M.E. APP'D			STACKABLE MULTI-PORT MODULAR JACK, 8 POS. 8 CONTACTS, WITHOUT LED, SHIELDED, .100INCH CONTACT TAILS -RoHS COMPLIANT	
REFERENCE IN PARENTHESES		Q.A. APP'D				
GENERAL TOLERANCES		DWG APP'D			DWG NO. P-RJSAE-X380-08	
1 DECIMAL PLACE		ENG. REL. NO.				
2 DECIMAL PLACES		REF.			REV A	
3 DECIMAL PLACES	±.015					
ANGULAR DEGREES	±1.5°	THIRD ANGLE PROJECTION			CODE ID NO. 03554 DWG SIZE X SCALE N/A SHEET 1 OF 1	