
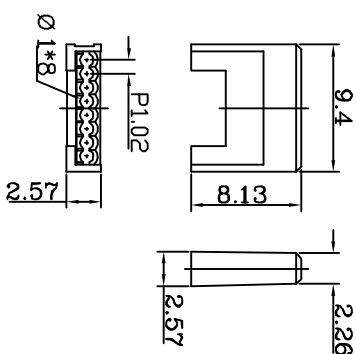

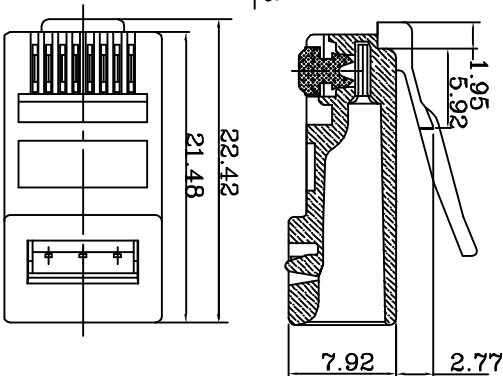





REV	DATE	MODIFICATION	DRAWN
1	2013/09/05		

SPECIFICATIONS
1. ELECTRICAL:
UL APPLICATIONS: 250 VOLTS AC MAX., AT 2 AMPS.
DIELECTRIC WITHSTANDING VOLTAGE: 500 VOLTS AC.
INSULATION RESISTANCE: 100M Ω.
HEMATATION: RESISTANCE: 20m Ω MAX AFTER
ENVIRONMENTAL TESTING.
2. MECHANICAL:
CABLE-TO-PLUG TENSILE STRENGTH: 196NCS MIN.
DURABILITY: 200 MATING CYCLES.
3. MATERIAL & FINISH:
HOUSING: POLYCARBONATE: UL 94V-0 OR UL 94V-2
COLOR: TRANSPARENT OR OTHER COLOR ARE AVAILABLE.
CONTACT: COPPER ALLOY.
CONDUCTOR: SOLID WIRE, 24AWG, 26 AWG.
GOLD PLATING: 50μ"

BLADE:	B
Drawing	
Mark	

		Quest Technology International, Inc.	
11200 NW 138th St. Medley, FL 33178			
DIMENSION IN mm (inch)	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL	FIG NO.
.X±0.20	.X°±5°	PC	NMP-8625
.XX±0.10	.XX°±2°	TITLE	
.X°±5°		CAL-08 MODULAR PLUG BRPC FOR ROUND CABLE.	
.XX°±2°		STANDARD WIRE WITH INSERT	
APPROVAL	CHECKED	DRAWN	SCALE
Cathyli	2/1	1/1	1/1
角法	角法	角法	角法
角法	角法	角法	角法

1

2

3

4

5

6

7

ST-DR-009A