SIEMENS

Data sheet US2:18DUE92NL



Non-reversing motor starter Size 1 Three phase full voltage Solid-state overload relay OLRelay amp range 10-40a 240V 50HZ / 277V 60HZ coil Combination type 30Amp circuit breaker Enclosure NEMA type 4/12 Water/dust tight for outdoors Standard width enclosure

product brand name	Class 18 & 26
design of the product	Full-voltage non-reversing motor starter with motor circuit protector
special product feature	ESP200 overload relay
General technical data	
Height x Width x Depth [in]	24 × 11 × 8 in
touch protection against electrical shock	NA for enclosed products
installation altitude [ft] at height above sea level maximum	6560 ft
ambient temperature [°F]	
during storage	-22 +149 °F
during operation	-4 +104 °F
ambient temperature	
during storage	-30 +65 °C
 during operation 	-20 +40 °C
Horsepower ratings	
yielded mechanical performance [hp] for 3-phase AC motor	
 at 200/208 V rated value 	7.5 hp
• at 220/230 V rated value	7.5 hp
 at 460/480 V rated value 	10 hp
 at 575/600 V rated value 	0 hp
Contactor	
size of contactor	NEMA controller size 1
number of NO contacts for main contacts	3
operating voltage for main current circuit at AC at 60 Hz maximum	600 V
operational current at AC at 600 V rated value	27 A
mechanical service life (operating cycles) of the main contacts typical	10000000
Auxiliary contact	
number of NC contacts at contactor for auxiliary contacts	0
number of NO contacts at contactor for auxiliary contacts	1
number of total auxiliary contacts maximum	8
contact rating of auxiliary contacts of contactor according to UL	10A@600VAC (A600), 5A@600VDC (P600)
Coil	
type of voltage of the control supply voltage	AC
control supply voltage	
 at AC at 50 Hz rated value 	240 V
• at AC at 60 Hz rated value	277 V
holding power at AC minimum	8.6 W
apparent pick-up power of magnet coil at AC	218 VA
apparent holding power of magnet coil at AC	25 VA
operating range factor control supply voltage rated value of	0.85 1.1

magnet coil	
magnet coil percental drop-out voltage of magnet coil related to the input	50 %
voltage	00 /0
ON-delay time	19 29 ms
OFF-delay time	10 24 ms
Overload relay	
product function	
overload protection	Yes
phase failure detection	Yes
asymmetry detection	Yes
ground fault detection	Yes
• test function	Yes
external reset	Yes
reset function	Manual, automatic and remote
trip class	CLASS 5 / 10 / 20 (factory set) / 30
adjustable current response value current of the current- dependent overload release	10 40 A
make time with automatic start after power failure maximum	3 s
relative repeat accuracy	1%
product feature protective coating on printed-circuit board	Yes
number of NC contacts of auxiliary contacts of overload relay	1
number of NO contacts of auxiliary contacts of overload relay	1
operational current of auxiliary contacts of overload relay	
• at AC at 600 V	5 A
• at DC at 250 V	1A
contact rating of auxiliary contacts of overload relay according to UL	5A@600VAC (B600), 1A@250VDC (R300)
insulation voltage (Ui)	
with single-phase operation at AC rated value	600 V
with multi-phase operation at AC rated value	300 V
Enclosure	
degree of protection NEMA rating	4, 12
design of the housing	dustproof, waterproof & weatherproof
Circuit Breaker	
type of the motor protection	Motor circuit protector (magnetic trip only)
operational current of motor circuit breaker rated value	30 A
adjustable current response value current of instantaneous short-circuit trip unit	80 270 A
Mounting/wiring	
mounting position	Vertical
fastening method	Surface mounting and installation
type of electrical connection for supply voltage line-side	Box lug
type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded	Box lag
	1x (10 AWG 1/0 AWG)
temperature of the conductor for supply maximum permissible	
temperature of the conductor for supply maximum permissible material of the conductor for supply	1x (10 AWG 1/0 AWG)
	1x (10 AWG 1/0 AWG) 75 °C
material of the conductor for supply	1x (10 AWG 1/0 AWG) 75 °C AL or CU
material of the conductor for supply type of electrical connection for load-side outgoing feeder	1x (10 AWG 1/0 AWG) 75 °C AL or CU Screw-type terminals
material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor cross-sections for AWG cables	1x (10 AWG 1/0 AWG) 75 °C AL or CU Screw-type terminals 35 35 lbf·in
material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder single or multi-stranded temperature of the conductor for load-side outgoing feeder	1x (10 AWG 1/0 AWG) 75 °C AL or CU Screw-type terminals 35 35 lbf·in 1x (14 2 AWG)
material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder single or multi-stranded temperature of the conductor for load-side outgoing feeder maximum permissible	1x (10 AWG 1/0 AWG) 75 °C AL or CU Screw-type terminals 35 35 lbf·in 1x (14 2 AWG) 75 °C
material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf·in] for load-side outgoing feeder type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder single or multi-stranded temperature of the conductor for load-side outgoing feeder maximum permissible material of the conductor for load-side outgoing feeder type of electrical connection of magnet coil	1x (10 AWG 1/0 AWG) 75 °C AL or CU Screw-type terminals 35 35 lbf·in 1x (14 2 AWG) 75 °C AL or CU
material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf·in] for load-side outgoing feeder type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder single or multi-stranded temperature of the conductor for load-side outgoing feeder maximum permissible material of the conductor for load-side outgoing feeder	1x (10 AWG 1/0 AWG) 75 °C AL or CU Screw-type terminals 35 35 lbf·in 1x (14 2 AWG) 75 °C AL or CU Screw-type terminals
material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf·in] for load-side outgoing feeder type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder single or multi-stranded temperature of the conductor for load-side outgoing feeder maximum permissible material of the conductor for load-side outgoing feeder type of electrical connection of magnet coil tightening torque [lbf·in] at magnet coil type of connectable conductor cross-sections of magnet coil for	1x (10 AWG 1/0 AWG) 75 °C AL or CU Screw-type terminals 35 35 lbf·in 1x (14 2 AWG) 75 °C AL or CU Screw-type terminals 5 12 lbf·in
material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder single or multi-stranded temperature of the conductor for load-side outgoing feeder maximum permissible material of the conductor for load-side outgoing feeder type of electrical connection of magnet coil tightening torque [lbf-in] at magnet coil type of connectable conductor cross-sections of magnet coil for AWG cables single or multi-stranded temperature of the conductor at magnet coil maximum	1x (10 AWG 1/0 AWG) 75 °C AL or CU Screw-type terminals 35 35 lbf·in 1x (14 2 AWG) 75 °C AL or CU Screw-type terminals 5 12 lbf·in 2x (16 12 AWG)
material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf·in] for load-side outgoing feeder type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder single or multi-stranded temperature of the conductor for load-side outgoing feeder maximum permissible material of the conductor for load-side outgoing feeder type of electrical connection of magnet coil tightening torque [lbf·in] at magnet coil type of connectable conductor cross-sections of magnet coil for AWG cables single or multi-stranded temperature of the conductor at magnet coil maximum permissible	1x (10 AWG 1/0 AWG) 75 °C AL or CU Screw-type terminals 35 35 lbf·in 1x (14 2 AWG) 75 °C AL or CU Screw-type terminals 5 12 lbf·in 2x (16 12 AWG)
material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf·in] for load-side outgoing feeder type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder single or multi-stranded temperature of the conductor for load-side outgoing feeder maximum permissible material of the conductor for load-side outgoing feeder type of electrical connection of magnet coil tightening torque [lbf·in] at magnet coil type of connectable conductor cross-sections of magnet coil for AWG cables single or multi-stranded temperature of the conductor at magnet coil maximum permissible material of the conductor at magnet coil	1x (10 AWG 1/0 AWG) 75 °C AL or CU Screw-type terminals 35 35 lbf-in 1x (14 2 AWG) 75 °C AL or CU Screw-type terminals 5 12 lbf-in 2x (16 12 AWG) 75 °C CU

AWG cables for auxiliary contacts single or multi-stranded	
temperature of the conductor at contactor for auxiliary contacts maximum permissible	75 °C
material of the conductor at contactor for auxiliary contacts	CU
type of electrical connection at overload relay for auxiliary contacts	Screw-type terminals
tightening torque [lbf·in] at overload relay for auxiliary contacts	7 10 lbf·in
type of connectable conductor cross-sections at overload relay for AWG cables for auxiliary contacts single or multi-stranded	2x (20 14 AWG)
temperature of the conductor at overload relay for auxiliary contacts maximum permissible	75 °C
material of the conductor at overload relay for auxiliary contacts	CU
Short-circuit current rating	
design of the short-circuit trip	Instantaneous trip circuit breaker
maximum short-circuit current breaking capacity (Icu)	
• at 240 V	100 kA
• at 480 V	100 kA
• at 600 V	25 kA
certificate of suitability	NEMA ICS 2; UL 508; CSA 22.2, No.14
Further information	

Industrial Controls - Product Overview (Catalogs, Brochures,...)


Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:18DUE92NL


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/US/en/ps/US2:18DUE92NI

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:18DUE92NL&lang=en

Certificates/approvals
https://support.industry.siemens.com/cs/US/en/ps/US2:18DUE92NL/certificate

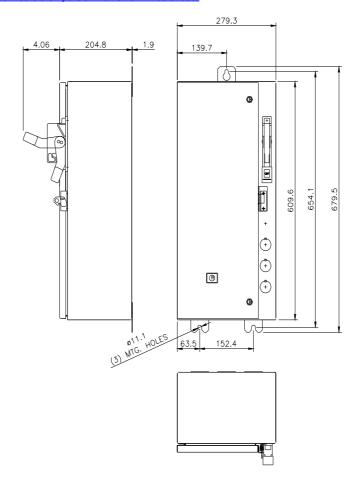

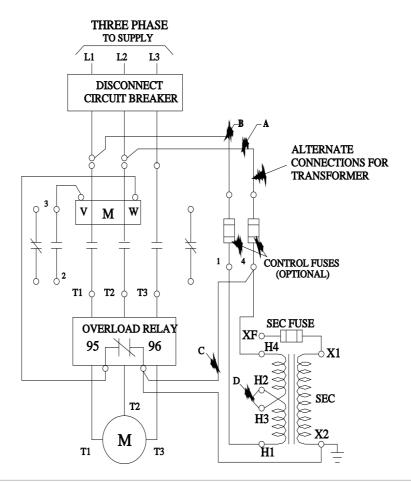

last modified: 1/25/2022 🖸