

RoHS Compliant
Pb - Lead Free

Ltr	Revisions	Date	Appr

Electrical Specifications:

Frequency Range	10.000 to 52.000	MHz	
Frequency Tolerance	±2.0	ppm Max.	
Frequency Stability vs. Operating Temperature	±0.5 ~ ±2.5		
Frequency Stability vs. Supply Voltage Change	±0.2		
Frequency Stability vs. 10% Load Change	±0.2		
Aging per Year	±1.0		
Operating Temperature Range	Standard	-20 to +70	°C
	Extended	-40 to +85	
Storage Temperature Range	-55 to +125		
Supply Voltage	1.8 ± 5%	VDC	
	2.5 ± 5%		
	3.3 ± 5%		
Input Current	2.5	mA Max.	
Output Level	0.8	Vp-p Min.	
Output Waveform	Clipped Sinewave		
Output Load	10KΩ // 10pF		
Phase Noise	@100Hz Offset	-114	dBc/Hz Typ.
	@1KHz Offset	-131	
	@10KHz Offset	-148	
Start Up Time	2	ms Max.	



Accurate Kinetic Energy

No.11-3 Jianguo Rd., T.E.P.Z. 42760 Taiwan, ROC

All dimensions are millimeters.

CAD: TCR

Review: EG

Appr: JL

Page: 1/4 Date: Jan 8,2020


Specification Title:

**Temperature Compensated
Crystal Oscillator
TCXO - Ceramic Package
3.2 x 2.5 millimeter Surface Mount**

Part Number:

TX32 Series

Mechanical Outline and Solder Pad Layout:

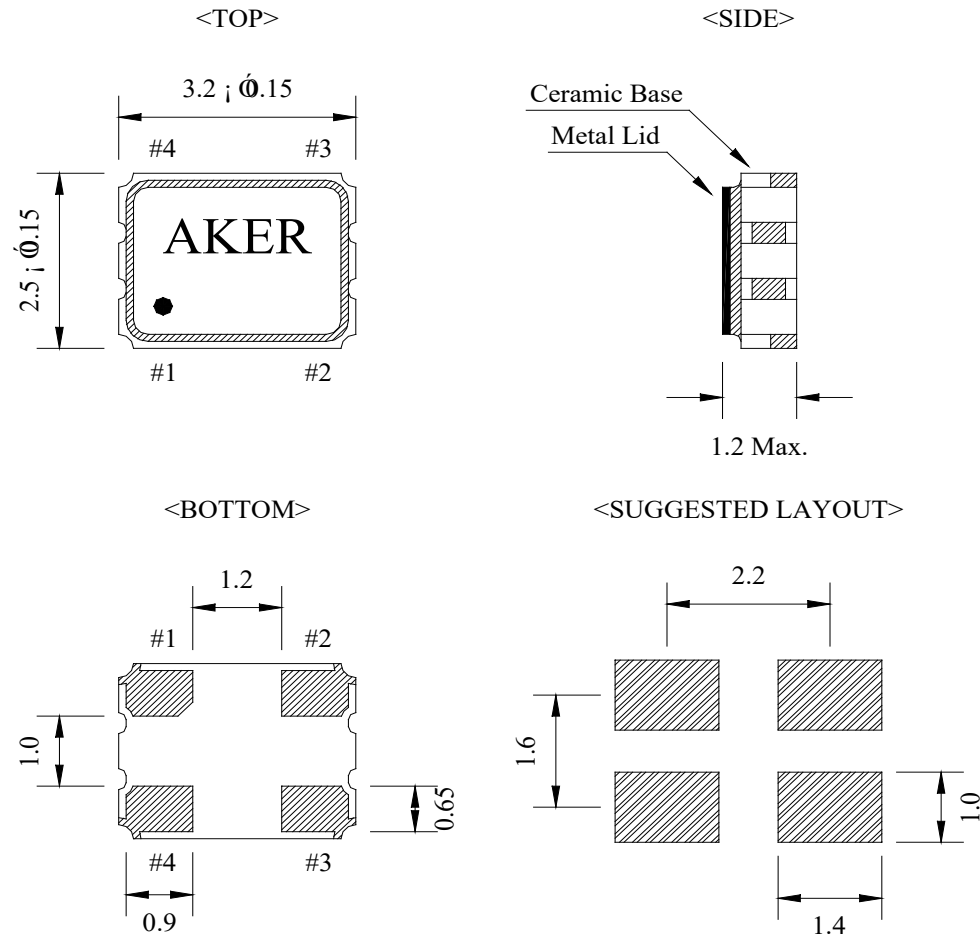

PIN No.	Connection
#1	NC / GND
#2	GND
#3	Output
#4	VDC

**Package is Seam Sealed Ceramic-Metal.
Dimensions are millimeters.**

How to build a Part Number:

Series	TX	Parameter
Package	32	3.2 x 2.5 mm
-		
Supply Voltage	18	1.8 VDC \pm 5%
	25	2.5 VDC \pm 5%
	33	3.3 VDC \pm 5%
-		
Temperature Stability	005	\pm 0.5 ppm
	010	\pm 1.0 ppm
	020	\pm 2.0 ppm
	25	\pm 2.5 ppm
-		
Output Waveform	S	Clipped Sinewave
-		
Frequency	10.000~52.000	MHz
-		
Temperature Range	See Notes	-20 to +70 °C
	X	-40 to +85 °C
-		
Packaging	M	250pcs Reel
	R	1000pcs Reel
	R3	3000pcs Reel

Part Number Example:

TX32-33020S-26.000-X-R

TX32: 3.2 x 2.5 mm SMD Package

33: +3.3 VDC Supply Voltage

020: \pm 2.0 ppm Temperature Stability

S: Clipped Sinewave Output

26.000 MHz Nominal Frequency

X: -40 to + 85°C Temperature Range

R: Tape and Reel Packaging

Notes:

- 1- Standard Temperature Range do not need to be included in Part Number description.
- 2- Product is shipped in Tape and Reel configuration.
- 3- Quantities less than 1000 are shipped bulk in ESD pouches.
- 4- Specification subject to change without notice.