

OX4551C-HZ-0.5-38.400-5



ELECTRICAL SPECIFICATIONS

PARAMETER	SYMBOL	CONDITION	VALUE			UNIT
			Min.	Typ.	Max.	
Nominal Frequency	f_o		38.400			MHz
Supply Voltage	V_s	$V_s \pm 5\%$ @ 25°C	4.75	5.0	5.25	V
Input Current	I_s	Steady state, @ 25°C			200	mA
	I_w	During warm-up, @ 25°C			700	mA
Initial Frequency Accuracy	$\Delta f/f_o$	$V_c=2.0V$, @25°C after 15mins power on ref to nominal frequency.	-200		+200	ppb
Frequency Stability vs. Temperature	$\Delta f/f_o (T_a)$	$T_a = -20^\circ C \dots +70^\circ C$, ref to +25°C	-5		+5	ppb
Frequency Stability vs. Supply Voltage	$\Delta f/f_o (\Delta V_{CC})$	$T_a=25^\circ C$, $V_s \pm 5\%$	-2		+2	ppb
Frequency Stability vs. Load Change	$\Delta f/f_o (\Delta I)$	$T_a=25^\circ C$, Load change, max.: $\pm 10\%$	-2		+2	ppb
Aging, after 30 days of operation	$\Delta f/\Delta t_d$	Daily	-0.5		+0.5	ppb
	$\Delta f/\Delta t_y$	First year	-75		+75	ppb
	$\Delta f/\Delta t_y$	10 years	-0.4		+0.4	ppm
Short Term Stability		After power on 1h, $T_a=25^\circ C$			0.05	ppb/s
Frequency Tuning Range		$V_c = 0V$			-0.5	ppm
	$\Delta f/f_o (\Delta V_c)$	$V_c = 2.0V$	-200		+200	ppb
		$V_c = 4.0V$	+0.5			ppm
Control Voltage Range	ΔV_c		0	2.0	4.0	V
Linearity			-10		+10	%
Slope		Positive				-
Input Impedance	Z_{in}		100			k Ω
Warm-up Time		Within ± 100 ppb of final frequency with reference after 1 hour on @ +25°C			2	min
Operating Temperature Range	T_a		-20		+70	°C
Storage Temperature Range	$T_{(stg)}$	Absolute max	-55		+105	°C

OX4551C-HZ-0.5-38.400-5**CMOS OUTPUT CHARACTERISTICS**

PARAMETER	SYMBOL	CONDITION	VALUE			UNIT
			Min.	Typ.	Max.	
Output Levels	VOH		2.4	2.8		V
	VOL				0.4	V
Duty Cycle	DC	load = 15pF	45		55	%
Rise/Fall Time	t_r/t_f	10% ~ 90% Vout			5	ns
Load				15		pF
Spurious					-70	dBc

PHASE NOISE


PARAMETER	SYMBOL	CONDITION	VALUE			UNIT
			Min.	Typ.	Max.	
@10 Hz Offset	$\mathcal{L}(\Delta f)$				-105	dBc/Hz
@100 Hz Offset	$\mathcal{L}(\Delta f)$				-130	dBc/Hz
@1 kHz Offset	$\mathcal{L}(\Delta f)$				-145	dBc/Hz
@10 kHz Offset	$\mathcal{L}(\Delta f)$				-150	dBc/Hz
@100 kHz Offset	$\mathcal{L}(\Delta f)$				-153	dBc/Hz
@1 MHz Offset	$\mathcal{L}(\Delta f)$				-155	dBc/Hz

ENVIRONMENTAL MECHANICAL CONDITIONS

Operable Temperature Range	-20 to + 70°C
Storage Temperature range	-55°C to +105°C
Drop Test	The test shall be carried out as the provisions of the IEC60028-2-32 test Ed. 10cm height, 3 times on hard board with thickness of 3cm
Bumping Test	Device are bumped to three mutually perpendicular axes at peak acceleration of 400m/s ² , each 4000±10times, 6ms pulse duration time
Vibration Test	Frequency range: 1Hz-4Hz-100Hz-200Hz Acceleration: 0.0001g ² /Hz-0.01g ² /Hz-0.01g ² /Hz-0.001g ² /Hz Grms=1.15g Sweep time: 30 minutes (perpendicular axes each sweep time)
Mechanical Shock	100g, 6mS duration, 1/2 sine wave, 3 shocks each direction along 3 mutually perpendicular planes.
Thermal shock	0.5h@-40°C, 0.5h@+85°C, Note: the changing time < 30 seconds, cycling for 100 times

OX4551C-HZ-0.5-38.400-5

MECHANICAL DIMENSIONS AND PIN FUNCTIONS

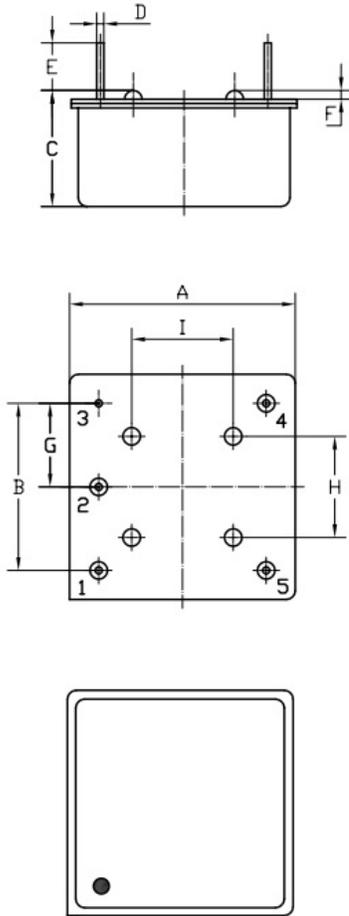

DIMENSIONS		
	Min	Max
A		21.6
B	14.74	15.74
C		11
D	0.4	0.6
E	4.0	5.0
F	0.5	0.7
G	7.52	7.72
H	10.1 nominal	
I	10.1 nominal	

PIN	SYMBOL	FUNCTION
1	V _s	Supply Voltage
2	OUTPUT	RF Output
3	GND	Ground
4	V _c	Control Voltage
5	NC	No Connect

	Signed	Date
Created	AR	May 27, 2022
Eng. approved	CP	May 27, 2022
REV A		

Raltron Electronics / RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided only for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.

Copyright © 2016, Raltron Electronics / RAMI Technology USA, LLC. All rights reserved. No part of this document may be reproduced in any form without the prior written permission of Raltron Electronics / RAMI Technology USA, LLC.