



## 608 SERIES 8mm Panel Mount Indicators

### MECHANICAL / SPECIFICATIONS

MOUNTING HOLE SIZE:  
0.323" (8.2 mm) (Fig. 1 & 2),

MAX PANEL THICKNESS: See part numbers

MOUNTING TORQUE:  
0.217 lbs/ft or 3 kg/cm

VOLTAGE OPTIONS:  
2 VDC (resistor required)

OPERATING TEMP:  
-25 °C to +85 °C (-13 °F to +185 °F)

STORAGE TEMP:  
-25 °C to +85 °C (-13 °F to +185 °F)

ELECTRICAL CONNECTION:  
Straight terminals (Fig. 1 & 2),

HOUSING:  
Polycarbonate

LOCK WASHER:  
Iron – Nickel Plated

NUT:  
Brass – Nickel Plated

### CERTIFICATIONS & RATINGS

RoHS compliant

### APPLICATION

The 608 Series LED Panel Mount Indicators are designed for a variety of applications such as.

- Main power indication
- Remote power indication
- Status indication
- Maintenance and warning indication
- Instrumentation

### DIMENSIONS inches [mm]

FIGURE 1


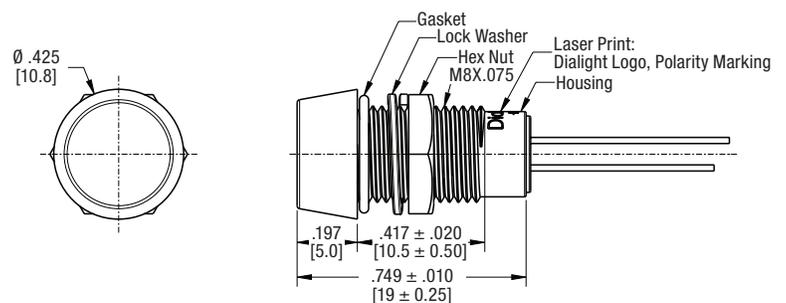


FIGURE 2

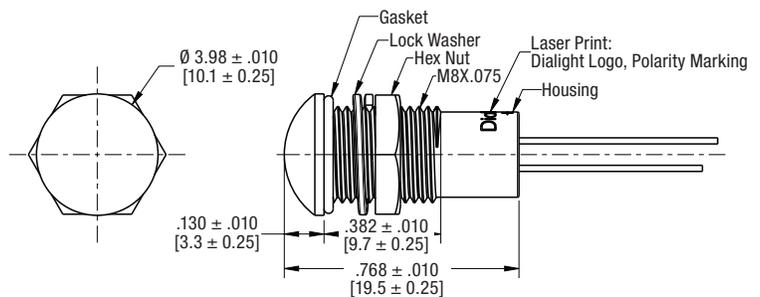

*These indicators are un-polarized*

ORDERING INFORMATION

LOCK WASHER AND NUT

Part Number	Color	Voltage (V DC)	Current (mA)	Typical Intensity (mcd)	Lens Shape	Figure	Panel Thickness
<a href="#">608-1131-110F</a>	● Red	2	15	25	Domed	1 2	0.236" (6 mm)
<a href="#">608-1231-110F</a>	● Green			30			
<a href="#">608-1331-110F</a>	● Yellow			15			
<a href="#">608-3131-110F</a>	● Red			25	Flat		
<a href="#">608-3231-110F</a>	● Green			30			
<a href="#">608-3331-110F</a>	● Yellow			15			



Dialight reserves the right to make changes at any time in order to supply the best product possible. The most current version of this document will always be available at: [www.dialightsignalsandcomponents.com](http://www.dialightsignalsandcomponents.com)

Warranty Statement: Except for the warranty expressly provided for at: [www.dialight.com/resources/warranties/](http://www.dialight.com/resources/warranties/), Dialight disclaims any and all other warranties, express or implied, including, without limitation, any warranties of merchantability, fitness for a particular purpose, title, and noninfringement.