

## 622 SERIES

# 22 mm Heavy Duty Panel Mount Indicators

### MECHANICAL / SPECIFICATIONS

**MOUNTING HOLE SIZE:**

0.866" (22 mm)

**MAX PANEL THICKNESS:**

0.394" (10 mm)

**MOUNTING TORQUE:**

7.01 lbs-ft (9.5 Nm)

**OPERATING VOLTAGE:**

3 VDC (external resistor required)

6, 12 & 24 VDC

(internal resistor included)

**OPERATING TEMP:**

-25 °C to +70 °C (-13 °F to 158 °F)

**STORAGE TEMP:**

-25 °C to +70 °C (-13 °F to 158 °F)

**ELECTRICAL CONNECTION:**

Screw terminals

**HOUSING:**

Stainless Steel

**NUT:**

Stainless Steel

### CERTIFICATIONS & RATINGS

RoHS compliant

IP66/IP67

IK10


NEMA 4X

### APPLICATION

The 622 Series Heavy Duty LED Panel Mount Indicators are elegantly designed for a high-end aesthetic paired with sturdy construction. These indicators are non-magnetic, corrosion resistant for both indoor and outdoor use, and secured to prevent dirt, dust, and water penetration. Ideal for a variety of applications such as:

- Main power indication
- Remote power indication
- Status indication
- Maintenance and warning indication
- Instrumentation

### DIMENSIONS inches [mm]

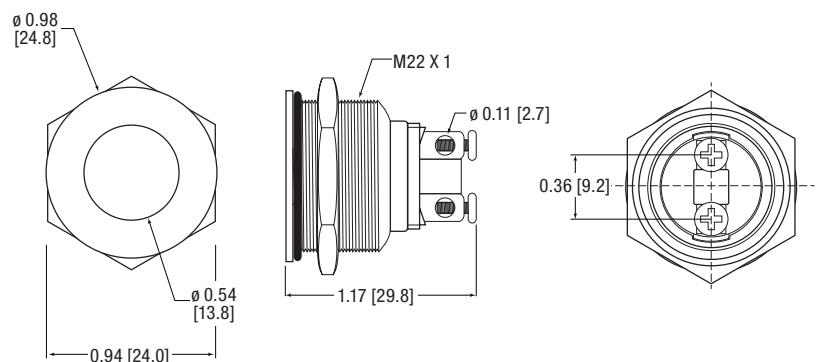

*These indicators are un-polarized*

## ORDERING INFORMATION

Part Number	Color	Voltage (VDC)	Current (mA)	Typical Intensity (mcd)
<a href="#">622-1101-304F</a>	Red	3	15	200
<a href="#">622-1201-304F</a>	Green			250
<a href="#">622-1301-304F</a>	Yellow			350
<a href="#">622-1401-304F</a>	Blue			300
<a href="#">622-1102-304F</a>	Red	6		200
<a href="#">622-1202-304F</a>	Green			250
<a href="#">622-1302-304F</a>	Yellow			350
<a href="#">622-1402-304F</a>	Blue			300
<a href="#">622-1103-304F</a>	Red	12		200
<a href="#">622-1203-304F</a>	Green			250
<a href="#">622-1303-304F</a>	Yellow			350
<a href="#">622-1403-304F</a>	Blue			300
<a href="#">622-1104-304F</a>	Red	24		200
<a href="#">622-1204-304F</a>	Green			250
<a href="#">622-1304-304F</a>	Yellow			350
<a href="#">622-1404-304F</a>	Blue			300



Dialight reserves the right to make changes at any time in order to supply the best product possible. The most current version of this document will always be available at: [www.dialightsignalsandcomponents.com](http://www.dialightsignalsandcomponents.com)

Warranty Statement: Except for the warranty expressly provided for at: [www.dialight.com/resources/warranties/](http://www.dialight.com/resources/warranties/), Dialight disclaims any and all other warranties, express or implied, including, without limitation, any warranties of merchantability, fitness for a particular purpose, title, and noninfringement.