
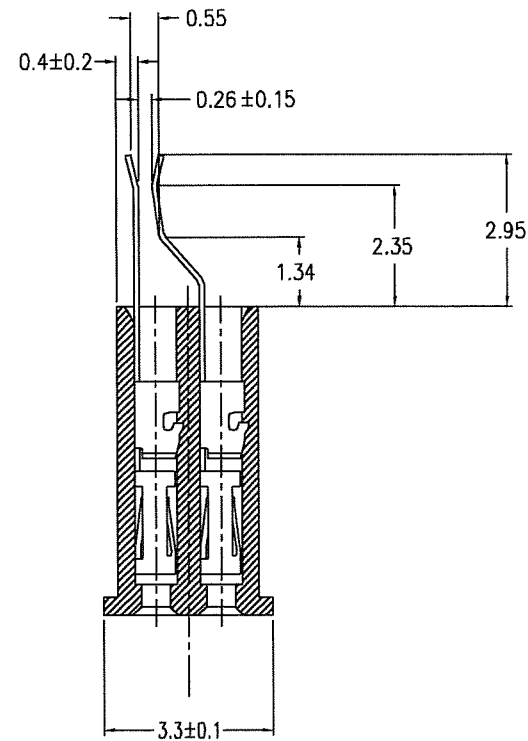
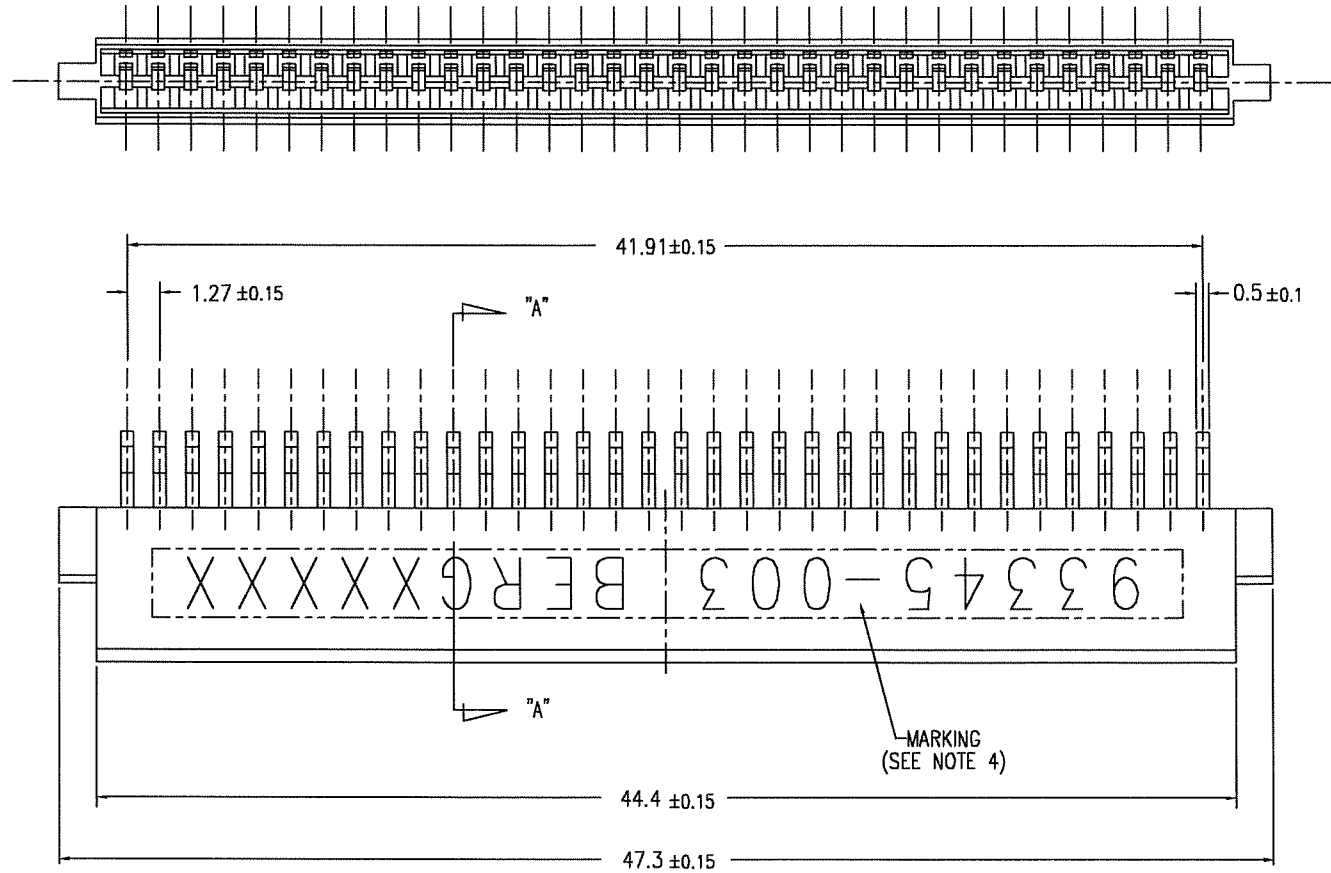




| PRODUCT NO. | HOUSING COLOR | PACKAGING     |
|-------------|---------------|---------------|
| 93345-003   | BLACK         | STANDARD TRAY |
| 93345-003LF | BLACK         | STANDARD TRAY |

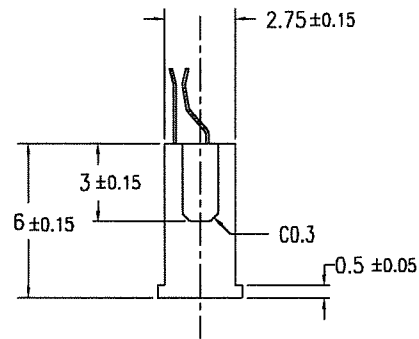

SECTION "A"-"A"

#### NOTE

- MATERIAL  
CONTACT : BeCu 0.08t  
HSG. : LCP UL94V-0  
FINISH(PLATING)  
CONTACT : ALL OVER ----- Ni UNDER 0.5  $\mu$ m THK.MIN.  
SELECTIVE ----- Au PLATING 0.1  $\mu$ m THK.MIN.  
OVER Pd-Ni PLATING.  
SOLDER TAIL ----- TIN LEAD 2.5  $\mu$ m THK. MIN.
- FOR MATING MALE CONN.(HDR./EJECTOR HDR.)  
TO APPLY 68POS. MALE CONN.(HDR./EJECTOR HDR.) BASED ON  
JEIDA AND PCMCIA SPECIFICATION
- GENERAL TOLERANCE :  $\pm 0.25$
- MARKING "93345-003 BERGXXXXX" (XXXXX : LOT No.)
- RECOMMENDED PWB THICKNESS : 0.21 TO 0.4
- 93345-003LF FINISH(PLATING)  
CONTACT : ALL OVER ----- Ni UNDER 0.5  $\mu$ m THK.MIN.  
SELECTIVE ----- Au PLATING 0.1  $\mu$ m THK.MIN.  
OVER Pd-Ni PLATING.  
SOLDER TAIL ----- Au 0.1  $\mu$ m THK. MIN.
- THIS LF SUFFIX PRODUCT MEETS EUROPEAN UNION DIRECTIVES  
AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

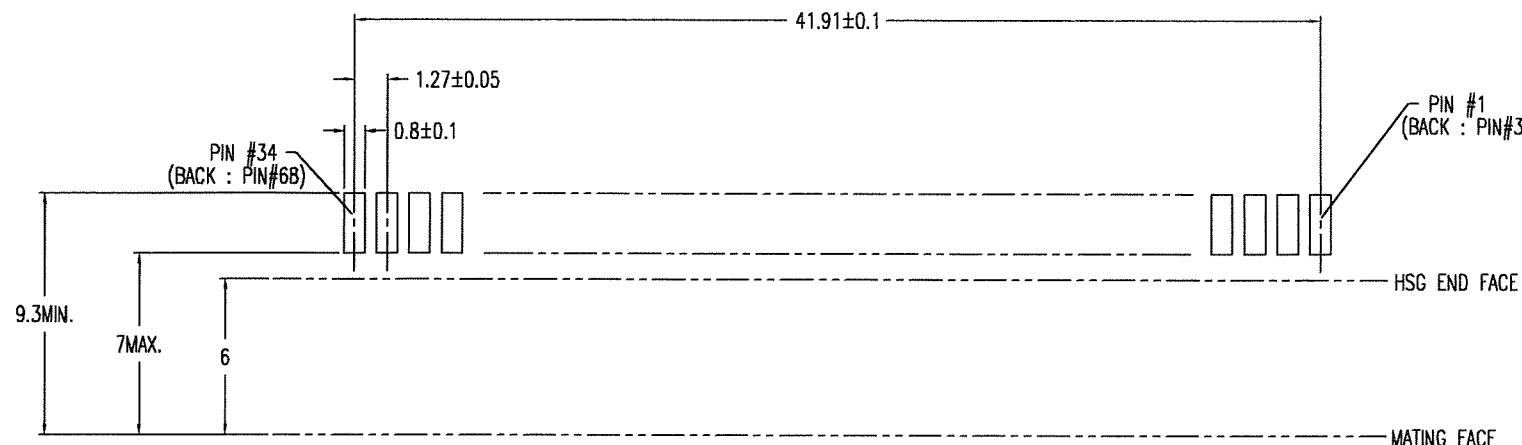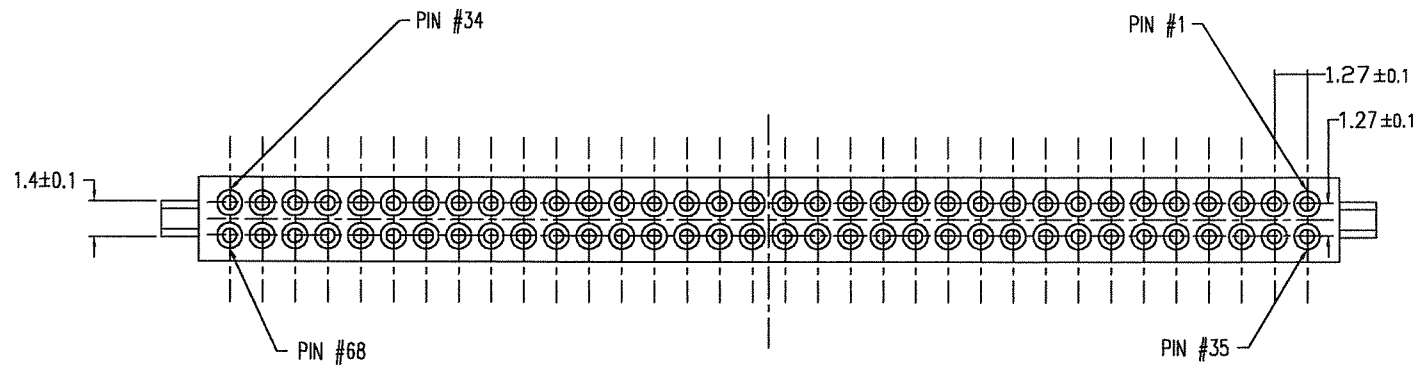

RECOMMENDED PWB FOOT PRINT LAYOUT

| mat'l. code |             |          |     |          | surface                               | tolerance | projection | product family           | CODE                     |
|-------------|-------------|----------|-----|----------|---------------------------------------|-----------|------------|--------------------------|--------------------------|
| ---         |             |          |     |          | ISO 1302                              | ISO 406   | ISO 1101   | 5B1F - PCMCIA RECEPTACLE | JP                       |
| ltr         | description | ecn no   | dr  | date     | tolerances unless otherwise specified | linear    | mm         | title                    |                          |
| 1           | SKETCHED    |          | KS  | 3/1/93   | angles                                | 0.X       | $\pm 0.25$ | JEIDA / PCMCIA           |                          |
| A           | RELEASED    | J30396   | KS  | 12/10/93 | linear                                | 0.XX      | $\pm 0.25$ | 68POS. RECEPTACLE        |                          |
| B           | REVISED     | J05-0743 | R.S | 2/15/06  | 0'±X'                                 | 0.XXX     | $\pm 0.25$ | scale 5:1                |                          |
| C           | REVISED     | J06-0354 | R.S | 9/6/06   | dr                                    | R.SHOUJI  | 9/6/06     | dwg no                   | sheet 1 of 1 size        |
|             |             |          |     |          | enrg                                  | R.SHOUJI  | 9/6/06     | 93345                    | A2                       |
|             |             |          |     |          | chr                                   |           |            |                          |                          |
|             |             |          |     |          | appd                                  |           |            |                          |                          |
| sheet       | revision    | C        |     |          |                                       |           |            | type                     | Product Customer Drawing |
| index       | sheet       | 1        |     |          |                                       |           |            | Rev.                     | C                        |