

#### **SIM Connectors**

TE Internal #: 1981959-1

SIM Card Connectors, 2FF mini SIM Compatible Card, 8 Position, 8 Loaded Positions, Signal, -13 - 158 °F [-25 - 70 °C], SIM Connectors

View on TE.com >



Connectors > PCB Connectors > Memory Card Connectors > SIM Card Connectors











Compatible Card: 2FF mini SIM

Number of Positions: 8

Number of Loaded Positions: 8

Contact Current Rating (Max): 1.2 A

Circuit Application: Signal

## **Features**

### Product Type Features

Card Stop	With
Connector & Contact Terminates To	Printed Circuit Board
Compatible Card	2FF mini SIM

### **Configuration Features**

Card Insertion Style	Normal Insertion
Card Detection Switch	With
Number of Positions	8
Number of Loaded Positions	8

#### **Electrical Characteristics**

Voltage Rating	15 VAC
Current Rating (Max)	1.2 A

## **Body Features**

Ejector Type	Push-Push
Primary Product Color	Black



#### **Contact Features**

Contact Mating Retention	With
Contact Base Material	Copper Alloy
Contact Current Rating (Max)	1.2 A

#### **Termination Features**

#### **Mechanical Attachment**

Mating Alignment	With
Connector Mounting Type	Board Mount

#### **Housing Features**

Shell Material	Copper Alloy
Housing Material	LCP (Liquid Crystal Polymer)
Centerline (Pitch)	2.54 mm[.1 in]

#### **Dimensions**

Profile Height from PCB	1.87 mm[.073 in]
-------------------------	------------------

## **Usage Conditions**

Orangetia a Tanana aratuwa Dana	25 70 001 12 150 051
Operating Temperature Range	-25 - 70 °C[-13 - 158 °F]

## Operation/Application

Durability Rating	1500 Cycles
Circuit Application	Signal

## **Industry Standards**

UL Flammability Rating UL 94V-0
---------------------------------

## **Packaging Features**

Packaging Quantity	800
Packaging Method	Tape & Reel

## **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold



EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free
Solder Process Capability	Reflow solder capable to 260°C


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**



## Also in the Series | SIM Connectors

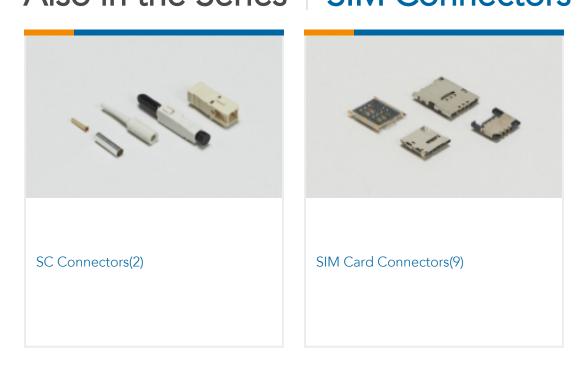

# **Customers Also Bought**





















#### **Documents**

## **Product Drawings**

**PUSH PUSH SIM H1.87 SWITCH EMBOSS ASSY** 

English

#### **CAD Files**

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_1981959-1\_C.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1981959-1\_C.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1981959-1\_C.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions**of use

**Product Specifications** 

SIM Card Connectors, 2FF mini SIM Compatible Card, 8 Position, 8 Loaded Positions, Signal, -13 - 158 °F [-25 - 70 °C], SIM Connectors



**Product Specification** 

English

**Product Specification** 

Japanese