

AXL F EX IS DI16 NAM XC 1F - Digital module



1052423

<https://www.phoenixcontact.com/us/products/1052423>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Axioline F, Digital input module, Digital inputs: 16 (NAMUR), 8 V DC, connection technology: 2-conductor, Extreme conditions version, Intrinsically safe, transmission speed in the local bus: 100 Mbps, degree of protection: IP20, including bus base module and Axioline F connectors

Product description

The module is an Axioline F I/O module for use in the Axioline F modular I/O system. It is used to acquire digital signals. The module is a modular I/O device that can be affixed to the Axioline F local bus, to communicate I/O data up to the Axioline F controller or bus coupler, which forms the head of the station. As an intrinsic safety I/O module, this device allows direct connection from intrinsically safe field I/Os to the terminals of the module. The digital input module with NAMUR capabilities collects digital input signals and supports NAMUR proximity and close contact switches and makes this information available to the controller / bus coupler through the Axioline F local bus.

Your advantages

- 16 NAMUR digital input signals for NAMUR proximity sensors according to EN 60947-5-6
- Open circuit contacts
- Switch contacts with resistance circuit in accordance with IEC/EN 60947-5-6
- Connection of sensors in 2-conductor technology
- Intrinsically safe analog inputs with connection to Zone 1, Zone 0 or Division 1
- Can be used under extreme ambient conditions
- Extended temperature range of -40 °C ... +70 °C (see "Tested successfully: use under extreme ambient conditions" in the data sheet)

Commercial data

Item number	1052423
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DR02
Product key	DRI2E4
GTIN	4055626674940
Weight per piece (including packing)	420 g
Weight per piece (excluding packing)	292.5 g
Customs tariff number	85389099
Country of origin	US

AXL F EX IS DI16 NAM XC 1F - Digital module




1052423

<https://www.phoenixcontact.com/us/products/1052423>

Technical data

Dimensions

Dimensional drawing	
	
Width	53.6 mm
Height	129.9 mm
Depth	77.14 mm
Note on dimensions	The depth applies when a TH 35-7.5 DIN rail is used (in accordance with EN 60715).

Notes

Utilization restriction	
EMC note	EMC: class A product, see manufacturer's declaration in the download area
Utilization restriction	
CCCex note	Use in potentially explosive areas is not permitted in China.

Material specifications

Color	traffic grey A RAL 7042
-------	-------------------------

Interfaces

Axioline F local bus	
No. of channels	2
Connection method	Bus base module
Transmission speed	100 Mbps

System properties

Module	
Input address area	2 Byte
Output address area	0 Byte
Required parameter data	6 Byte
Required configuration data	6 Byte

Input data

Digital:	
Input name	Digital inputs

AXL F EX IS DI16 NAM XC 1F - Digital module



1052423

<https://www.phoenixcontact.com/us/products/1052423>

Description of the input	NAMUR enabled digital input signals
Number of inputs	16 (NAMUR)
Connection method	Push-in connection
Connection technology	2-conductor
Nominal input voltage U_{IN}	8.2 V DC

Product properties

Product type	I/O component
Product family	Axioline F
Type	block modular
Mounting position	any (no temperature derating)
Scope of delivery	including bus base module and Axioline F connectors
Special properties	Extreme conditions version
	Intrinsically safe

Insulation characteristics

Overvoltage category	II
Pollution degree	2

Electrical properties

Potentials: Axioline F local bus supply (U_{BUS})

Supply voltage	5 V DC (via bus base module)
Current draw	max. 60 mA
	typ. 40 mA

Potentials: Supply for digital input modules (U_I)

Supply voltage	24 V DC
Supply voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple)
Current draw	max. 130 mA

Electrical isolation/isolation of the voltage ranges

Test voltage: 5 V supply of the local bus (U_{BUS}) / 24 V supply (I/Os)	500 V AC, 50 Hz, 1 min.
Test voltage: 5 V supply of the local bus (U_{BUS}) / functional ground	500 V AC, 50 Hz, 1 min.
Test voltage: 24 V supply (I/O) / functional ground	500 V AC, 50 Hz, 1 min.
Test voltage: Field to functional earth	500 V AC, 50 Hz, 1 min.
Test voltage: Field to 5V or 24V supplies	1500 V AC, 50 Hz, 1 min.

Connection data

Connection technology

Connection name	Axioline F connector
Note on the connection method	Please observe the information provided on conductor cross sections in the "Axioline F: system and installation" user manual.

Conductor connection

AXL F EX IS DI16 NAM XC 1F - Digital module



1052423

<https://www.phoenixcontact.com/us/products/1052423>

Connection method	Push-in connection
Conductor cross section rigid	0.2 mm² ... 1.5 mm²
Conductor cross section flexible	0.2 mm² ... 1.5 mm²
Conductor cross section AWG	24 ... 16
Stripping length	8 mm

Axioline F connector

Connection method	Push-in connection
Note on the connection method	Please observe the information provided on conductor cross sections in the "Axioline F: system and installation" user manual.
Conductor cross section, rigid	0.2 mm² ... 1.5 mm²
Conductor cross section, flexible	0.2 mm² ... 1.5 mm²
Conductor cross section AWG	24 ... 16
Stripping length	8 mm

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-25 °C ... 60 °C (Standard) -40 °C ... 70 °C (Extended, see section "Tested successfully: use under extreme ambient conditions" in the data sheet.)
Degree of protection	IP20
Air pressure (operation)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Permissible humidity (operation)	5 % ... 95 % (non-condensing)
Permissible humidity (storage/transport)	5 % ... 95 % (non-condensing)

Standards and regulations

Protection class	III (IEC 61140, EN 61140, VDE 0140-1)
------------------	---------------------------------------

Approvals

ATEX

Identification	II 3(1) G Ex ec [ia Ga] IIC T4 Gc II (1) D [Ex ia Da] IIIC
Certificate	DEMKO 20 ATEX 2370X

IECEX

Identification	Ex ec [ia Ga] IIC T4 Gc [Ex ia Da] IIIC
Certificate	IECEX UL 20.0044X

UKCA Ex (UKEX)

Identification	II 3(1) G Ex ec [ia Ga] IIC T4 Gc II (1) D [Ex ia Da] IIIC
Certificate	UL22UKEX2508X

AXL F EX IS DI16 NAM XC 1F - Digital module



1052423

<https://www.phoenixcontact.com/us/products/1052423>

UL, USA/Canada

Identification	cULus
Certificate	E238705

UL Ex, USA / Canada

Identification	Class I, Division 2, Groups A, B, C, D, T4
	Intrinsically safe outputs for: Class I, Groups A, B, C, D; Class II, Groups E, F, G; Class III; [Ex ia] Haz loc
	Class I, Zone 2, AEx ec [ia Ga] IIC T4 Gc
	[AEx ia Da] IIIC
	Ex ec [ia Ga] IIC T4 Gc
Certificate	[Ex ia Da] IIIC
	E196811

CCC / China-Ex

Identification	Ex ec [ia Ga] IIC T4 Gc
----------------	-------------------------

CCC / China-Ex

Identification	[Ex ia Da] IIIC
----------------	-----------------

Ex data

UL, USA / Canada	Ind. Cont. Eq. (E238705) also Listed Ind. Cont. Eq. for haz. loc. E196811 Install in: Class I, Div. 2, Groups A, B, C, D T4 Intrinsically safe outputs for: Class I, Groups A, B, C, D; Class II, Groups E, F, G; Class III; [Ex ia] Haz loc Class I, Zone 2, AEx ec [ia Ga] IIC T4 Gc [AEx ia Da] IIIC Ex ec [ia Ga] IIC T4 Gc [Ex ia Da] IIIC
------------------	--

Mounting

Mounting type	DIN rail mounting
Mounting position	any (no temperature derating)

Ex data

Safety data

Max. output voltage U_o	10.6 V
Max. output current I_o	11 mA
Max. output power P_o	30 mW
Safety-related maximum voltage U_m	250 V
A, B / IIC: Max. external inductivity L_o / Max. external capacitance C_o	100 mH / 2.3 μ F
C/IIB, IIIC: Max. external inductivity L_o / Max. external capacitance C_o	100 mH / 16 μ F
D/IIA, E, F, G, Class III: Max. external inductivity L_o / Max. external capacitance C_o	100 mH / 71.8 μ F

AXL F EX IS DI16 NAM XC 1F - Digital module




1052423


<https://www.phoenixcontact.com/us/products/1052423>

Drawings

Dimensional drawing

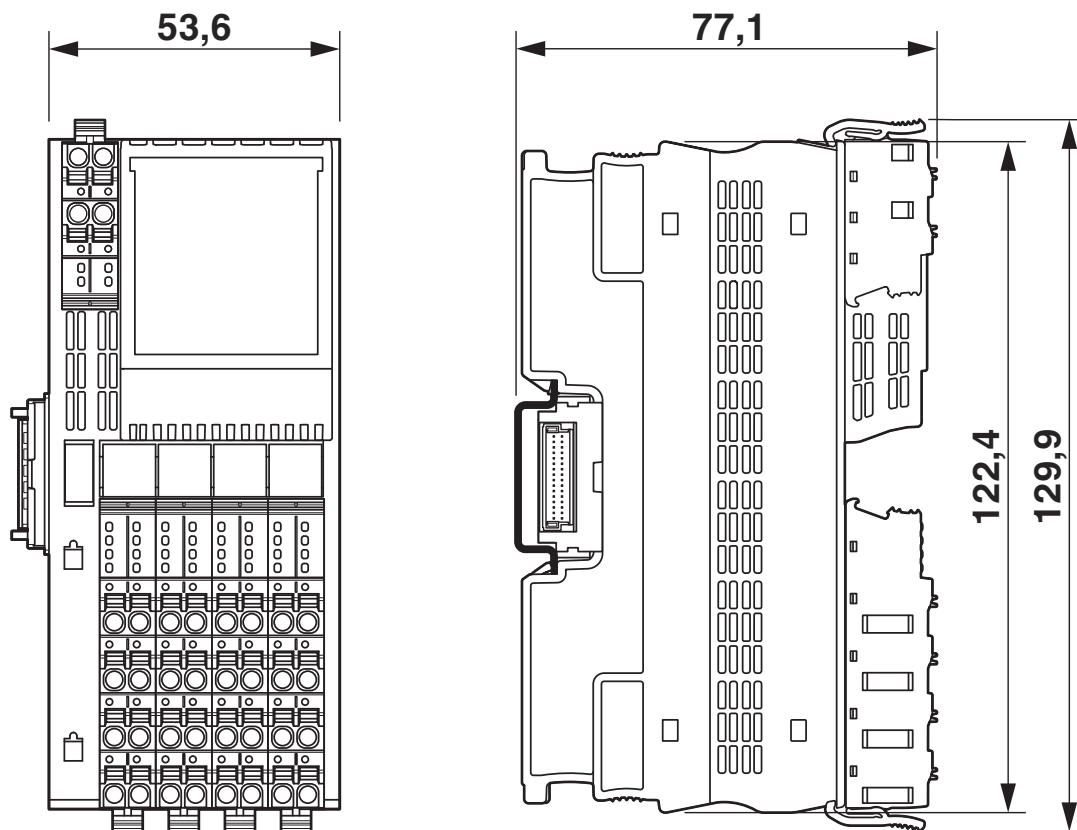

Schematic diagram

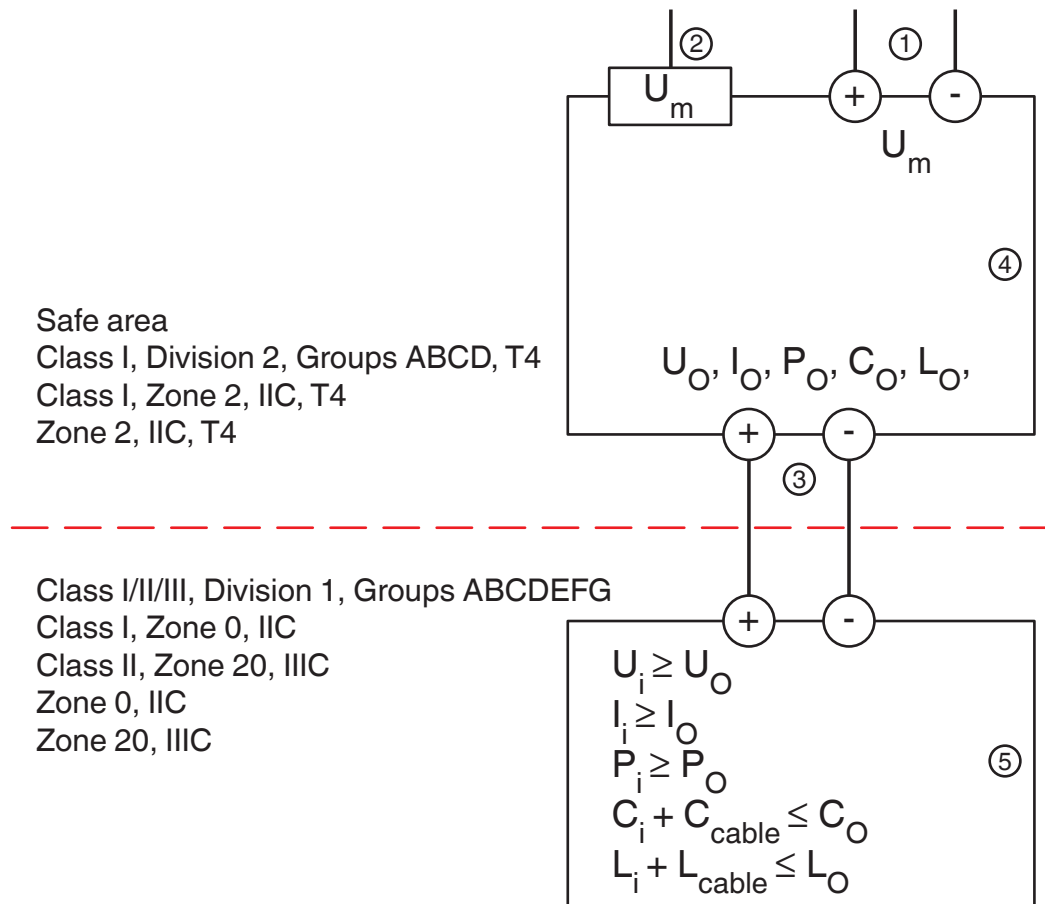

AXL F EX IS DI16 NAM XC 1F - Digital module



1052423

<https://www.phoenixcontact.com/us/products/1052423>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1052423>

	UL Listed Approval ID: File E238705
	cUL Listed Approval ID: E238705
	IECEx Approval ID: IECEx UL 20.0044X
	cUL Listed Approval ID: FILE E196811
	UL Listed Approval ID: FILE E196811
	ATEX Approval ID: DEMKO 20 ATEX 2370X
	CCC Approval ID: 2021122316114727
	UKCA-EX Approval ID: UL22UKEX2508X
	cULus Listed
	cULus Listed

AXL F EX IS DI16 NAM XC 1F - Digital module



1052423

<https://www.phoenixcontact.com/us/products/1052423>

Classifications

ECLASS

ECLASS-11.0	27242604
ECLASS-12.0	27242604
ECLASS-13.0	27242604

ETIM

ETIM 9.0	EC001599
----------	----------

UNSPSC

UNSPSC 21.0	32151600
-------------	----------

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I
China RoHS	
Environment friendly use period (EFUP)	EFUP-25
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	a18a7f42-803b-4991-a5d6-059413f35187

AXL F EX IS DI16 NAM XC 1F - Digital module

1052423

<https://www.phoenixcontact.com/us/products/1052423>



Accessories

AXL F BS F - Bus connector

2688129

<https://www.phoenixcontact.com/us/products/2688129>

Axioline F bus base module for housing type F




AXL SHIELD SET - Shield connection

2700518

<https://www.phoenixcontact.com/us/products/2700518>

Axioline shield connection set (contains 2 shield bus holders and 2 SK 5 shield connection clamps)



AXL F EX IS DI16 NAM XC 1F - Digital module



1052423

<https://www.phoenixcontact.com/us/products/1052423>

ZB 20,3 AXL UNPRINTED - Zack marker strip

0829579

<https://www.phoenixcontact.com/us/products/0829579>



Zack marker strip for Axioline F (device labeling), in 2 x 20.3 mm pitch, unprinted, 25-section, for individual labeling with B-STIFT 0.8, X-PEN, or CMS-P1-PLOTTER

ZBF 10/5,8 AXL UNPRINTED - Zack Marker strip, flat

0829580

<https://www.phoenixcontact.com/us/products/0829580>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 10.15 mm, lettering field size: 4 x 10, 15 x 5 mm, 1 x 5.8 x 5 mm, Number of individual labels: 50

AXL F EX IS DI16 NAM XC 1F - Digital module

1052423

<https://www.phoenixcontact.com/us/products/1052423>



EMT (35X46)R - Insert label

0801604

<https://www.phoenixcontact.com/us/products/0801604>



Insert label, for marking the Axioline F series from Phoenix Contact, Roll, white, unlabeled, can be labeled with: THERMOMARK E.300 (D)/600 (D), THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMaster 300/600, THERMOMARK X1.2, mounting type: insert, lettering field size: 35 x 46 mm, Number of individual labels: 500

AXL F/P IO EX PP - Separating plate

1100201

<https://www.phoenixcontact.com/us/products/1100201>

Axioline F/P partition plate for intrinsically safe modules



AXL F EX IS DI16 NAM XC 1F - Digital module

1052423

<https://www.phoenixcontact.com/us/products/1052423>



AXL F BS F - Bus connector

2688129

<https://www.phoenixcontact.com/us/products/2688129>

Axioline F bus base module for housing type F



Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com