


Connector Location A





Connector Location B

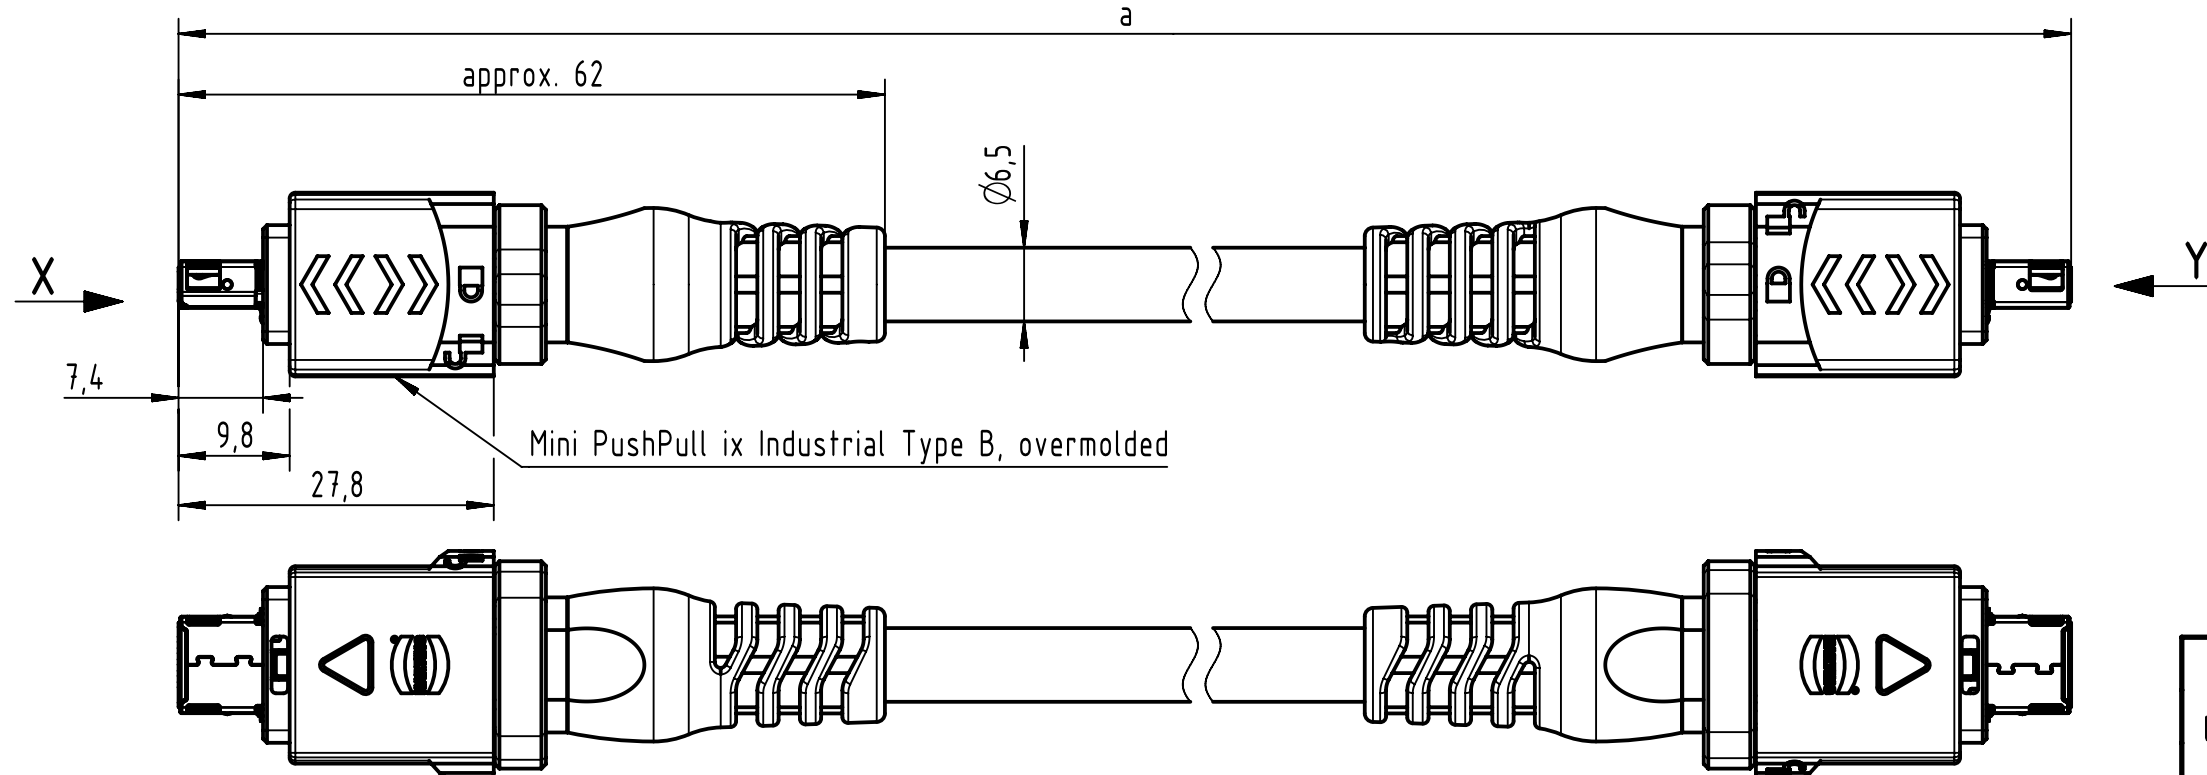

X male

Loading Plan acc. to DIN 47100

Y male

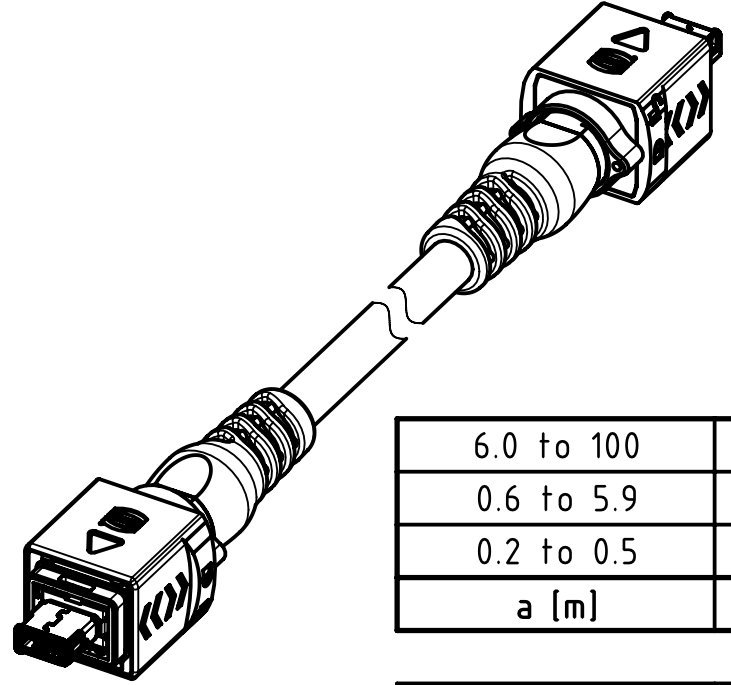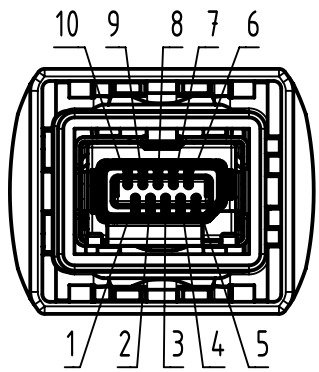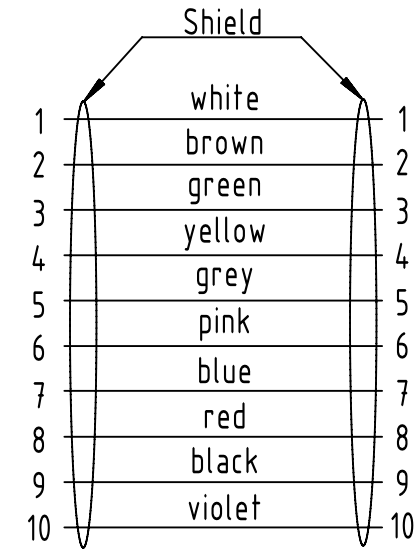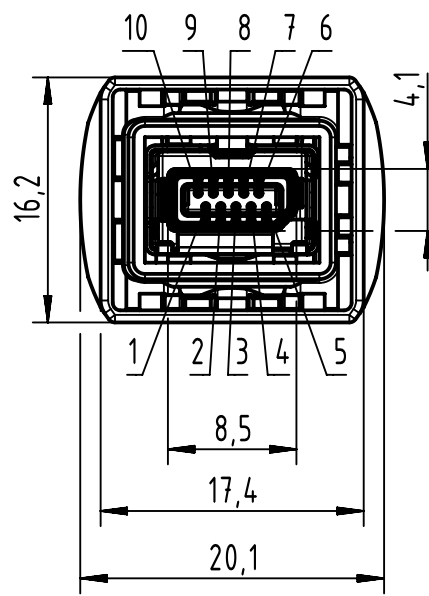

6.0 to 100	±1%
0.6 to 5.9	+0.04
0.2 to 0.5	+0.02
a [m]	Tolerance

length in "1m" step	100	XXX=000
	99	XXX=990
	.	.
	12	XXX=120
	11	XXX=110
length in "0.1m" step	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	0.5	XXX=005
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
Step	a [m]	XXX

Helukabel DATAPUR-C:
10x0.14mm², PUR, grey

33483535A21XXX

- Protection level: IP65/67
- Temperature range: -40°C ... +70°C

	All rights reserved	Created by BANIUD Banciu	Inspected by COSTEA Costea	Standardisation MUNTEANV Muntean	Date 2020-07-20	State Final Release
	Department HCS - RO	Title MPP ix Type B 10p PUR		Doc-Key / ECM-Nr. 100879733/UGD/000/A 500000176542		
HARTING Customised Solutions D-32339 Espelkamp		Type TB	Number 33483535A21XXX		Rev. A	Page 1/1