


NOTICE: ALL PARTS MUST MEET TO RoHS REQUIREMENTS

REV.	DESCRIPTION	DRAWN	APPROVED	DATE
X1	NEW DRAWING	A.H	A.C	2021.07.02

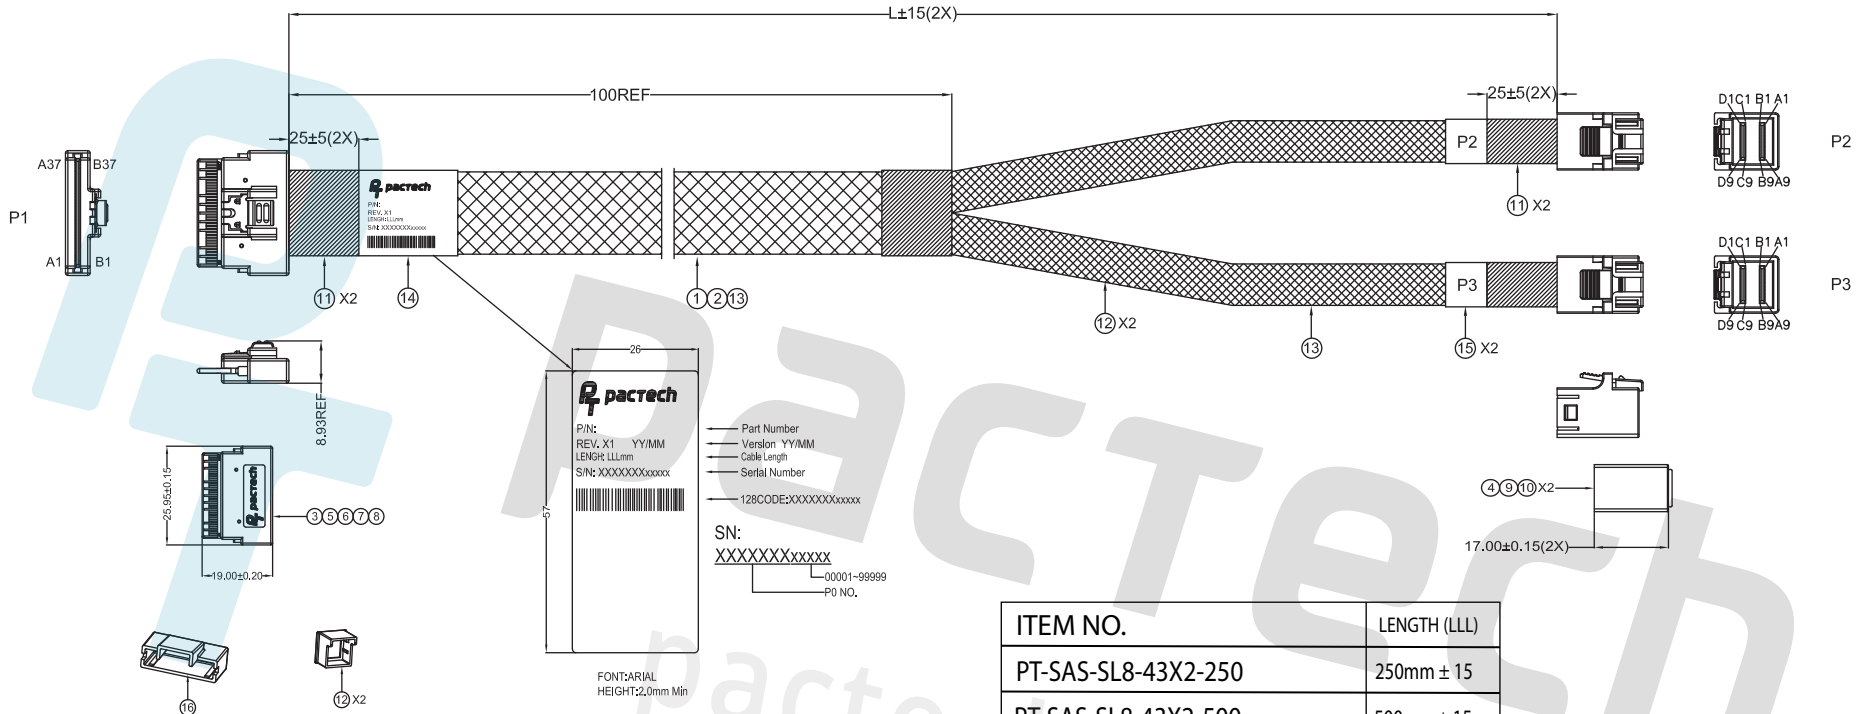

Part Number
Version YY/MM
Cable Length
Serial Number
128CODE:XXXXXXXXXXXX
SN:
XXXXXXXXXXXX
00001-99999
P0 NO.


FONT:ARIAL
HEIGHT:2.0mm Min

ITEM NO.	LENGTH (LLL)
PT-SAS-SL8-43X2-250	250mm ± 15
PT-SAS-SL8-43X2-500	500mm ± 15
PT-SAS-SL8-43X2-700	700mm ± 15
PT-SAS-SL8-43X2-750	750mm ± 15
PT-SAS-SL8-43X2-1000	1000mm ± 15

ITEM	NAME	QTY	DESCRIPTION	NOTE
16	DUST CAP	1	DUST CAP FOR SFF-8654 8i, PE, NATURAL	
15	LABEL	2	WHITE LABEL, 50*10MM(REF)	
14	LABEL	1	WHITE LABEL, 57*26MM(REF)	
13	WEAVE	A/R	PLASTIC BRAID SLEEVE, PET, GREEN,OD:10.0MM	
12	DUST CAP	2	DUST CAP FOR SFF-8643 4i, PE, NATURAL	
11	ACETATE TAPE	A/R	ACETATE TAPE, W=25MM, BLACK	
10	HOUSING	2	HOUSING FOR SFF-8643 4i STR, BLACK	
9	INNER MOLD	2	INNER MOLDING FOR SFF-8643 4i STR, BLACK	
8	RIVET	2	RIVET FOR SFF-8654	
7	LATCH	1	LATCH FOR SFF-8654	
6	HOUSING	1	HOUSING FOR SFF-8654 8i STR, BLACK	
5	INNER MOLD	1	INNER MOLDING FOR SFF-8654 8i STR, BLACK	
4	8643 4i PCB	4	PCB FOR INT. MINI SAS HD 4i STR, AU30u",100 ohm	
3	8654 8i PCB	1	PCB FOR SLIMLINE SAS 8i STR, AU30u",100 ohm	
2	WIRE	A/R	UL1571, 32AWG	
1	SAS CABLE	A/R	SAS CABLE: UL20744 30AWG	

For Customer Made Items Order:
 -Minimum \$200 value
 -NCNR(Non-cancelable&non-returnable)
 -One time tooling charge,if any,must be approved with authorized signature&date.
 -Turn around time counted ARO(After Received FA or drawing approval)



APPROVED BY
 COMPANY: _____
 PURCHASING/ENGINEER: _____
 DATE: _____

1. * ±0.1 2. ** ±0.1 3. *** ±0.05 4. FRACT.±1/32" 5. ANGULAR ±1/2'	Customer P/N: N/A	 www.pactech-inc.com TITLE SLIMSAS 8654 8i to 2x HD MiniSAS 4i DRAWING NO. PT-SAS-SL8-43X2-LLL								
	Customer REV.: N/A									
	PART NO. SEE TABLE									
	APPROVED A.C									
	CHECKED J.C									
DRAWN A.H	DATE 2021-07-02	<table border="1"> <tr> <th>UNIT</th> <th>SCALE</th> <th>SHEET</th> <th>REV.</th> </tr> <tr> <td>MM</td> <td>NONE</td> <td>1/2</td> <td>X1</td> </tr> </table>	UNIT	SCALE	SHEET	REV.	MM	NONE	1/2	X1
UNIT	SCALE	SHEET	REV.							
MM	NONE	1/2	X1							

NOTICE: ALL PARTS MUST MEET TO RoHS REQUIREMENTS


REV.	DESCRIPTION	DRAWN	APPROVED	DATE
X1	NEW DRAWING	A.H	A.C	2021.07.02

WIRING TABLE

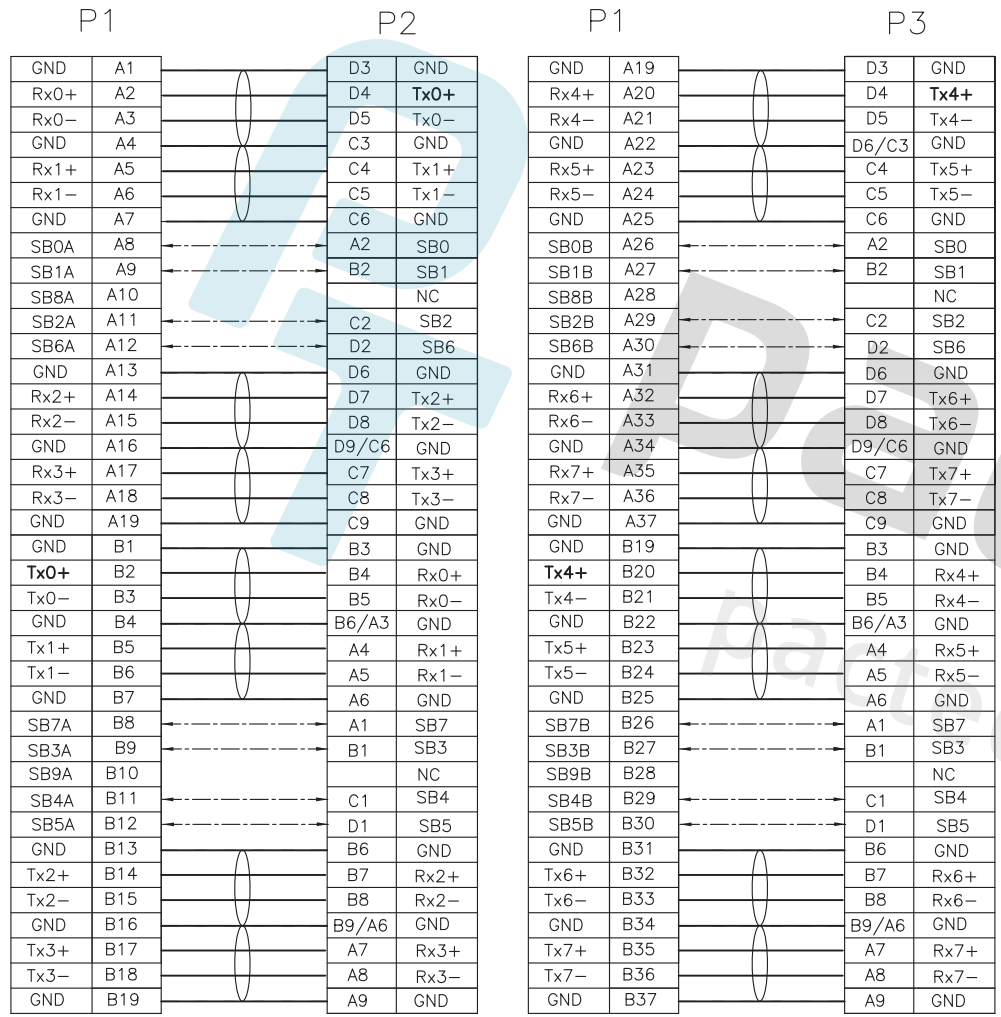

FONT:ARIAL
HEIGHT:2.0mm Min

- TEST CONDITIONS:
- 100% OPEN & SHORT & MISS-WIRING & INTERMITTENCE TEST.
 - CONDUCTIVE RESISTANCE: 3Ω MAX.
 - INSULATION RESISTANCE: 10 MΩ
 - HI-POT TEST: 300VDC FOR 10ms.
 - THIS PRODUCT MEETS PCIe4.0 .



1. * ±0.1 2. ** ±0.1 3. *** ±0.05 4. FRACT.±1/32" 5. ANGULAR ±1/2"	Customer P/N: N/A		
	Customer REV.: N/A		
	PART NO. SEE TABLE		TITLE SLIMSAS 8654 8i to 2x HD MiniSAS 4i
	APPROVED A.C		DRAWING NO. PT-SAS-SL8-43X2-LLL
	CHECKED J.C		UNIT SCALE SHEET REV. MM NONE 2/2 X1
DRAWN A.H	DATE 2021-07-02		