TE Internal #: 1735183-1


SAS, Plug, Wire-to-Board, 29 Position, 1 Row, 1 Port, Right Angle, Surface Mount, .049 in [1.27 mm] Centerline, Power & Signal, Board

Mount

View on TE.com >



Connectors > PCB Connectors > SAS & MiniSAS > Serial Attached SCSI (SAS) Connector Plugs

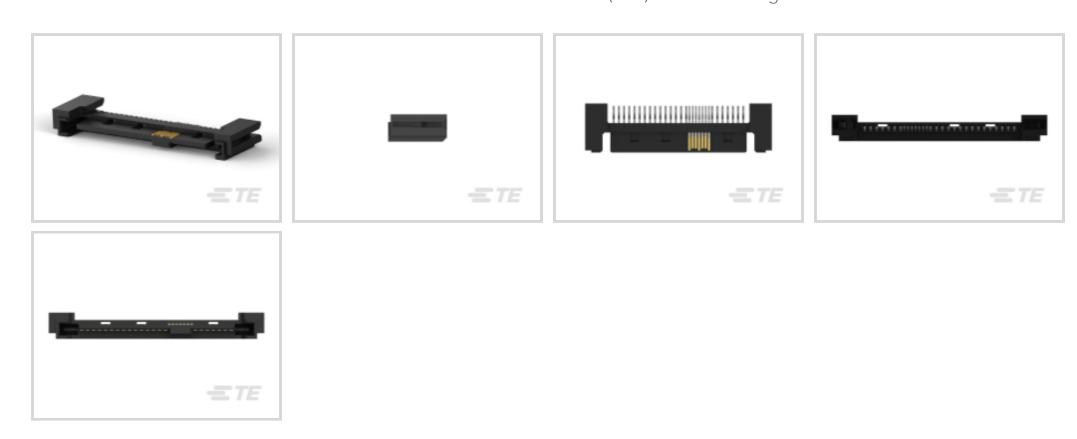

SAS Connector Type: SAS

Connector & Housing Type: Plug

Connector System: Wire-to-Board

Number of Positions: 29

Number of Rows: 1

All Serial Attached SCSI (SAS) Connector Plugs (3)

Features

Product Type Features

Shell	Without
Connector & Contact Terminates To	Printed Circuit Board
SAS Connector Type	SAS
Connector & Housing Type	Plug
Connector System	Wire-to-Board
Configuration Features	
Number of Positions	29
Number of Rows	1
Number of Ports	1
PCB Mount Orientation	Right Angle
Body Features	

Black

Contact Features

Primary Product Color



	30 μin
Contact Mating Area Plating Material	Gold
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Brass
Contact Current Rating (Max)	1.5 A
Termination Features	
Termination Method to Printed Circuit Board	Surface Mount
Mechanical Attachment	
PCB Mount Retention	Without
Connector Mounting Type	Board Mount
Housing Features	
Housing Material	Thermoplastic
Centerline (Pitch)	1.27 mm[.049 in]
Usage Conditions	
High Temperature Housing	Yes
Operating Temperature Range	-40 - 85 °C[-40 - 185 °F]
Operation/Application	
Circuit Application	Power & Signal
Industry Standards	
PCIe/SAS Generation	Gen2
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	40

Product Compliance

Packaging Method

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	

Box & Tray, Tray



Current ECHA Candidate List: JAN 2024

(240)

Candidate List Declared Against: JAN 2024

(240)

Does not contain REACH SVHC

Halogen Content

Low Bromine/Chlorine - Br and Cl < 900

ppm per homogenous material. Also BFR

/CFR/PVC Free

Solder Process Capability Reflow solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Customers Also Bought





















Documents

Product Drawings

SAS PLUG 15+7+7P,0.96mm OFFSET

English

CAD Files

Customer View Model

ENG_CVM_CVM_1735183-1_B.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_1735183-1_B.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1735183-1_B.3d_igs.zip

English

By downloading the CAD file I accept and agree to the ${\bf Terms}$ and ${\bf Conditions}$ of use.

Product Specifications

Product Specification

English

Product Specification

English