


### SFP28 | DWDM

TE Internal #: 2227316-1 SFP, Cage, Operating Temperature Range -55 - 85 °C [-67 - 185 °F], Data Rate (Max) 4 Gb/s, 1 Ports, Port Matrix Configuration 1 x 1

### View on TE.com >

Connectors > Pluggable IO Connectors & Cages > SFP Connectors

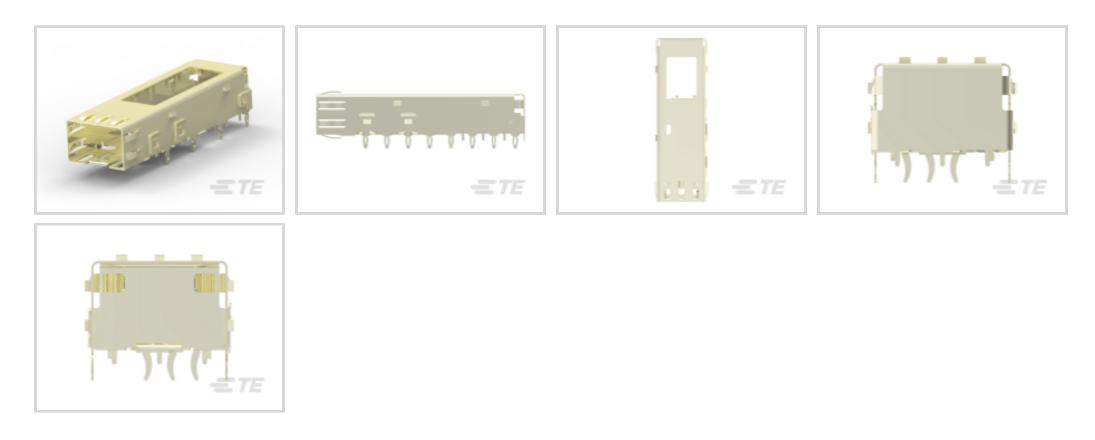

Pluggable I/O Product Type: Cage

Sealable: No

Operating Temperature Range: -55 - 85 °C [ -67 - 185 °F ]

Data Rate (Max): 4 Gb/s

Number of Ports: 1

All SFP Connectors (10)



## Features

## **Product Type Features**

Cage Туре	Single
Pluggable I/O Product Type	Cage
Sealable	No
Form Factor	SFP
Configuration Features	
Number of Ports	1
Port Matrix Configuration	1 x 1
Electrical Characteristics	
Data Rate (Max)	4 Gb/s
Termination Features	
Termination Post & Tail Length	3 mm[.118 in]
Termination Method to Printed Circuit Board	Through Hole - Press-Fit
Housing Features	

## 2227316-1

SFP, Cage, Operating Temperature Range -55 - 85 °C [-67 - 185 °F], Data Rate (Max) 4 Gb/s, 1 Ports, Port Matrix Configuration 1 x 1



Cage Material	Stainless Steel
Dimensions	
PCB Thickness (Recommended)	1.5 mm[.059 in]
Usage Conditions	
Operating Temperature Range	-55 - 85 °C[-67 - 185 °F]
Operation/Application	
Pluggable I/O Applications	SFP
Heat Sink Compatible	Yes
Packaging Features	
Packaging Method	Box
Other	
Included Lightpipe	No
EMI Containment Feature Type	Internal/External EMI Springs

## Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides

## 2227316-1

SFP, Cage, Operating Temperature Range -55 - 85 °C [-67 - 185 °F], Data Rate (Max) 4 Gb/s, 1 Ports, Port Matrix Configuration 1 x 1



on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**



TE Part # CAT-SF59-C76264
SFP Connectors



TE Part # 1888901-1 SFP+ EMI Plug



TE Part # 1367147-1 SFP COVER, UNPLATED



TE Part # 1367147-3 SFP COVER, UNPL, NO LOGO



TE Part # 1761394-1 DUST COVER, SFP, GANGED & STACKED



Also in the Series | DWDM



Pluggable IO Connectors & Cages(4)

# **Customers Also Bought**



## 2227316-1

SFP, Cage, Operating Temperature Range -55 - 85 °C [-67 - 185 °F], Data Rate (Max) 4 Gb/s, 1 Ports, Port Matrix Configuration 1 x 1







## Documents

Product Drawings DWDM Cage Assembly, 11 PF

English

CAD Files 3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_2227316-1\_A.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_2227316-1\_A.3d\_igs.zip

English

Customer View Model

```
ENG_CVM_CVM_2227316-1_A.3d_stp.zip
```

English

By downloading the CAD file I accept and agree to the **Terms and Conditions**of use.

Product Specifications Product Specification

English